



Device for controlling limit switches

New

LVT_{MFC}

For mini-actuator LVT

- Limit switch electronic control device for LVT telescopic actuators
- Relay device for controlling two limit switches
- Power Supply 12-24 VDC selectable with JP1/JP2
- Stabilized power supply 12 or 24 VDC, $\pm 0,5V$
- Maximum current 4A
- Fuse incorporated and calibrated on request
- Duty Cycle 100% a 25°C
- Built-in motor brake with automatic insertion
- Automatic operation / Manual
- Automatic mode activation with JP3/JP4
- Inputs for Forward and Back buttons
- Inputs for NPN or PNP limit switches on request
- Metal casing with M4 fixing fins
- Working T°: -10°C +40°C
- Class of protection IP30
- Configured to operate in "Man's switch" (the actuator advances only if the forward and backward buttons remain pressed) or "Automatic" (pressing only once the forward and backward buttons the actuator advances until the respective limit switch)

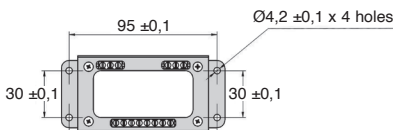


Applications

- Small automatic machines, general automatisms, packaging industry, home automation, agricultural automation, transport vehicles, sweepers, etc.
- Particularly suitable for applications that require minimal vibration, low noise and low cost.

Info

- Buttons to activate the actuator not supplied
- Does not drive the mini-actuator LVT



DISCOUNTS

Qty	1+	2+	4+
Disc.	List	-15%	On request

Part number	Voltage (V)	Configuration	Price each
LVT-MFC-12M	12	Man's switch	161,98 €
LVT-MFC-24M	24	Man's switch	161,98 €
LVT-MFC-12A	12	Automatic	161,98 €
LVT-MFC-24A	24	Automatic	161,98 €

All dimensions in mm

HPC


www.hpceurope.com

Tel. +33(0)4 37 496 496


Adjust the B1 and B2 limit switch sensors to prevent the actuator from plugging to the mechanical limit switch.

The electric limit switch must intervene a few millimetres before the mechanical limit switch.


Note: If after the electrical connection the actuator should move in the opposite direction to the logic of operation of the control, it is sufficient to exchange the position of the RD and BK wires of the Engine M1.



Man's switch operation

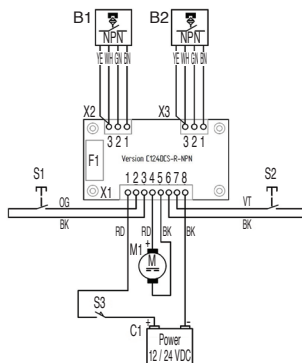

Automatic operation

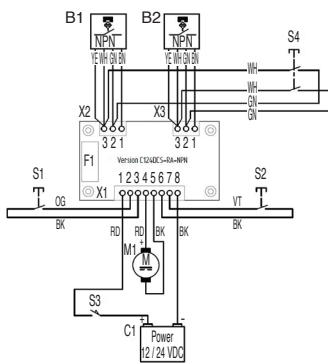

Sensor cable colours B1-B2

YE = yellow / WH = white / GN = green / BN = brown

For PNP version do not connect yellow sensore cable

Warning: this control device is not suitable for "Safety-critical system" applications in which the malfunction of this device would cause a significant increase in the safety risk for the people and/or the environment in question, causing loss of life, serious injury or serious environmental damage. The user who decides to use this device in "Safety-critical system" applications does so at his own risk.

Nos autres produits



SLB
Bouton d'indexage,
inox



BPM-Z
Poussoir plastique à
bille à ressort avec
fente, Corps plastique
+...




CHAR
Charnière à ressort, à
visser



UGH40
Unité de guidage en
H, Pour vérins Ø40



PR40
Pied à rotule Ø50, Ø
50



PB
Roulement plastique à
contact radial,
Plastique - billes verre



RFV50
Réducteur à roue et
vis sans fin inox,
jusqu'à 80Nm



CHML63
Réducteur à roue et
vis sans fin, jusqu'à
138 Nm - Avec
limiteur ...




AT5M AT10M
Courroie ouverte au
mètre type AT, AT10
Polyuréthane



PGT
Profil pour
coulissement de
panneaux, Profil pour



PW_PWG3
Vis sans fin de
précision, Acier



PTA80
Pied articulé à
embase tôle Ø80, Ø
80

Produits complémentaires



LVT
Mini vérin motorisé
1A, 1 ampère



LVT
Mini vérin motorisé
1A, 1 ampère



LVT
Mini vérin motorisé
1A, 1 ampère



LVT
Mini vérin motorisé
1A, 1 ampère