

# Flush fitting ball transfer unit

For light loads

BPLE

- **Pressed steel ball transfer unit**
- Push fit for rapid installation & replacement where only single-sided access to the mounting surface is available
- For light loads
- Housing made from pressed steel
- With drainage hole and felt seal
- Orientation: horizontal with ball upwards
- Max. speed: 1m/s
- Working temperature range: -20 to +70°C
- Materials:


**BPL** : galvanised steel body and steel balls

**BPL/SS** : stainless steel body and stainless steel 420 balls



## Advantages

- Optional clips compensate for irregularities in seat bore diameter

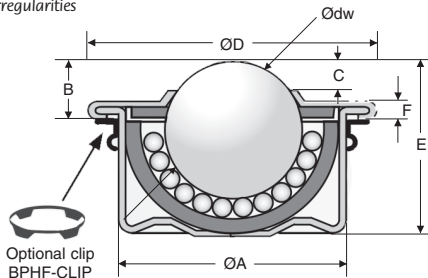

## DISCOUNTS

Qty	1+	6+	20+	40+	60+
Disc.	Net	-10%	-15%	-20%	On request

Part N°	Ødw ball	ØA	B	C	ØD	E	F	Carrying capacity (kg)	Weight (g)	Stock*	Price each
											1 to 5
<b>Steel body, steel balls</b>											
BPLE15-24	15	24	9,5	4,6	31	21,0	2,8	60	0,041	✓	3,63 €
BPLE22-36	22	36	9,8	3,9	45	29,5	2,9	160	0,128	✓	6,67 €
BPLE30-45	30	45	13,8	6,8	55	37,0	3,6	280	0,253	✓	10,08 €
BPLE45-62	45	62	19,0	9,0	75	53,5	4,0	600	0,720	-	48,86 €
<b>Stainless steel body, stainless steel balls</b>											
BPLE15-24/SS	15	24	9,5	4,6	31	21,0	2,8	40	0,039	✓	11,23 €
BPLE22-36/SS	22	36	9,8	3,9	45	29,5	2,9	90	0,125	✓	14,35 €
BPLE30-45/SS	30	45	13,8	6,8	55	37,0	3,6	200	0,271	✓	24,41 €
BPLE45-62/SS	45	62	19,0	9,0	75	53,5	4,0	260	0,710	-	117,92 €

\*Depending on availability - Dimensions in mm

## Our other products




FBL4004\_K32

Brush strip per metre,  
Black striated  
polypropylene (PP)



RTE

Rotex®, jaw coupling,  
Aluminium



CHB

Worm and wheel gear  
reducer, up to 22 Nm



MEF

Cylindrical sintered  
ferrous bush, Self-  
lubricating FP20  
ferrous all...



RTN

BoWex® curved tooth  
gear coupling, Nylon



PTAF100-PAMF100

Articulated fixable  
foot with pressed  
base Ø100, Ø 100



DCA

Suction cup, 1.5  
bellows, natural  
rubber



PLC\_PLT

Magnetic stud with  
threaded hole, With  
threaded hole



SCH

Horizontal hook  
toggle clamp,



VPRA\_M

Handwheel with  
handle,



PHT

Pull handle, Up to 250  
°C



VTLF

3 lobed handle,  
Polyamide - Brass

## Complementary products



BPHFclip

Clip for ball transfer  
unit, Insert clip -  
Installing from above



BPL

Ball transfer unit light  
duty, Light



BPLE

Ball transfer unit push  
fit, Light



BPPE

Ball transfer unit push  
fit, Light