

Flush fitting ball transfer unit

For light loads

BPLE

- **Pressed steel ball transfer unit**
- Push fit for rapid installation & replacement where only single-sided access to the mounting surface is available
- For light loads
- Housing made from pressed steel
- With drainage hole and felt seal
- Orientation: horizontal with ball upwards
- Max. speed: 1m/s
- Working temperature range: -20 to +70°C
- Materials:


BPL : galvanised steel body and steel balls

BPL/SS : stainless steel body and stainless steel 420 balls



Advantages

- Optional clips compensate for irregularities in seat bore diameter

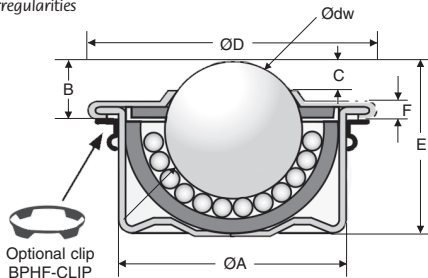

DISCOUNTS

Qty	1+	6+	20+	40+	60+
Disc.	Net	-10%	-15%	-20%	On request

Part N°	Ødw ball	ØA	B	C	ØD	E	F	Carrying capacity (kg)	Weight (g)	Stock*	Price each 1 to 5
Steel body, steel balls											
BPLE15-24	15	24	9,5	4,6	31	21,0	2,8	60	0,041	✓	3,63 €
BPLE22-36	22	36	9,8	3,9	45	29,5	2,9	160	0,128	✓	6,67 €
BPLE30-45	30	45	13,8	6,8	55	37,0	3,6	280	0,253	✓	10,08 €
BPLE45-62	45	62	19,0	9,0	75	53,5	4,0	600	0,720	-	48,86 €
Stainless steel body, stainless steel balls											
BPLE15-24/SS	15	24	9,5	4,6	31	21,0	2,8	40	0,039	✓	11,23 €
BPLE22-36/SS	22	36	9,8	3,9	45	29,5	2,9	90	0,125	✓	14,35 €
BPLE30-45/SS	30	45	13,8	6,8	55	37,0	3,6	200	0,271	✓	24,41 €
BPLE45-62/SS	45	62	19,0	9,0	75	53,5	4,0	260	0,710	-	117,92 €


*Depending on availability - Dimensions in mm

Our other products



CHAM5270SS

Marine hinge for welding/screw mounting, Marine



BCM_MPBT

Modular cylindrical brush, PBT polyester bristles



AT5M AT10M

AT type timing belt per metre, AT10 Steel cored polyurethane



F7-SF-SM

Multifunction display, Mounting bracket for front mounting



BUH77

Motor-gearbox 12V and 24V DC, from 0.1 to 2 Nm



VEL

Self-gripping cable strip, electric and pneumatic cables



FBL6000_K13

Brush strip per meter PP fibres Ø0.2, Black striated polypropylene



DOM120

Accessories, Clamping lever



RJUM05

Drylin R® linear bearing housing, Closed - Long



PCS50SS

Chain sprocket - Stainless steel, 12.7mm (DIN 08B-1)



HW_HT

Half-rail guide, Wheel



DOG258

Motor-gearbox 12V and 24V DC, from 12 to 15 Nm

Complementary products



BPHClip

Clip for ball transfer unit, Insert clip - Installing from above



BPL

Ball transfer unit light duty, Light



BPLE

Ball transfer unit push fit, Light



BPPE

Ball transfer unit push fit, Light