

# Flush fitting ball transfer unit

For light loads

BPLE

- **Pressed steel ball transfer unit**
- Push fit for rapid installation & replacement where only single-sided access to the mounting surface is available
- For light loads
- Housing made from pressed steel
- With drainage hole and felt seal
- Orientation: horizontal with ball upwards
- Max. speed: 1m/s
- Working temperature range: -20 to +70°C
- Materials:


**BPL** : galvanised steel body and steel balls

**BPL/SS** : stainless steel body and stainless steel 420 balls



## Advantages

- Optional clips compensate for irregularities in seat bore diameter

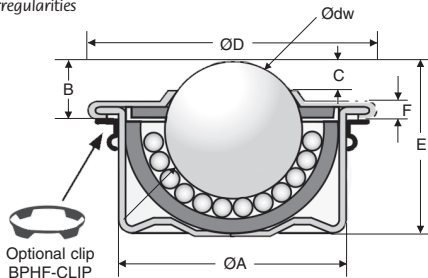

## DISCOUNTS

Qty	1+	6+	20+	40+	60+
Disc.	Net	-10%	-15%	-20%	On request

Part N°	Ødw ball	ØA	B	C	ØD	E	F	Carrying capacity (kg)	Weight (g)	Stock*	Price each 1 to 5
<b>Steel body, steel balls</b>											
BPLE15-24	15	24	9,5	4,6	31	21,0	2,8	60	0,041	✓	3,63 €
BPLE22-36	22	36	9,8	3,9	45	29,5	2,9	160	0,128	✓	6,67 €
BPLE30-45	30	45	13,8	6,8	55	37,0	3,6	280	0,253	✓	10,08 €
BPLE45-62	45	62	19,0	9,0	75	53,5	4,0	600	0,720	-	48,86 €
<b>Stainless steel body, stainless steel balls</b>											
BPLE15-24/SS	15	24	9,5	4,6	31	21,0	2,8	40	0,039	✓	11,23 €
BPLE22-36/SS	22	36	9,8	3,9	45	29,5	2,9	90	0,125	✓	14,35 €
BPLE30-45/SS	30	45	13,8	6,8	55	37,0	3,6	200	0,271	✓	24,41 €
BPLE45-62/SS	45	62	19,0	9,0	75	53,5	4,0	260	0,710	-	117,92 €

\*Depending on availability - Dimensions in mm

## Our other products



PLM-C  
Cylindrical holding magnets, Cylindrical holding magnet



SUPss  
Self-centering clamping hub stainless steel, Without locknut



BAGSS  
Stainless steel Clamping collar, Stainless steel



T5M T10M  
T type timing belt per metre, T10 Steel cored polyurethane



LRX  
Linear roller slide, Rail - from 9410 N to 101000 N



PM4  
Worm and wheel set, Hardened steel



BOX-TOR-H  
Box set of Nitrile O-rings in nitrile, 3.00 x 2.00mm to 45.20 x 4.00



BLHM70  
Right angled gearbox, up to 128 Nm




TUBE25\_25  
Square Tube, Aluminium or Stainless steel



AC144  
Strike for toggle latch, 22mm



DIA  
Ring operated locking bolt, with ring



M1  
Worm and wheel set, Machined plastic (delrin)

## Complementary products



BPHFclip  
Clip for ball transfer unit, Insert clip - Installing from above



BPL  
Ball transfer unit light duty, Light



BPLE  
Ball transfer unit push fit, Light



BPPE  
Ball transfer unit push fit, Light