

With male thread

CLBT
CLBTss

- Clamp lever with male thread and flattened end according to DIN 78

Materials:

Insert: steel (class 5.8) or


stainless steel (303)

Handle: diecast zinc,

complies with DIN 1743

- Finish: Blackened steel

With threaded shaft



Uses


- The lever is normally in a locked position
- Raise the handle to release the lever and turn to required position
- When handle is released, lever will automatically lock in new position

Options

- Alternate lengths of threaded shaft available for orders of more than 10 pieces

Info.

- H4 = clearance height required for handle

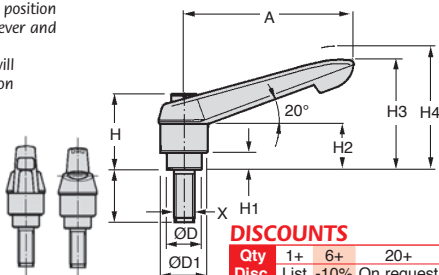

DISCOUNTS

| Qty | 1+ | 6+ | 20+ |
|-------|------|------|------------|
| Disc. | List | -10% | On request |

| Part number | | Threaded rod X | H1 | L | | ØD | ØD1 | ØD2 |
|-------------|------------|----------------|------|-------|-----------|------|------|------|
| Steel | Stainless | | | Steel | Stainless | | | |
| CLB01T5 | CLB01T5SS | M5 | 4,0 | 50 | 25 | 10,0 | 13,0 | 14,5 |
| CLB01T6 | CLB01T6SS | M6 | 4,0 | 50 | 50 | 10,0 | 13,0 | 14,5 |
| CLB02T8 | CLB02T8SS | M8 | 6,5 | 60 | 60 | 13,5 | 18,0 | 19,5 |
| CLB02T10 | CLB02T10SS | M10 | 6,5 | 60 | 60 | 13,5 | 18,0 | 19,5 |
| CLB03T10 | CLB03T10SS | M10 | 10,0 | 60 | 60 | 16,0 | 21,5 | 23,0 |
| CLB04T10 | - | M10 | 10,0 | 90 | - | 19,0 | 25,5 | 27,5 |
| CLB04T12 | CLB04T12SS | M12 | 10,0 | 90 | 60 | 19,0 | 25,5 | 27,5 |
| CLB05T12 | - | M12 | 12,0 | 90 | - | 23,0 | 30,0 | 32,5 |
| CLB05T16 | CLB05T16SS | M16 | 12,0 | 90 | 60 | 23,0 | 30,0 | 32,5 |

| Part number | | H | | | | A | | | N° of teeth | Stock* | Price each 1 to 5 | | |
|-------------|------------|------|------|------|------|-----|-------|------|-------------|--------|-------------------|-----------|---------|
| Steel | Stainless | H | H2 | H3 | H4 | A | A1 | B | | | Steel | Stainless | |
| CLB01T5 | CLB01T5SS | 24,5 | 15,0 | 30,0 | 33,5 | 40 | 47,0 | 7,5 | 16 | ✓ | ✓ | 13,26 € | 17,02 € |
| CLB01T6 | CLB01T6SS | 24,5 | 15,0 | 30,0 | 33,5 | 40 | 47,0 | 7,5 | 16 | ✓ | ✓ | 13,26 € | 18,30 € |
| CLB02T8 | CLB02T8SS | 28,5 | 17,5 | 41,5 | 45,5 | 65 | 75,0 | 9,5 | 20 | ✓ | ✓ | 16,40 € | 22,71 € |
| CLB02T10 | CLB02T10SS | 28,5 | 17,5 | 41,5 | 45,5 | 65 | 75,0 | 9,5 | 20 | ✓ | ✓ | 16,40 € | 22,63 € |
| CLB03T10 | CLB03T10SS | 37,0 | 24,0 | 53,5 | 58,0 | 80 | 91,5 | 11,0 | 22 | ✓ | ✓ | 18,15 € | 25,85 € |
| CLB04T10 | - | 43,0 | 26,0 | 61,0 | 66,0 | 95 | 109,0 | 13,0 | 24 | ✓ | - | 21,68 € | - |
| CLB04T12 | CLB04T12SS | 43,0 | 26,0 | 61,0 | 66,0 | 95 | 109,0 | 13,0 | 24 | ✓ | ✓ | 18,15 € | 33,25 € |
| CLB05T12 | - | 49,0 | 33,0 | 72,0 | 77,0 | 110 | 126,0 | 15,5 | 26 | ✓ | - | 27,29 € | - |
| CLB05T16 | CLB05T16SS | 49,0 | 33,0 | 72,0 | 77,0 | 110 | 126,0 | 15,5 | 26 | ✓ | - | 27,29 € | 42,42 € |

*Depending on availability - Dimensions in mm

Our other products



BIM
Indexing plunger mini,
miniature



GLT2-17
Telescopic drawer
runners for groove
mounting, Partial
extension



MEB
Moulded plastic bevel
gear (nylon), 1:1



BG
Oldham coupling,
With set screw



INS_BR
Self tapping brass
insert, Brass



SUPTOOL
Installation tools for
clamping hub, For
hexagonal clamping
hub




CNA-CNG
Right angled
mounting plate, Right
angled mounting
plate for clevis



WSS
Symmetrical S shaped
hook, Steel



VB
Small 6 lobe threaded
handle - female,



H1
Crossed helical gear
crossed axis at 90°,



OP3_14_06
Reducing sleeve for
OP indicators,



RTE
Rotex®, jaw coupling,
cast iron

Complementary products



PCLA_T
Technopolymer
clamping lever - male,
Plastic



CLASS
Stainless steel
indexing handle -
male, Stainless steel



PCLA_T
Technopolymer
clamping lever - male,
Plastic



PCLA_M
Technopolymer
clamping lever -
female, Plastic