


- **Highly deformable thus absorbing large amounts of energy**
- Energy absorbed gradually
- Progressive absorption of energy
- Materials
 - core: Steel plates
 - cylinder: Rubber
- **Hardness: NK 55-60 shore A**
- Working temp: -40°C to +70°C

Applications

- Shock-absorbing stop

Info.

- **Not sold individually, please contact us for details**
- Values for loads and rigidity are given as a guide only

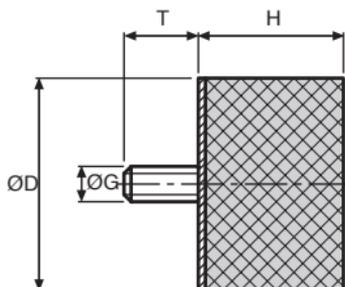

DISCOUNTS ^A

| Qty | 1+ | 6+ | 20+ | 40+ | 100+ | 200+ |
|-------|------|------|------|------|------|------------|
| Disc. | List | -10% | -20% | -30% | -40% | On request |

| Part number | ØG | ØD | H | T | Compression | | Stock ^A | Price each 1 to 5 |
|-------------|----|----|----|----|---------------------|------------------|--------------------|----------------------|
| | | | | | stiffness (N/mm) | Max. load (N) | | |
| D-ZY4-10-10 | M4 | 10 | 10 | 10 | 38 | 43 | ✓ | Ⓐ 1,41 € |
| D-ZY4-15-8 | M4 | 15 | 8 | 10 | 122 | 95 | ✓ | Ⓐ 1,52 € |
| D-ZY4-15-10 | M4 | 15 | 10 | 10 | 106 | 95 | ✓ | Ⓐ 1,66 € |
| D-ZY4-15-15 | M4 | 15 | 15 | 10 | 74 | 95 | ✓ | Ⓐ 1,66 € |
| D-ZY6-20-15 | M6 | 20 | 15 | 18 | 138 | 170 | ✓ | Ⓐ 1,84 € |
| D-ZY6-20-20 | M6 | 20 | 20 | 18 | - | - | ✓ | Ⓐ 2,02 € |
| D-ZY6-20-25 | M6 | 20 | 25 | 18 | - | - | ✓ | Ⓐ 2,11 € |
| D-ZY6-25-10 | M6 | 25 | 10 | 18 | - | - | ✓ | Ⓐ 2,02 € |
| D-ZY6-25-15 | M6 | 25 | 15 | 18 | 254 | 280 | ✓ | Ⓐ 2,28 € |
| D-ZY6-25-20 | M6 | 25 | 20 | 18 | 128 | 280 | ✓ | Ⓐ 2,37 € |
| D-ZY6-25-25 | M6 | 25 | 25 | 18 | - | - | ✓ | Ⓐ 2,64 € |
| D-ZY6-25-30 | M6 | 25 | 30 | 18 | 80 | 280 | ✓ | Ⓐ 2,89 € |

^ADepending on availability - Dimensions in mm

DISCOUNTS ^A

| Qty | 1+ | 6+ | 20+ | 40+ | 100+ | 200+ |
|-------|------|------|------|------|------|------------|
| Disc. | List | -10% | -20% | -30% | -40% | On request |

DISCOUNTS ^B

| Qty | 1+ | 6+ | 10+ | 15+ | 20+ | 50+ |
|-------|------|------|------|------|------|------------|
| Disc. | List | -15% | -20% | -25% | -30% | On request |

| Part number | ØG | ØD | H | T | Compression | | Stock* | Price each 1 to 5 |
|---------------|-----|-----|----|----|---------------------|------------------|--------|----------------------|
| | | | | | stiffness (N/mm) | Max. load (N) | | |
| D-ZY8-30-20 | M8 | 30 | 20 | 20 | 200 | 400 | ✓ | A 3,54 € |
| D-ZY8-30-25 | M8 | 30 | 25 | 20 | - | - | ✓ | A 3,71 € |
| D-ZY8-30-30 | M8 | 30 | 30 | 20 | 120 | 400 | ✓ | A 3,95 € |
| D-ZY8-30-40 | M8 | 30 | 40 | 20 | - | - | ✓ | A 4,85 € |
| D-ZY8-40-20 | M8 | 40 | 20 | 23 | - | - | ✓ | A 4,77 € |
| D-ZY8-40-30 | M8 | 40 | 30 | 23 | 23 | 234 | ✓ | A 5,46 € |
| D-ZY8-40-40 | M8 | 40 | 40 | 23 | - | - | ✓ | A 6,24 € |
| D-ZY10-40-30 | M10 | 40 | 30 | 28 | - | - | ✓ | A 5,46 € |
| D-ZY10-50-20 | M10 | 50 | 20 | 28 | 680 | 1000 | ✓ | A 6,61 € |
| D-ZY10-50-30 | M10 | 50 | 30 | 28 | 425 | 1000 | ✓ | A 7,84 € |
| D-ZY10-50-40 | M10 | 50 | 40 | 28 | - | - | ✓ | A 8,72 € |
| D-ZY10-50-45 | M10 | 50 | 45 | 28 | - | - | - | A 9,33 € |
| D-ZY10-50-50 | M10 | 50 | 50 | 28 | - | - | ✓ | A 10,30 € |
| D-ZY10-60-40 | M10 | 60 | 40 | 28 | - | - | ✓ | A 14,11 € |
| D-ZY10-70-45 | M10 | 70 | 45 | 28 | - | - | - | A 19,57 € |
| D-ZY12-60-40 | M12 | 60 | 40 | 33 | - | - | ✓ | B 9,15 € |
| D-ZY12-75-25 | M12 | 75 | 25 | 37 | 2000 | 2300 | ✓ | B 8,70 € |
| D-ZY12-75-40 | M12 | 75 | 40 | 37 | 810 | 2300 | - | B 13,13 € |
| D-ZY12-75-50 | M12 | 75 | 50 | 37 | - | - | - | B 13,70 € |
| D-ZY12-75-55 | M12 | 75 | 55 | 37 | - | - | ✓ | B 14,46 € |
| D-ZY16-100-50 | M16 | 100 | 50 | 41 | 1578 | 4200 | ✓ | B 24,18 € |
| D-ZY16-100-55 | M16 | 100 | 55 | 41 | 860 | 4200 | - | B 25,41 € |

*Depending on availability - Dimensions in mm

- Highly deformable thus allowing high levels of energy to be absorbed.
- Progressive deformation
- Materials:
 - Core: Stainless steel plates (A2)
 - Head: Rubber
- **Hardness: NK 55-60 Shore A**
- Working temp: -40°C to +70°C




Applications

- Shock absorbing stop

Info.

- Not sold individually, please contact us for details
- Load and stiffness figures are given as a guide only

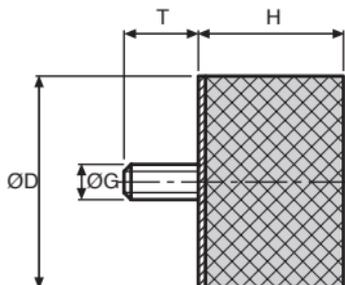

DISCOUNTS

| | | | | | |
|-------|------|------|------|------|------------|
| Qty | 1+ | 6+ | 20+ | 40+ | 100+ |
| Disc. | List | -10% | -15% | -20% | On request |

| Part number | ØG | ØD | H | T | Compression Stiffness (N/mm) | Max load (N) | Stock* | Price each 1 to 5 |
|----------------|----|----|----|----|------------------------------|--------------|--------|-------------------|
| D-ZY4-10-10/SS | M4 | 10 | 10 | 10 | 38 | 43 | ✓ | 2,09 € |
| D-ZY4-15-8/SS | M4 | 15 | 8 | 10 | 122 | 95 | ✓ | 3,55 € |
| D-ZY4-15-10/SS | M4 | 15 | 10 | 10 | 106 | 95 | ✓ | 2,56 € |
| D-ZY4-15-15/SS | M4 | 15 | 15 | 10 | 74 | 95 | ✓ | 2,80 € |
| D-ZY6-20-15/SS | M6 | 20 | 15 | 18 | 138 | 170 | ✓ | 3,67 € |
| D-ZY6-20-20/SS | M6 | 20 | 20 | 18 | - | - | ✓ | 3,78 € |
| D-ZY6-20-25/SS | M6 | 20 | 25 | 18 | - | - | ✓ | 3,57 € |
| D-ZY6-25-10/SS | M6 | 25 | 10 | 18 | - | - | ✓ | 3,24 € |
| D-ZY6-25-15/SS | M6 | 25 | 15 | 18 | 254 | 280 | ✓ | 3,63 € |
| D-ZY6-25-20/SS | M6 | 25 | 20 | 18 | 128 | 280 | ✓ | 4,02 € |
| D-ZY6-25-25/SS | M6 | 25 | 25 | 18 | - | - | ✓ | 4,43 € |
| D-ZY6-25-30/SS | M6 | 25 | 30 | 18 | 80 | 280 | ✓ | 4,78 € |

DISCOUNTS

| | | | | | |
|-------|------|------|------|------|------------|
| Qty | 1+ | 6+ | 20+ | 40+ | 100+ |
| Disc. | List | -10% | -15% | -20% | On request |

| Part number | ØG | ØD | H | T | Compression | | Stock* | Price each 1 to 5 |
|------------------|-----|-----|----|----|---------------------|-----------------|--------|----------------------|
| | | | | | Stiffness (N/mm) | Max load (N) | | |
| D-ZY8-30-20/SS | M8 | 30 | 20 | 20 | 200 | 400 | ✓ | 5,42 € |
| D-ZY8-30-25/SS | M8 | 30 | 25 | 20 | - | - | ✓ | 5,99 € |
| D-ZY8-30-30/SS | M8 | 30 | 30 | 20 | 120 | 400 | ✓ | 5,94 € |
| D-ZY8-30-40/SS | M8 | 30 | 40 | 20 | - | - | ✓ | 7,98 € |
| D-ZY8-40-20/SS | M8 | 40 | 20 | 23 | - | - | ✓ | 7,39 € |
| D-ZY8-40-30/SS | M8 | 40 | 30 | 23 | 23 | 234 | ✓ | 8,29 € |
| D-ZY8-40-40/SS | M8 | 40 | 40 | 23 | - | - | ✓ | 8,77 € |
| D-ZY10-40-30/SS | M10 | 40 | 30 | 28 | - | - | ✓ | 8,35 € |
| D-ZY10-50-20/SS | M10 | 50 | 20 | 28 | 680 | 1000 | ✓ | 11,27 € |
| D-ZY10-50-30/SS | M10 | 50 | 30 | 28 | 425 | 1000 | ✓ | 11,49 € |
| D-ZY10-50-40/SS | M10 | 50 | 40 | 28 | - | - | ✓ | 12,61 € |
| D-ZY10-50-45/SS | M10 | 50 | 45 | 28 | - | - | - | 13,47 € |
| D-ZY10-50-50/SS | M10 | 50 | 50 | 28 | - | - | ✓ | 14,83 € |
| D-ZY10-60-40/SS | M10 | 60 | 40 | 28 | - | - | - | 21,81 € |
| D-ZY10-70-45/SS | M10 | 70 | 45 | 28 | - | - | - | 28,19 € |
| D-ZY12-60-40/SS | M12 | 60 | 40 | 33 | - | - | ✓ | 21,81 € |
| D-ZY12-75-25/SS | M12 | 75 | 25 | 37 | 2000 | 2300 | ✓ | 20,73 € |
| D-ZY12-75-40/SS | M12 | 75 | 40 | 37 | 810 | 2300 | - | 31,17 € |
| D-ZY12-75-50/SS | M12 | 75 | 50 | 37 | - | - | - | 32,56 € |
| D-ZY12-75-55/SS | M12 | 75 | 55 | 37 | - | - | - | 34,13 € |
| D-ZY16-100-25/SS | M16 | 100 | 25 | 41 | - | - | - | 50,11 € |
| D-ZY16-100-50/SS | M16 | 100 | 50 | 41 | 1578 | 4200 | - | 66,51 € |
| D-ZY16-100-55/SS | M16 | 100 | 55 | 41 | 860 | 4200 | - | 68,87 € |

*Depending on availability - Dimensions in mm


- Highly deformable thus absorbing large amounts of energy
- Energy absorbed gradually
- Material:
 - Core: Steel plates
 - Cylinder: Rubber
- Hardness NK 55-60 shore A
- Working temp: -40°C to +70°C

Applications

- Shock absorbing stop

Info.

- Not sold individually, please contact us for details
- Values for loads and rigidity are given as a guide only

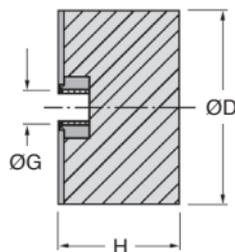

DISCOUNTS

| Qty | 1+ | 6+ | 20+ | 40+ | 100+ | 200+ |
|-------|------|------|------|------|------|------------|
| Disc. | List | -10% | -15% | -20% | -25% | On request |

| Part number | ØG | ØD | H | Compression | | Stock* | Price each 1 to 5 |
|--------------|-----|----|----|---------------------|------------------|--------|----------------------|
| | | | | stiffness (N/mm) | Max. load (N) | | |
| E-ZY4-10-10 | M4 | 10 | 10 | 38 | 43 | ✓ | 1,41 € |
| E-ZY4-10-15 | M4 | 10 | 15 | - | - | ✓ | 1,76 € |
| E-ZY4-15-15 | M4 | 15 | 15 | 74 | 95 | ✓ | 1,76 € |
| E-ZY6-20-15 | M6 | 20 | 15 | 138 | 170 | ✓ | 2,11 € |
| E-ZY6-20-20 | M6 | 20 | 20 | - | - | ✓ | 2,19 € |
| E-ZY6-25-10 | M6 | 25 | 10 | - | - | ✓ | 2,11 € |
| E-ZY6-25-20 | M6 | 25 | 20 | 128 | 280 | ✓ | 2,46 € |
| E-ZY6-25-30 | M6 | 25 | 30 | 80 | 280 | ✓ | 2,99 € |
| E-ZY8-30-15 | M8 | 30 | 15 | - | - | ✓ | 3,34 € |
| E-ZY8-30-17 | M8 | 30 | 17 | - | - | ✓ | 3,49 € |
| E-ZY8-30-20 | M8 | 30 | 20 | 200 | 400 | ✓ | 3,71 € |
| E-ZY8-30-30 | M8 | 30 | 30 | 120 | 400 | ✓ | 4,23 € |
| E-ZY8-40-30 | M8 | 40 | 30 | 23 | 234 | ✓ | 5,46 € |
| E-ZY10-50-20 | M10 | 50 | 20 | 680 | 1000 | ✓ | 6,61 € |
| E-ZY10-50-30 | M10 | 50 | 30 | 425 | 1000 | - | 7,84 € |
| E-ZY10-50-40 | M10 | 50 | 40 | - | - | ✓ | 8,72 € |
| E-ZY10-50-50 | M10 | 50 | 50 | - | - | ✓ | 10,39 € |
| E-ZY12-75-25 | M12 | 75 | 25 | 2000 | 2300 | ✓ | 15,77 € |
| E-ZY12-75-55 | M12 | 75 | 55 | - | - | ✓ | 23,27 € |

*Depending on availability - Dimensions in mm

- Highly deformable thus allowing high levels of energy to be absorbed
- Progressive deformation
- Materials:
 - Core: Stainless steel plates (A2)
 - Head: Rubber
- **Hardness: NK 55-60 Shore A**
- Working temp: -40°C to +70°C


Applications

- Shock absorbing stop

Info.

- Not sold individually, please contact us for details
- Load and stiffness figures are given as a guide only

stainless steel

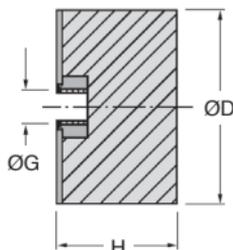

DISCOUNTS

| | | | | | |
|-------|------|------|------|------|------------|
| Qty | 1+ | 6+ | 20+ | 40+ | 100+ |
| Disc. | List | -10% | -15% | -20% | On request |

| Part number | ØG | ØD | H | Compression | | Stock* | Price each 1 to 5 |
|-----------------|-----|----|----|---------------------|-----------------|--------|----------------------|
| | | | | Stiffness (N/mm) | Max load (N) | | |
| E-ZY4-10-10/SS | M4 | 10 | 10 | 38 | 43 | ✓ | 3,13 € |
| E-ZY4-10-15/SS | M4 | 10 | 15 | - | - | - | 2,43 € |
| E-ZY4-15-15/SS | M4 | 15 | 15 | 74 | 95 | ✓ | 2,68 € |
| E-ZY6-20-15/SS | M6 | 20 | 15 | 138 | 170 | ✓ | 3,57 € |
| E-ZY6-20-20/SS | M6 | 20 | 20 | - | - | ✓ | 3,74 € |
| E-ZY6-25-10/SS | M6 | 25 | 10 | - | - | ✓ | 3,91 € |
| E-ZY6-25-20/SS | M6 | 25 | 20 | 128 | 280 | ✓ | 4,19 € |
| E-ZY6-25-30/SS | M6 | 25 | 30 | 80 | 280 | ✓ | 4,97 € |
| E-ZY8-30-15/SS | M8 | 30 | 15 | - | - | ✓ | 4,97 € |
| E-ZY8-30-17/SS | M8 | 30 | 17 | - | - | - | 4,97 € |
| E-ZY8-30-20/SS | M8 | 30 | 20 | 200 | 400 | ✓ | 5,54 € |
| E-ZY8-30-30/SS | M8 | 30 | 30 | 120 | 400 | ✓ | 6,76 € |
| E-ZY8-40-30/SS | M8 | 40 | 30 | 23 | 234 | ✓ | 8,29 € |
| E-ZY10-50-20/SS | M10 | 50 | 20 | 680 | 1000 | ✓ | 10,55 € |
| E-ZY10-50-30/SS | M10 | 50 | 30 | 425 | 1000 | ✓ | 11,49 € |
| E-ZY10-50-40/SS | M10 | 50 | 40 | - | - | ✓ | 12,54 € |
| E-ZY10-50-50/SS | M10 | 50 | 50 | - | - | - | 14,83 € |
| E-ZY12-75-25/SS | M12 | 75 | 25 | 2000 | 2300 | - | 22,73 € |
| E-ZY12-75-55/SS | M12 | 75 | 55 | - | - | - | 33,34 € |

*Depending on availability - Dimensions in mm

Conical progressive stop



D-PAR D-KON

Male mounting


- Highly deformable thus absorbing large amounts of energy
- Energy absorbed gradually
- Materials
core: Steel plates
cylinder: Rubber
- Hardness: NK 55-60 shore A
- Working temp: -40°C to +70°C

Applications


- Shock-absorbing stop

Info

- **D-KON12-80-30
square base 80x80mm

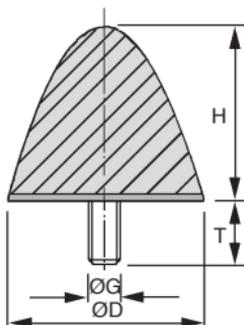

Type D-PAR

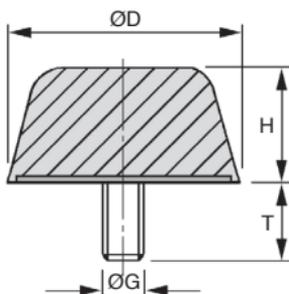

Type D-KON



DISCOUNTS A

| Qty | 1+ | 6+ | 20+ | 40+ | 100+ | 200+ |
|-------|-----------|------|------|------|------------|------|
| Disc. | List -10% | -15% | -20% | -25% | On request | |

DISCOUNTS B

| Qty | 1+ | 6+ | 10+ | 15+ | 20+ | 50+ |
|-------|-----------|------|------|------|------------|-----|
| Disc. | List -10% | -15% | -20% | -25% | On request | |

| Part number | ØG | T | ØD | H | Stock* | Price each 1 to 5 |
|-----------------|-----|----|-----|-----|--------|-------------------|
| D-PAR6-20-24 | M6 | 18 | 20 | 24 | ✓ | A 3,25 € |
| D-PAR8-30-36 | M8 | 20 | 30 | 36 | ✓ | A 4,25 € |
| D-PAR8-35-40 | M8 | 20 | 35 | 40 | ✓ | A 6,35 € |
| D-PAR8-50-67 | M8 | 36 | 50 | 67 | ✓ | A 13,16 € |
| D-PAR10-50-58 | M10 | 28 | 50 | 58 | ✓ | A 11,59 € |
| D-PAR12-75-89 | M12 | 37 | 75 | 89 | ✓ | B 16,95 € |
| D-PAR16-115-136 | M16 | 43 | 115 | 136 | - | B 64,96 € |
| D-KON6-25-17 | M6 | 18 | 25 | 17 | ✓ | A 3,05 € |
| D-KON10-50-18 | M10 | 28 | 50 | 18 | ✓ | A 8,74 € |
| D-KON12-80-30** | M12 | 35 | 80 | 30 | ✓ | B 21,80 € |
| D-KON16-125-45 | M16 | 45 | 125 | 45 | - | B 36,46 € |

*Depending on availability - Dimensions in mm

Male mounting

D-PAR^{SS}
D-KON^{SS}

Stainless steel


- Highly deformable thus allowing high levels of energy to be absorbed.
- Progressive deformation
- Materials :
Core : Stainless steel plates (A2)
Head : Rubber
- Hardness : NK 55-60 Shore A
- Working temp: - 40°C to +70°C

Applications


- Shock-absorbing stop

Info

- **D-KON12-80-30/SS:
square base 80x80mm

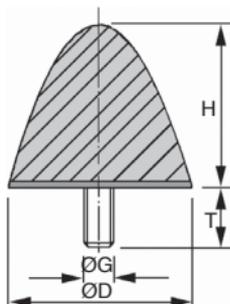

Type D-PAR^{SS}

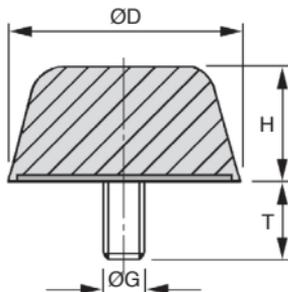

Type D-KON^{SS}

DISCOUNTS

| Qty | 1+ | 6+ | 20+ | 40+ | 100+ |
|-------|------|------|------|------|------------|
| Disc. | List | -10% | -15% | -20% | On request |

| Part number | ØG | T | ØD | H | Stock* | Price each 1 to 5 |
|--------------------|-----|----|-----|----|--------|----------------------|
| D-PAR6-20-24/SS | M6 | 18 | 20 | 24 | ✓ | 4,69 € |
| D-PAR8-30-36/SS | M8 | 20 | 30 | 36 | ✓ | 7,28 € |
| D-PAR8-35-40/SS | M8 | 20 | 35 | 40 | ✓ | 19,77 € |
| D-PAR8-50-67/SS | M8 | 36 | 50 | 67 | ✓ | 20,32 € |
| D-PAR10-50-58/SS | M10 | 28 | 50 | 58 | ✓ | 15,75 € |
| D-KON6-25-17/SS | M6 | 18 | 25 | 17 | ✓ | 4,50 € |
| D-KON10-50-18/SS | M10 | 28 | 50 | 18 | ✓ | 11,34 € |
| D-KON12-80-30/SS** | M12 | 35 | 80 | 30 | - | 60,68 € |
| D-KON16-125-45/SS | M16 | 45 | 125 | 45 | - | 131,94 € |

*Depending on availability - Dimensions in mm

- Silicone truncated cone form for applications with high hygiene requirements

- Materials:

304 stainless steel frame
Rubber-silicone cone cylinder (Elastosil MVQ)

- Hardness 55+/-5° shoreA

- Working temperature: -30°C to +200°C


Applications

- End stop

- Supporting foot

- Food industry (FDA compliant), pharmaceutical, medical.

Stainless steel

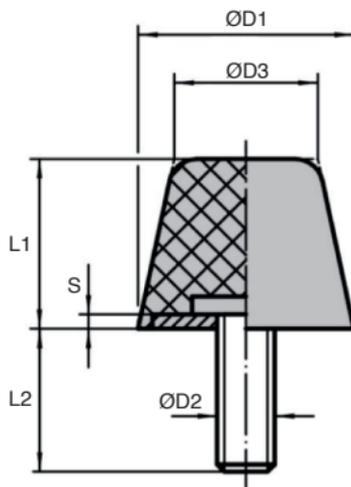

DISCOUNTS

| | | | |
|-------|-------|-----|------------|
| Qty | 1+ | 4+ | 15+ |
| Disc. | Price | -5% | On request |

| Part number | ØD1 | ØD2 | L2 | ØD3 | L1 | S | Stiffness | | Max. load (N) | Stroke | Weight (g) | Price each |
|------------------|-----|-----|----|------|------|---|-----------|------|---------------|--------|------------|------------|
| | | | | | | | R (N/mm) | R | | | | |
| D-KON5-19-16/SL | 19 | M5 | 20 | 12,0 | 16 | 2 | 63 | 250 | 4,0 | 10 | ✓ | 16,25 € |
| D-KON6-25-20/SL | 25 | M6 | 25 | 16,5 | 20,5 | 2 | 90 | 460 | 5,1 | 19 | ✓ | 17,41 € |
| D-KON8-32-26/SL | 32 | M8 | 30 | 21,0 | 26 | 2 | 117 | 760 | 6,5 | 38 | ✓ | 19,42 € |
| D-KON8-38-32/SL | 38 | M8 | 30 | 24,5 | 32 | 2 | 113 | 900 | 8,0 | 56 | ✓ | 38,76 € |
| D-KON10-50-43/SL | 50 | M10 | 40 | 32,0 | 43 | 2 | 148 | 1580 | 10,7 | 110 | ✓ | 53,03 € |

*Depending on availability - Dimensions in mm



Silicone conical elast buffer

Female mounting


E-KONSL

- Silicone truncated cone form for applications with high hygiene requirements
- Materials:
 - 304 stainless steel frame
 - Rubber-silicone cone cylinder (Elastosil MVQ)
- Hardness 55+/-5° shoreA
- Working temperature: -30°C to +200°C

Applications

- End stop
- Supporting foot
- Food industry (FDA compliant), pharmaceutical, medical.

Stainless steel

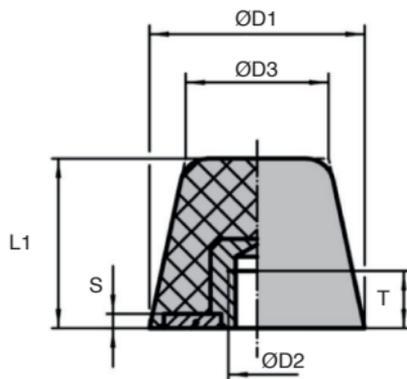

DISCOUNTS

| | | | |
|-------|-------|-----|------------|
| Qty | 1+ | 4+ | 15+ |
| Disc. | Price | -5% | On request |

| Part number | ØD1 | ØD2 | L2 | ØD3 | L1 | S | R (N/mm) | Max. load (N) | Stroke | Weight (g) | Stock* | Price each |
|------------------|-----|-----|------|------|----|----|----------|---------------|--------|------------|--------|------------|
| | | | | | | | | | | | | 1 to 3 |
| E-KON5-19-16/SL | 19 | M5 | 12,0 | 16 | 2 | 5 | 63 | 250 | 4,0 | 7 | ✓ | 16,81 € |
| E-KON6-25-20/SL | 25 | M6 | 16,5 | 20,5 | 2 | 6 | 90 | 460 | 5,1 | 14 | - | 18,46 € |
| E-KON8-32-26/SL | 32 | M8 | 21,0 | 26 | 2 | 8 | 117 | 760 | 6,5 | 20 | ✓ | 20,89 € |
| E-KON8-38-32/SL | 38 | M8 | 24,5 | 32 | 2 | 8 | 113 | 900 | 8,0 | 46 | - | 40,23 € |
| E-KON10-50-43/SL | 50 | M10 | 32,0 | 43 | 2 | 10 | 148 | 1580 | 10,7 | 96 | ✓ | 55,00 € |

*Depending on availability - Dimensions in mm