

# Simple support base (bipod)




## ESSBNV

## Plastic

- **Bipod support base**
- Component for conveyor structure
- For round tube
- Materials
  - Body: reinforced polyamide
  - Screws: stainless steel 304

### Accessories

- Add compatible **PR** feet to order (tome 5 p.169)

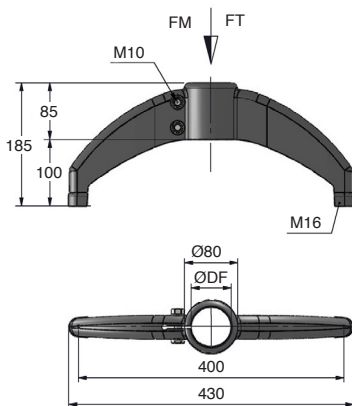

### DISCOUNTS

Qty	1+	5+	10+
Disc. List		-5%	On request

Part number	ØDF	Max. load resistance FM (N)	Max. working load FT (N)	Weight (kg)	Price each 1 to 4
ESSB-42/NV	42,4	15800	9600	0,612	43,57 €
ESSB-48/NV	48,3	15800	9600	0,612	43,57 €
ESSB-50/NV	50,8	15800	9600	0,612	43,57 €
ESSB-60/NV	60,3	15800	9600	0,752	43,57 €

Dimensions in mm

- Combined bipod support part
- Component for conveyor structure
- For round tube
- Materials

Body: reinforced polyamide


Screws: stainless steel 304

### Accessories

- Add compatible PR feet to order (tome 5 p.169)



Typical application

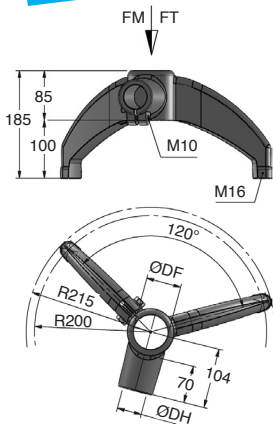

### DISCOUNTS

Qty	1+	5+	10+
Disc.	List	-5%	On request

Part number	ØDF	ØDH	Max load resistance.FM (N)	Max. working load FT (N)	Weight (kg)	Price each 1 to 4
ESCB-42-42/NV	42,4	42,4	15800	9600	0,925	51,82 €
ESCB-48-42/NV	48,3	42,4	15800	9600	0,925	51,82 €
ESCB-48-48/NV	48,3	48,3	15800	9600	0,925	51,82 €
ESCB-50-42/NV	50,8	42,4	15800	9600	0,925	51,82 €
ESCB-50-48/NV	50,8	48,3	15800	9600	0,925	51,82 €
ESCB-60-42/NV	60,3	42,4	15800	9600	0,925	51,82 €
ESCB-60-48/NV	60,3	48,3	15800	9600	0,925	51,82 €

Dimensions in mm


- **High stability**
- Component for conveyor structure
- For round tube
- Materials:

Body: reinforced polyamide



Screws: stainless steel 304

### Accessories

- Add compatible **PR** feet to order (tome 5 p.169)

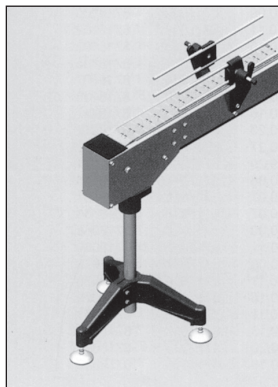

Typical application



### DISCOUNTS

Qty	1+	5+	10+
Disc.	List	-5%	On request

Part number	ØDF	Max. load resistance FM (N)	Max. working load. FT (N)	Weight (kg)	Price each 1 to 4
ESST-42/NV	42,4	15800	9600	0,975	49,46 €
ESST-48/NV	48,3	15800	9600	0,975	49,46 €
ESST-50/NV	50,8	15800	9600	0,975	49,46 €
ESST-60/NV	60,3	15800	9600	0,975	49,46 €

Dimensions in mm

## Our other products



PRFSRAD  
Dual lock for aluminium profile, Quick fitting, self locking door du...



AT5M AT10M  
AT type timing belt per metre, AT5 Steel cored polyurethane



BTE  
Universal tension arm, For normal applications



IBJss  
Ball and socket joint, Stainless steel



PW\_PWG05  
Wheel - precision range, Bronze



DIV\_SS  
Stainless steel locking bolt, With grip - Stainless steel



PTAF80-PAMF80  
Articulated fixable foot with pressed base Ø80, Ø 80



GPLbr  
Brush, brass



LRX  
Linear roller slide, Rail - from 9410 N to 101000 N



CABtool  
Fitting cable tools, Cutting tools



ACL-PL  
Joining plate for aluminium profile, Joint plate - 86x86



NCT  
Square tube connector, Fixed angle

## Complementary products



ES  
Simple support base (bipod), Plastic



ES  
Bipod support base, Plastic



PR40  
Articulated foot Ø40, Ø 40



PR40  
Articulated foot Ø50, Ø 50