

Ratio 4:1

Steel C43


- Module 1 to 5
- Teeth conform to DIN 3967 except for Module 1 models which are Gleason
- Pressure angle: 20°
- Material: steel C43
- A pair requires 2 gears

New module 1



Info.

- **Pilot bore dimensions given as a guide only and are subject to change.

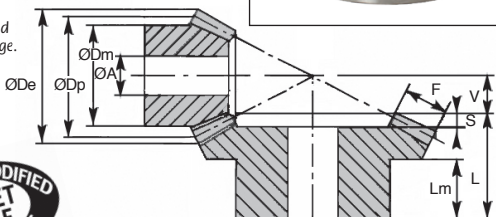

**CANNOT BE MODIFIED
BUDGET
RANGE
BY OURSELF**

DISCOUNTS

Qty	1+	4+	10+
Disc.	List	-5%	On request

Part number	Teeth		Z	mod	OD _n	OD _e	F	L	OD _m	Pilot bore not guaranteed		V	S	Lm	Stock*	Price each 1 to 3
	ØA**	ØA**														
FB1-15/ECO	15	1	15	17,8	9,3	17,2	13,3	4	20,8	-	7,7	-	19,77 €			
FB1-60/ECO	60	1	60	60,3	9,3	17,1	30,3	8	4,9	1,9	10	-	76,44 €			
FB1.5-16/ECO	16	1,5	24	26,91	12	25,0	18	10	36,02	1,0	12,2	✓	20,28 €			
FB1.5-64/ECO	64	1,5	96	96,73	12	22,0	70	15	8,53	3,0	10,0	✓	89,49 €			
FB2-16/ECO	16	2	32	35,88	15	24,0	25	12	49,07	1,0	8,2	✓	25,07 €			
FB2-64/ECO	64	2	128	128,97	15	24,0	80	20	11,79	4,0	10,0	✓	121,36 €			
FB2.5-16/ECO	16	2,5	40	44,85	18	30,5	30	12	61,99	1,5	11,7	-	38,27 €			
FB2.5-64/ECO	64	2,5	160	161,21	18	29,0	90	20	13,77	5,0	10,0	-	144,78 €			
FB3-16/ECO	16	3	48	53,82	22	34,0	40	15	74,05	2,0	11,0	-	46,72 €			
FB3-64/ECO	64	3	192	193,45	22	30,0	100	20	16,41	6,0	10,0	-	280,30 €			
FB3.5-16/ECO	16	3,5	56	62,80	25	45,0	48	15	87,13	2,0	19,1	-	54,42 €			
FB3.5-64/ECO	64	3,5	224	225,70	25	50,0	100	20	19,32	7,0	22,0	-	429,77 €			
FB4-16/ECO	16	4	64	71,76	30	50,0	50	20	98,21	2,0	18,5	-	63,85 €			
FB4-64/ECO	64	4	256	257,94	30	50,0	120	20	21,72	8,0	20,0	-	523,20 €			
FB4.5-16/ECO	16	4,5	72	80,73	32	53,0	55	20	112,08	2,5	19,0	-	70,54 €			
FB4.5-64/ECO	64	4,5	288	290,18	32	53,0	130	20	24,83	9,0	23,0	-	814,44 €			
FB5-16/ECO	16	5	80	89,70	35	58,0	60	20	125,06	2,5	20,6	-	80,10 €			
FB5-64/ECO	64	5	320	322,42	35	58,0	150	20	27,65	10,0	25,0	-	1 009,12 €			

*Depending on availability - Dimensions in mm

Our other products



BPF

Sheet steel flanged bearing for light loads, Sheet steel



BPHF

Ball transfer unit push fit, Heavy



SERB

Cam latch, Cam latch



BOXdh

Boxed set of cylindrical dowel pins DIN6325, Boxed set - Solid DIN 6...



CHINV

Invisible hinge, Invisible - Opening up to 90°



SH0

Parallel axis helical gear, Machined plastic (delrin)



PSG1

Spur gear - precision range, Pre-hardened Steel 35NCD6



ASH

Hoist ring for welding, for straight lifts - for welding



R206

Die spring ISO10243, Extra-heavy



BSP

Compact precision slide, from 156 N to 980 N



BCFH

Mushroom headed button Hygienic Usit®, With male



VTSM

Ball head screws Hygienic Design®, Stainless steel

Complementary products