

Economy range

KBww
KBSww

- Precise guiding accuracy
- Integrated seals
- Working temperature range -20°C to +80°C
- Material:


Housing: Steel or stainless steel

Ball raceway: Polyamide

info.

- Should be used with **Z-A** or **Z-B** hardened and ground shafts

Economy range

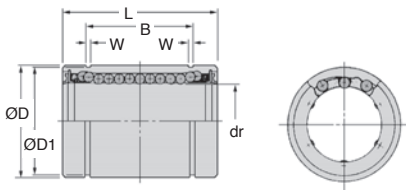

DISCOUNTS

Qty	1+	5+	10+	25+
Disc.	List	-6%	-30%	On request

Part number	dr	ØD	L	B	W	D1	Loads		Stock*	Price each 1 to 4
							Dynamic C (N)	Static Co (N)		
Steel with polyamide raceway										
KB-8-WW	8 ^{0/+0,008}	16 ^{0/-0,008}	25 ^{0/-0,2}	16,5 ^{0/+0,2}	1,10	15,2	265	402	✓	9,17 €
KB-12-WW	12 ^{0/+0,008}	22 ^{0/-0,009}	32 ^{0/-0,2}	22,9 ^{0/+0,2}	1,30	21,0	510	784	✓	10,70 €
KB-16-WW	16 ^{-0,001/+0,009}	26 ^{0/-0,009}	36 ^{0/-0,2}	24,9 ^{0/+0,2}	1,30	24,9	578	892	✓	12,09 €
KB-20-WW	20 ^{-0,001/+0,009}	32 ^{0/-0,011}	45 ^{0/-0,2}	31,5 ^{0/+0,2}	1,60	30,3	862	1370	✓	12,74 €
KB-25-WW	25 ^{-0,001/+0,011}	40 ^{0/-0,011}	58 ^{0/-0,3}	44,1 ^{0/+0,3}	1,85	37,5	980	1570	✓	22,29 €
KB-30-WW	30 ^{-0,001/+0,011}	47 ^{0/-0,011}	68 ^{0/-0,3}	52,1 ^{0/+0,3}	1,85	44,5	1570	2740	✓	25,77 €
KB-40-WW	40 ^{-0,002/+0,013}	62 ^{0/-0,013}	80 ^{0/-0,3}	60,6 ^{0/+0,3}	2,15	59,0	2160	4020	✓	44,19 €
Stainless steel with polyamide raceway										
KBS-12-WW	12 ^{0/-0,008}	22 ^{0/-0,009}	32 ^{0/-0,2}	22,9 ^{0/+0,2}	1,30	21,00	510	784	✓	29,16 €
KBS-16-WW	16 ^{-0,001/+0,009}	26 ^{0/-0,009}	36 ^{0/-0,2}	24,9 ^{0/+0,2}	1,30	24,90	578	892	✓	40,83 €
KBS-20-WW	20 ^{-0,001/+0,011}	32 ^{0/-0,011}	45 ^{0/-0,2}	31,5 ^{0/+0,2}	1,60	30,30	862	1370	✓	47,87 €
KBS-25-WW	25 ^{-0,001/+0,011}	40 ^{0/-0,011}	58 ^{0/-0,3}	44,1 ^{0/+0,3}	1,85	37,50	980	1570	✓	70,06 €
KBS-30-WW	30 ^{-0,001/+0,011}	47 ^{0/-0,011}	68 ^{0/-0,3}	52,1 ^{0/+0,3}	1,85	44,50	1570	2740	-	93,44 €
KBS-40-WW	40 ^{-0,002/+0,013}	62 ^{0/-0,013}	80 ^{0/-0,3}	60,6 ^{0/+0,3}	2,15	59,00	2160	4020	-	151,83 €

*Depending on availability - Dimensions in mm

Our other products



BLHB50

Right angled gearbox, bored shafts, up to 30 Nm



PW_PWG1

Worm - precision range, Stainless steel



UGPC

Actuator guide kit, Short bearing



CHAR16046

Spring hinge, screwed




QNUP

Single row cylindrical roller bearing, 1 fixed inner flange and 1 fr...



EFTC

Fixing support, Stainless steel



BFD

Locking pin for bush, +180°C



OP3_14_06

Reducing sleeve for OP indicators, Reduction socket



DB

Steel bevel gear, 2:1



BUH77

Motor-gearbox 12V and 24V DC, from 0.1 to 2 Nm



HLC28

Right angle spiro bevel gearbox, Up to 182Nm



PSG255

Spur gear - precision range, Stainless steel 303

Complementary products



ZA

Shaft for linear guides, Hardened ground steel



ZB

Shaft for linear guides, Hardened ground stainless steel



ZA

Shaft for linear guides, Hardened ground steel