

Economy range

KBww KBSww

- Precise guiding accuracy
- Integrated seals
- Working temperature range -20°C to +80°C
- Material:


Housing: Steel or stainless steel

Ball raceway: Polyamide

info.

- Should be used with Z-A or Z-B hardened and ground shafts

Economy range

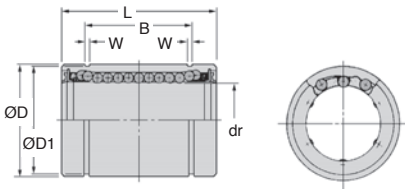

DISCOUNTS

Qty	1+	5+	10+	25+
Disc.	List	-6%	-30%	On request

Part number	dr	ØD	L	B	W	D1	Loads		Stock*	Price each 1 to 4
							Dynamic C (N)	Static Co (N)		
Steel with polyamide raceway										
KB-8-WW	8 ^{0/+0,008}	16 ^{0/-0,008}	25 ^{0/-0,2}	16,5 ^{0/+0,2}	1,10	15,2	265	402	✓	9,17 €
KB-12-WW	12 ^{0/+0,008}	22 ^{0/-0,009}	32 ^{0/-0,2}	22,9 ^{0/+0,2}	1,30	21,0	510	784	✓	10,70 €
KB-16-WW	16 ^{-0,001/+0,009}	26 ^{0/-0,009}	36 ^{0/-0,2}	24,9 ^{0/+0,2}	1,30	24,9	578	892	✓	12,09 €
KB-20-WW	20 ^{-0,001/+0,009}	32 ^{0/-0,011}	45 ^{0/-0,2}	31,5 ^{0/+0,2}	1,60	30,3	862	1370	✓	12,74 €
KB-25-WW	25 ^{-0,001/+0,011}	40 ^{0/-0,011}	58 ^{0/-0,3}	44,1 ^{0/+0,3}	1,85	37,5	980	1570	✓	22,29 €
KB-30-WW	30 ^{-0,001/+0,011}	47 ^{0/-0,011}	68 ^{0/-0,3}	52,1 ^{0/+0,3}	1,85	44,5	1570	2740	✓	25,77 €
KB-40-WW	40 ^{-0,002/+0,013}	62 ^{0/-0,013}	80 ^{0/-0,3}	60,6 ^{0/+0,3}	2,15	59,0	2160	4020	✓	44,19 €
Stainless steel with polyamide raceway										
KBS-12-WW	12 ^{0/-0,008}	22 ^{0/-0,009}	32 ^{0/-0,2}	22,9 ^{0/+0,2}	1,30	21,00	510	784	✓	29,16 €
KBS-16-WW	16 ^{-0,001/+0,009}	26 ^{0/-0,009}	36 ^{0/-0,2}	24,9 ^{0/+0,2}	1,30	24,90	578	892	✓	40,83 €
KBS-20-WW	20 ^{-0,001/+0,011}	32 ^{0/-0,011}	45 ^{0/-0,2}	31,5 ^{0/+0,2}	1,60	30,30	862	1370	✓	47,87 €
KBS-25-WW	25 ^{-0,001/+0,011}	40 ^{0/-0,011}	58 ^{0/-0,3}	44,1 ^{0/+0,3}	1,85	37,50	980	1570	✓	70,06 €
KBS-30-WW	30 ^{-0,001/+0,011}	47 ^{0/-0,011}	68 ^{0/-0,3}	52,1 ^{0/+0,3}	1,85	44,50	1570	2740	-	93,44 €
KBS-40-WW	40 ^{-0,002/+0,013}	62 ^{0/-0,013}	80 ^{0/-0,3}	60,6 ^{0/+0,3}	2,15	59,00	2160	4020	-	151,83 €

*Depending on availability - Dimensions in mm

Our other products




PDD
Actuating plunger,
Non-rotating detector
shaft



RBG
Wheel, Grey rubber -
Polypropylene rim




PSPE22
Conical flexible shaft
handlee Ø22, Black
PVC



PRF LIS
Door seal for
aluminium profile,
Black NBR



J66
Spur gear coaxial
gearbox, from 0.90 to
2.80 Nm - Inline



NK80
Drylin®N miniature
guiding system, Width
80mm



GARDLL
Mounting sleeve for
lock pin, Nickel-plated
steel or Stainless steel



M2
Worm and wheel set,
Unhardened steel



PSG08HC
Skive hobbed spur
gears - precision
range, Case hardened
steel 20NCD2



BLHB40
Right angled gearbox,
bored shafts, up to
10.3 Nm



RURt
Swivel castor with
central hole,
Polyurethane -
Aluminium rim (Free



CHM30-MOT
Asynchronous AC
motorgearboxes 0.09
to 0.22kW, 0.09 to
0.22kW

Complementary products



ZA
Shaft for linear
guides, Hardened
ground steel



ZB
Shaft for linear
guides, Hardened
ground stainless steel



ZA
Shaft for linear
guides, Hardened
ground steel