

Economy range

KBww
KBSww

- Precise guiding accuracy
- Integrated seals
- Working temperature range -20°C to +80°C
- Material:


Housing: Steel or stainless steel

Ball raceway: Polyamide

info.

- Should be used with **Z-A** or **Z-B** hardened and ground shafts

Economy range

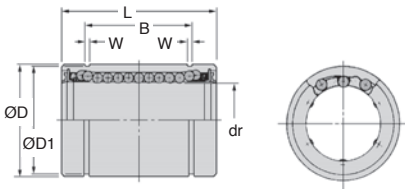

DISCOUNTS

Qty	1+	5+	10+	25+
Disc.	List	-6%	-30%	On request

Part number	dr	ØD	L	B	W	D1	Loads		Stock*	Price each 1 to 4
							Dynamic C (N)	Static Co (N)		
Steel with polyamide raceway										
KB-8-WW	8 ^{0/+0,008}	16 ^{0/-0,008}	25 ^{0/-0,2}	16,5 ^{0/+0,2}	1,10	15,2	265	402	✓	9,17 €
KB-12-WW	12 ^{0/+0,008}	22 ^{0/-0,009}	32 ^{0/-0,2}	22,9 ^{0/+0,2}	1,30	21,0	510	784	✓	10,70 €
KB-16-WW	16 ^{-0,001/+0,009}	26 ^{0/-0,009}	36 ^{0/-0,2}	24,9 ^{0/+0,2}	1,30	24,9	578	892	✓	12,09 €
KB-20-WW	20 ^{-0,001/+0,009}	32 ^{0/-0,011}	45 ^{0/-0,2}	31,5 ^{0/+0,2}	1,60	30,3	862	1370	✓	12,74 €
KB-25-WW	25 ^{-0,001/+0,011}	40 ^{0/-0,011}	58 ^{0/-0,3}	44,1 ^{0/+0,3}	1,85	37,5	980	1570	✓	22,29 €
KB-30-WW	30 ^{-0,001/+0,011}	47 ^{0/-0,011}	68 ^{0/-0,3}	52,1 ^{0/+0,3}	1,85	44,5	1570	2740	✓	25,77 €
KB-40-WW	40 ^{-0,002/+0,013}	62 ^{0/-0,013}	80 ^{0/-0,3}	60,6 ^{0/+0,3}	2,15	59,0	2160	4020	✓	44,19 €
Stainless steel with polyamide raceway										
KBS-12-WW	12 ^{0/+0,008}	22 ^{0/-0,009}	32 ^{0/-0,2}	22,9 ^{0/+0,2}	1,30	21,00	510	784	✓	29,16 €
KBS-16-WW	16 ^{-0,001/+0,009}	26 ^{0/-0,009}	36 ^{0/-0,2}	24,9 ^{0/+0,2}	1,30	24,90	578	892	✓	40,83 €
KBS-20-WW	20 ^{-0,001/+0,011}	32 ^{0/-0,011}	45 ^{0/-0,2}	31,5 ^{0/+0,2}	1,60	30,30	862	1370	✓	47,87 €
KBS-25-WW	25 ^{-0,001/+0,011}	40 ^{0/-0,011}	58 ^{0/-0,3}	44,1 ^{0/+0,3}	1,85	37,50	980	1570	✓	70,06 €
KBS-30-WW	30 ^{-0,001/+0,011}	47 ^{0/-0,011}	68 ^{0/-0,3}	52,1 ^{0/+0,3}	1,85	44,50	1570	2740	-	93,44 €
KBS-40-WW	40 ^{-0,002/+0,013}	62 ^{0/-0,013}	80 ^{0/-0,3}	60,6 ^{0/+0,3}	2,15	59,00	2160	4020	-	151,83 €

*Depending on availability - Dimensions in mm

Our other products



HLUT

Spoked handwheel with handle, Aluminium



PSG1

Spur gear - precision range, Case hardened steel 20NCD2



BHC

Socket head button screw, Stainless steel A2



SHN

Hexagonal nut DIN934, Steel (Class 6|8)



STC

Shock Absorber - stop collar, Universal flange



DOMI80

Connecting kits, XY linking kit



CLR

Straight clevis, Straight clevis for use with a male clevis



WSRM

Cylindrical polymer nut, Polymer (Iglidur®) - 1 thread



GARQT

Quarter turn lock pin for clamping, Quarter



S2B

Short linear bearing housing, Closed - Slim



OP3_14_06

Reducing sleeve for OP indicators,



CHAR5050_Z

Spring hinge, screwed

Complementary products



ZA

Shaft for linear guides, Hardened ground steel



ZB

Shaft for linear guides, Hardened ground stainless steel



ZA

Shaft for linear guides, Hardened ground steel