

Shackle with eye bolt




MDR

Pin diameters 5-20mm

- **Lifting shackle**
- Marked with pin diameter, SWL and CE mark
- Material:
Shackle: Steel Fe430B zinc treated

Info.

- SWL: SAFE WORKING LOAD.
The Safe Working Load is calculated by dividing the Breaking Strength by a factor of safety of 5.
- **Not sold individually, please contact us for details.**

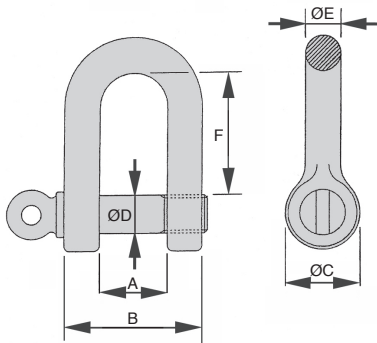

DISCOUNTS

Qty	1+	5+	10+	20+	30+	50+
Disc.	List	-5%	-10%	-15%	-20%	On request

Part number	Pin ØD	A	B	ØC	ØE	F	SWL (kg)	Weight (kg)	Stock*	Price each 1 to 4
MDR1-05	5	8	18	13	6	23	100	0,020	✓	2,04 €
MDR1-06	6	12	25	14	6	29	160	0,040	✓	2,45 €
MDR1-08	8	15	32	18	8	37	250	0,070	✓	2,98 €
MDR1-10	10	18	38	22	10	41	400	0,140	✓	3,76 €
MDR1-12	12	26	50	27	12	56	630	0,260	✓	5,94 €
MDR1-14	14	27	56	29	14	57	800	0,370	✓	7,28 €
MDR1-16	16	31	64	35	17	64	1000	0,560	✓	9,76 €
MDR1-18	18	32	70	36	19	65	1300	0,710	✓	13,50 €
MDR1-20	20	38	78	40	20	69	1600	0,940	✓	17,03 €

*Depending on availability - Dimensions in mm

HPC

WEB
04/2020

www.hpceurope.com

Tél: 0 825 88 5000 Service 0,15 €/min + prix appel

Our other products



Drylin R® linear bearing housing, Closed - Long



Eco. range steel bevel gear, 3:1



Offset spur gear reducer, from 59 to 210 Nm




Bellows cover, Accessory:



Domino rotary table, 40/1



Boxed set of spring pins ISO8752, Boxed set - Split ISO 8752




High helix leadscrew, Flanged nut - up to 40mm per rotation



Ball pin socket, Socket



Reducing sleeve female/female,



Internal gear, Machined plastic



Multifunction display, Articulated support



Decorative screwed hinge, Aluminium


Complementary products



Stainless steel Dee shackle with eye bolt, Stainless steel



Bow shackle with eye bolt, Steel



Galvanised steel cable, Galvanised steel



Rigging screw (hook/eye), Steel