




NK17 NW17


Loads up to 50N

- Linear rail with polymer slide
- Reduced size (both height and surface)
- Dry working, no maintenance required
- Not affected by dust
- Corrosion-resistant
- Reduced coefficient of friction means wear is reduced
- Reduced weight thanks to use of a combination of aluminium and plastic
- Very high speeds and acceleration possible
- Replaceable sliding parts in iglidur® J
- Materials:
 - Slide body: Plastic
 - Rails: Anodised aluminium
- Symmetrical hole pattern, C5=C6

Small but effective

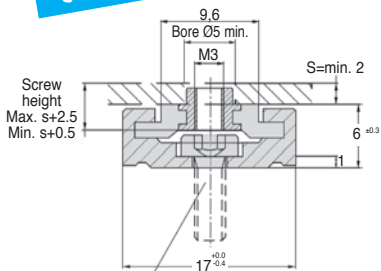

For M3 screw
DIN 7984 DIN
6912 DIN 84
EN ISO 1707

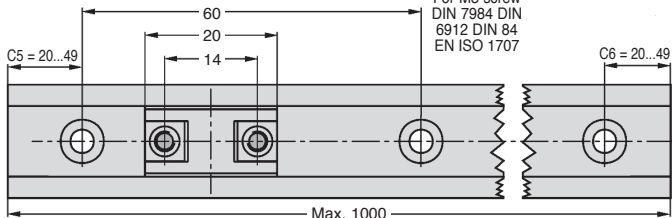

DISCOUNTS

Qty	1+	5+	10+
Disc.	List	-6%	On request

Part number	Type	Weight (g)	Stock*	Price each 1 to 4
NK02-17-1000	1 Rail (1000mm) + 1 slide	151,7	✓	47,80 €
NW02-17	1 slide only	1,7	✓	4,25 €

*Depending on availability - Dimensions in mm

Our other products



ASL
45° Hoist ring for welding, for 45° lifts - for welding



NDS14C
Angular connector, Universal angular connector



AC
Strike for toggle latch, 15mm



M1
Worm and wheel set, Non hardened steel



CABtool
Fitting cable tools, Cutting tools



CAP880
Side flexing slim slat top chain acetal, Narrow range 880



GLB
Small 6 lobe threaded handle - female, Technopolymer - Brass




DP
Dowel pin, Solid ISO 2338



H1
Crossed helical gear crossed axis at 90°



HRV
V- rail guidance Simple Select®



RPP
Connecting plate for RPP type timing belts,



PGT
Sliding profile, Sliding panel support

Complementary products



NSKB
Drylin® Rail end cap, Rail end cap