





## NK17 NW17


Loads up to 50N

- Linear rail with polymer slide
- Reduced size (both height and surface)
- Dry working, no maintenance required
- Not affected by dust
- Corrosion-resistant
- Reduced coefficient of friction means wear is reduced
- Reduced weight thanks to use of a combination of aluminium and plastic
- Very high speeds and acceleration possible
- Replaceable sliding parts in iglidur® J
- Materials:
  - Slide body: Plastic
  - Rails: Anodised aluminium
- Symmetrical hole pattern, C5=C6

**Small but effective**

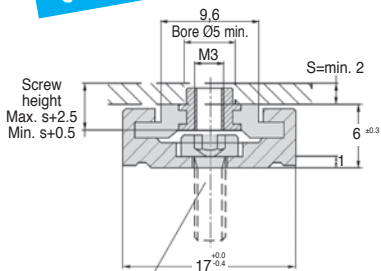

For M3 screw  
DIN 7984 DIN  
6912 DIN 84  
EN ISO 1707

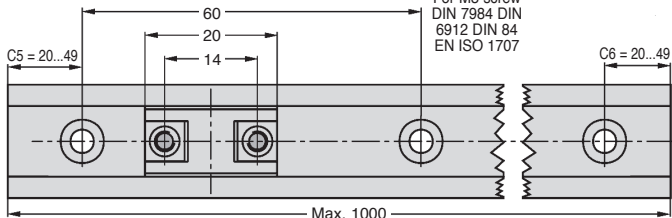

### DISCOUNTS

Qty	1+	5+	10+
Disc.	List	-6%	On request

Part number	Type	Weight (g)	Stock*	Price each 1 to 4
NK02-17-1000	1 Rail (1000mm) + 1 slide	151,7	✓	47,80 €
NW02-17	1 slide only	1,7	✓	4,25 €

\*Depending on availability - Dimensions in mm

## Our other products



EPRF

High helix leadscrew,  
Flanged nut - up to  
40mm per rotation



NDS20

Double cross clamp,  
Crossed



BAGSS

Stainless steel  
Clamping collar,  
Stainless steel



PRF-GPA

Guide for aluminium  
profile, Parallel rails



RGS

Rotex® GS backlash  
free jaw coupling,  
from 0.5 to 190Nm



EML

Stainless steel  
hexagonal headed  
thumb nut, Lobed  
handscrew



RTE

Rotex®, jaw coupling,  
cast iron



AT10-BAR

AT type tooth bar  
stock, AT10



TBD

Manual leadscrew  
table with opposing



PTKss

Foot for the food  
industry, Stainless



SH1

Parallel axis helical  
gear, Machined plastic



MPS

Hexagonal spacer,  
Stainless steel 303

## Complementary products



NSKB

Drylin® Rail end cap,  
Rail end cap