

Square base plate



PMC

- With 4 fixing holes

- Maximum loads are given for a permanent, static vertical load
- Materials:
 - Centre: Natural rubber (60 Shore A)
 - Support: steel

Uses

- Anti vibration mounting for machines and all types of motors
- Active effective protection for personnel and surroundings from harmful effects of vibrations
- Passive protection of sensitive machines, measuring instruments, equipment and many different types of machines against shocks and vibration.

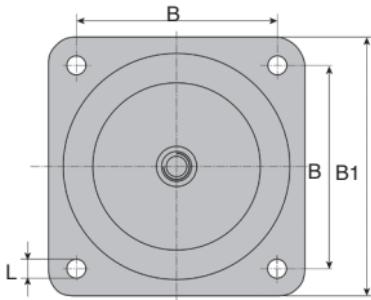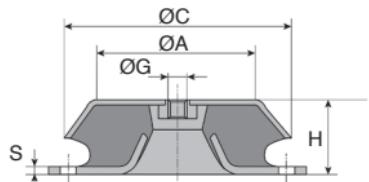

DISCOUNTS

Qty	1+	6+	10+	20+
Disc.	List	-5%	-10%	On request

Part number	ØC	H	ØA	ØG	S	L	B	B1	Max. load (N)	Stock*	Price each 1 to 5
PMC150-M16	150	51,5	110	M16	4,0	12,5	132	168	7800	✓	49,65 €
PMC177-M20	177	63,0	125	M20	4,5	13,0	150	184	16500	-	72,48 €

*Depending on availability - Dimensions in mm

Our other products




SSG1_304L
Stainless steel spur gear, Stainless steel 304L



RPP
RPP heavy duty timing belt, RPP8



PO
Pull handle - Multi-sector, Smooth hole



BPF
Sheet steel flanged bearing for light loads, Sheet steel



HLA28
Right angle spiro bevel gearbox, Up to 182Nm



VDS
Sliding lock adjustment system, Sliding lock for oblong hole



MCLred
Reducing sleeve female/female, Cylindrical - stainless steel



HK
Manual locking clamp, Manual locking clamp LWH



SHN
Hexagonal nut DIN934, A2 Stainless steel



G4-ECO
Eco range Spur gear, Steel C45



PRF_CH
Cable-carrier chain for aluminium profile, Supplied in metre



EHD08-3
Internal epicyclic servo reducers, from 20 to 50 Nm

Complementary products



PMC48_M8
Anti-vibration machine mount, Oval base plate



PCF4
Conical flexible mount, Square base plate