

# Fixable articulated foot Ø40 and Ø50 **Ste****Sta****Stock**

## PR40 PR50

Accepts loads up to 11,000N

- Levelling foot
- Rubber anti-slip sole (NBR 70 Shore)
- Black glass fibre reinforced Polyamide base
- Threaded ball ended spindle in plated steel or stainless steel
- Nut not supplied

With non-slip sole


Steel or stainless steel spindle

### Advantages

- Self aligning on floor due to use of ball ended rod
- Flexible and non-slip sole

### Info.

- If subjected to vibration, the static load given will be reduced

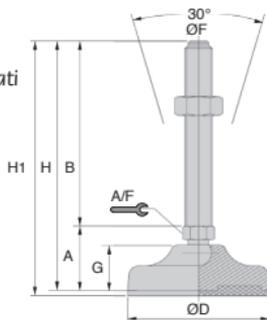

### DISCOUNTS

|       |      |      |            |
|-------|------|------|------------|
| Qty   | 1+   | 20+  | 50+        |
| Disc. | List | -10% | On request |

| Part number                    | ØD | Thread ØF | B   | A  | A/F | G    | H   | H1  | Static load (N) | Price each 1 to 19 |
|--------------------------------|----|-----------|-----|----|-----|------|-----|-----|-----------------|--------------------|
| <b>Steel spindle</b>           |    |           |     |    |     |      |     |     |                 |                    |
| PR40-6-25                      | 40 | M6        | 25  | 27 | 12  | 16,5 | 52  | 55  | 5000            | - 5,68 €           |
| PR40-6-50                      | 40 | M6        | 50  | 27 | 12  | 16,5 | 77  | 80  | 5000            | - 5,68 €           |
| PR40-8-50                      | 40 | M8        | 50  | 27 | 12  | 16,5 | 77  | 80  | 10000           | ✓ 6,31 €           |
| PR40-8-100                     | 40 | M8        | 100 | 27 | 12  | 16,5 | 127 | 130 | 10000           | ✓ 8,74 €           |
| PR50-10-75                     | 50 | M10       | 75  | 30 | 14  | 20,0 | 105 | 108 | 11000           | ✓ 8,51 €           |
| PR50-10-125                    | 50 | M10       | 125 | 30 | 14  | 20,0 | 155 | 158 | 11000           | ✓ 10,15 €          |
| PR50-12-75                     | 50 | M12       | 75  | 30 | 14  | 20,0 | 105 | 108 | 11000           | ✓ 9,34 €           |
| PR50-12-125                    | 50 | M12       | 125 | 30 | 14  | 20,0 | 155 | 158 | 11000           | ✓ 10,43 €          |
| PR50-16-75                     | 50 | M16       | 75  | 30 | 16  | 20,0 | 105 | 108 | 11000           | - 10,54 €          |
| PR50-16-125                    | 50 | M16       | 125 | 30 | 16  | 20,0 | 155 | 158 | 11000           | - 11,81 €          |
| <b>Stainless steel spindle</b> |    |           |     |    |     |      |     |     |                 |                    |
| PR40-6-25/SS                   | 40 | M6        | 25  | 27 | 12  | 16,5 | 52  | 55  | 5000            | - 8,56 €           |
| PR40-6-50/SS                   | 40 | M6        | 50  | 27 | 12  | 16,5 | 77  | 80  | 5000            | - 10,82 €          |
| PR40-8-50/SS                   | 40 | M8        | 50  | 27 | 12  | 16,5 | 77  | 80  | 10000           | ✓ 11,83 €          |
| PR40-8-100/SS                  | 40 | M8        | 100 | 27 | 12  | 16,5 | 127 | 130 | 10000           | ✓ 16,86 €          |
| PR50-10-75/SS                  | 50 | M10       | 75  | 30 | 14  | 20,0 | 105 | 108 | 11000           | ✓ 15,76 €          |
| PR50-10-125/SS                 | 50 | M10       | 125 | 30 | 14  | 20,0 | 155 | 158 | 11000           | ✓ 19,40 €          |
| PR50-12-75/SS                  | 50 | M12       | 75  | 30 | 14  | 20,0 | 105 | 108 | 11000           | ✓ 14,51 €          |
| PR50-12-125/SS                 | 50 | M12       | 125 | 30 | 14  | 20,0 | 155 | 158 | 11000           | ✓ 17,73 €          |
| PR50-16-75/SS                  | 50 | M16       | 75  | 30 | 16  | 20,0 | 105 | 108 | 11000           | - 16,07 €          |
| PR50-16-125/SS                 | 50 | M16       | 125 | 30 | 16  | 20,0 | 155 | 158 | 11000           | - 18,91 €          |


\*Depending on availability- Dimensions in mm

**Swivel levelling foot with protective collar**

- Up to +/-8° from vertical
- Non slip base in NBR rubber 70 shore
- Base: Blue polyamide (RAL5005) fiber glass reinforced
- Spindle: Stainless steel 304

**Advantages**

- Articulated rod allows auto-alignment with the ground
- Sole material ensures flexibility and grip
- The collar at the base of the stem limits (but does not prevent) the retention of material

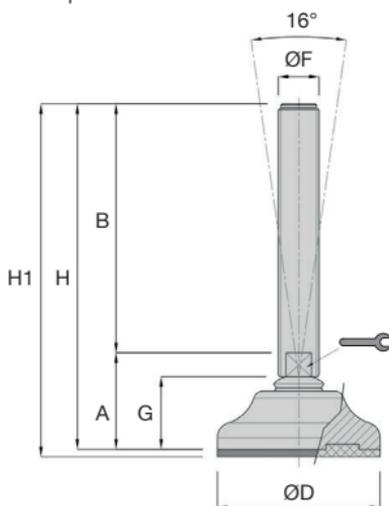**DISCOUNTS**

|            |      |            |     |
|------------|------|------------|-----|
| Qty        | 1+   | 20+        | 50+ |
| Disc. List | -10% | On request |     |

| Part number     | ØD | Thread | B   | A  | A/F | G  | H   | H1  | Static load (N) | Price each 1 to 19 |
|-----------------|----|--------|-----|----|-----|----|-----|-----|-----------------|--------------------|
| PR65C-12-50/SS  | 65 | M12    | 50  | 39 | 10  | 29 | 89  | 92  | 13000           | 12,45 €            |
| PR65C-12-100/SS | 65 | M12    | 100 | 39 | 10  | 29 | 139 | 142 | 13000           | 13,53 €            |
| PR65C-12-150/SS | 65 | M12    | 150 | 39 | 10  | 29 | 189 | 192 | 13000           | 15,22 €            |
| PR65C-16-100/SS | 65 | M16    | 100 | 39 | 13  | 29 | 139 | 142 | 18000           | 15,71 €            |
| PR65C-16-150/SS | 65 | M16    | 150 | 39 | 13  | 29 | 189 | 192 | 18000           | 18,45 €            |
| PR65C-16-200/SS | 65 | M16    | 200 | 39 | 13  | 29 | 239 | 242 | 18000           | 20,36 €            |
| PR65C-20-100/SS | 65 | M20    | 100 | 41 | 17  | 29 | 141 | 144 | 18000           | 20,36 €            |
| PR65C-20-150/SS | 65 | M20    | 150 | 41 | 17  | 29 | 191 | 194 | 18000           | 23,59 €            |
| PR65C-20-200/SS | 65 | M20    | 200 | 41 | 17  | 29 | 241 | 244 | 18000           | 26,88 €            |
| PR65C-20-250/SS | 65 | M20    | 250 | 41 | 17  | 29 | 291 | 294 | 18000           | 30,62 €            |

Dimensions in mm

# Fixable articulated foot Ø83

Stock Ste Sta

## PR85

## Maximum load 20,000N

- **Levelling foot**
- Non slip base
- **Materials:**
  - Base: Black glass reinforced polyamide (Shore 70)
  - Spindle: Zinc plated steel or stainless 304 steel
- Supplied without nut



### Advantages

- Articulated rod allows auto-alignment with the ground
- Sole material ensures flexibility and grip

### Info.

- Values given for static, should will be reduced in case of a vibrating load

With non-slip base



### DISCOUNTS

|       |           |            |     |
|-------|-----------|------------|-----|
| Qty   | 1+        | 20+        | 50+ |
| Disc. | List -10% | On request |     |

| Part number | ØD | Thread ØF | B | A | A/F | G | H | H1 | Static load (N) | Type | Stock | Price each 1 to 19 |
|-------------|----|-----------|---|---|-----|---|---|----|-----------------|------|-------|--------------------|
|             |    |           |   |   |     |   |   |    |                 |      | ✓     |                    |

#### Steel spindle

|             |    |     |     |    |    |    |     |     |       |   |   |         |
|-------------|----|-----|-----|----|----|----|-----|-----|-------|---|---|---------|
| PR85-12-75  | 83 | M12 | 75  | 38 | 14 | 27 | 113 | 116 | 15000 | H | ✓ | 11,45 € |
| PR85-12-125 | 83 | M12 | 125 | 38 | 14 | 27 | 163 | 166 | 15000 | H | ✓ | 12,79 € |
| PR85-16-75  | 83 | M16 | 75  | 38 | 16 | 27 | 113 | 116 | 20000 | H | ✓ | 12,04 € |
| PR85-16-150 | 83 | M16 | 150 | 38 | 16 | 27 | 188 | 191 | 20000 | H | ✓ | 14,16 € |
| PR85-16-200 | 83 | M16 | 200 | 38 | 16 | 27 | 238 | 241 | 20000 | H | ✓ | 15,59 € |
| PR85-20-125 | 83 | M20 | 125 | 41 | 17 | 27 | 166 | 169 | 20000 | M | ✓ | 13,11 € |
| PR85-20-175 | 83 | M20 | 175 | 41 | 17 | 27 | 216 | 219 | 20000 | M | ✓ | 14,98 € |
| PR85-20-225 | 83 | M20 | 225 | 41 | 17 | 27 | 266 | 269 | 20000 | M | ✓ | 17,02 € |

#### Stainless steel spindle

|                |    |     |     |    |    |    |     |     |       |   |   |         |
|----------------|----|-----|-----|----|----|----|-----|-----|-------|---|---|---------|
| PR85-12-75/SS  | 83 | M12 | 75  | 38 | 14 | 27 | 113 | 116 | 15000 | H | ✓ | 19,44 € |
| PR85-12-125/SS | 83 | M12 | 125 | 38 | 14 | 27 | 163 | 166 | 15000 | H | ✓ | 22,37 € |
| PR85-16-75/SS  | 83 | M16 | 75  | 41 | 13 | 27 | 116 | 119 | 20000 | M | ✓ | 19,44 € |
| PR85-16-150/SS | 83 | M16 | 150 | 41 | 13 | 27 | 191 | 194 | 20000 | M | ✓ | 23,84 € |
| PR85-16-200/SS | 83 | M16 | 200 | 41 | 13 | 27 | 241 | 244 | 20000 | M | ✓ | 26,79 € |
| PR85-20-125/SS | 83 | M20 | 125 | 41 | 17 | 27 | 166 | 169 | 20000 | M | ✓ | 27,25 € |
| PR85-20-175/SS | 83 | M20 | 175 | 41 | 17 | 27 | 216 | 219 | 20000 | M | ✓ | 32,10 € |
| PR85-20-225/SS | 83 | M20 | 225 | 41 | 17 | 27 | 266 | 269 | 20000 | M | ✓ | 38,79 € |


\*Depending on availability - Dimensions in mm

- **Levelling foot**
- Non slip base
- **Materials:**
  - Base: Black glass reinforced polyamide (Shore 70)
  - Spindle: Zinc plated steel or stainless 304 (nut not supplied)

### Info.

- Values given for static loads will be reduced in case of a vibrating load

With non-slip base



### DISCOUNTS

|       |           |            |     |
|-------|-----------|------------|-----|
| Qty   | 1+        | 20+        | 50+ |
| Disc. | List -10% | On request |     |

| Part number                    | ØD  | Thread ØF | B   | A  | A/F | G  | H   | H1  | Static load (N) | Price each | Stock*  |
|--------------------------------|-----|-----------|-----|----|-----|----|-----|-----|-----------------|------------|---------|
| <b>Steel spindle</b>           |     |           |     |    |     |    |     |     |                 |            |         |
| PR105-16-75                    | 103 | M16       | 75  | 51 | 20  | 32 | 126 | 129 | 25000           | ✓          | 19,19 € |
| PR105-16-150                   | 103 | M16       | 150 | 51 | 20  | 32 | 201 | 204 | 25000           | ✓          | 23,08 € |
| PR105-16-225                   | 103 | M16       | 225 | 51 | 20  | 32 | 276 | 279 | 25000           | ✓          | 28,44 € |
| PR105-20-125                   | 103 | M20       | 125 | 51 | 20  | 32 | 176 | 179 | 25000           | ✓          | 19,44 € |
| PR105-20-200                   | 103 | M20       | 200 | 51 | 20  | 32 | 251 | 254 | 25000           | ✓          | 23,06 € |
| PR105-20-250                   | 103 | M20       | 250 | 51 | 20  | 32 | 301 | 304 | 25000           | ✓          | 28,44 € |
| PR105-24-125                   | 103 | M24       | 125 | 51 | 20  | 32 | 176 | 179 | 25000           | ✓          | 19,44 € |
| PR105-24-200                   | 103 | M24       | 200 | 51 | 20  | 32 | 251 | 254 | 25000           | ✓          | 23,06 € |
| PR105-24-250                   | 103 | M24       | 250 | 51 | 20  | 32 | 301 | 304 | 25000           | -          | 28,44 € |
| <b>Stainless steel spindle</b> |     |           |     |    |     |    |     |     |                 |            |         |
| PR105-16-75/SS                 | 103 | M16       | 75  | 51 | 20  | 32 | 126 | 129 | 25000           | ✓          | 34,11 € |
| PR105-16-150/SS                | 103 | M16       | 150 | 51 | 20  | 32 | 201 | 204 | 25000           | ✓          | 45,13 € |
| PR105-16-225/SS                | 103 | M16       | 225 | 51 | 20  | 32 | 276 | 279 | 25000           | ✓          | 58,08 € |
| PR105-20-125/SS                | 103 | M20       | 125 | 51 | 20  | 32 | 176 | 179 | 25000           | -          | 39,45 € |
| PR105-20-200/SS                | 103 | M20       | 200 | 51 | 20  | 32 | 251 | 254 | 25000           | -          | 54,17 € |
| PR105-20-250/SS                | 103 | M20       | 250 | 51 | 20  | 32 | 301 | 304 | 25000           | ✓          | 62,89 € |
| PR105-24-125/SS                | 103 | M24       | 125 | 51 | 20  | 32 | 175 | 178 | 25000           | -          | 39,45 € |
| PR105-24-200/SS                | 103 | M24       | 200 | 51 | 20  | 32 | 250 | 253 | 25000           | -          | 54,17 € |
| PR105-24-250/SS                | 103 | M24       | 250 | 51 | 20  | 32 | 300 | 303 | 25000           | -          | 62,89 € |

\*Depending on availability - Dimensions in mm

# Fixable articulated foot Ø123

Stock Ste Sta


## PR125

## Maximum load 35,000N

- Levelling foot
- Non slip base
- Materials:  
Base: Black glass reinforced polyamide (Shore 70)  
Spindle: Zinc plated steel or stainless steel 304  
(nut not supplied)

With non-slip base

Steel or stainless steel spindle



### Advantages

- Articulated rod allows auto-alignment with the ground
- Sole material ensures flexibility and grip

### Accessories

- Extension for articulated foot PR125-ENT (p.27)

### Info.

- Values given for static loads will be reduced in case of a vibrating load

### DISCOUNTS

| Qty   | 1+        | 20+        | 50+ |
|-------|-----------|------------|-----|
| Disc. | List -10% | On request |     |

| Part number                    | ØD  | Thread | B   | A  | A/F | G  | H   | H1  | Static load (N) | Price each |         |
|--------------------------------|-----|--------|-----|----|-----|----|-----|-----|-----------------|------------|---------|
|                                |     |        |     |    |     |    |     |     |                 | Stock*     | 1 to 19 |
| <b>Steel spindle</b>           |     |        |     |    |     |    |     |     |                 |            |         |
| PR125-16-75                    | 123 | M16    | 75  | 57 | 20  | 37 | 132 | 133 | 35000           | ✓          | 22,33 € |
| PR125-16-150                   | 123 | M16    | 150 | 57 | 20  | 37 | 207 | 208 | 35000           | ✓          | 26,26 € |
| PR125-16-225                   | 123 | M16    | 225 | 57 | 20  | 37 | 282 | 285 | 35000           | ✓          | 30,70 € |
| PR125-20-125                   | 123 | M20    | 125 | 57 | 20  | 37 | 182 | 185 | 35000           | ✓          | 22,20 € |
| PR125-20-200                   | 123 | M20    | 200 | 57 | 20  | 37 | 257 | 260 | 35000           | ✓          | 25,93 € |
| PR125-20-250                   | 123 | M20    | 250 | 57 | 20  | 37 | 307 | 310 | 35000           | ✓          | 30,47 € |
| PR125-24-125                   | 123 | M24    | 125 | 57 | 20  | 37 | 182 | 185 | 35000           | ✓          | 22,20 € |
| PR125-24-200                   | 123 | M24    | 200 | 57 | 20  | 37 | 257 | 260 | 35000           | ✓          | 25,93 € |
| PR125-24-250                   | 123 | M24    | 250 | 57 | 20  | 37 | 307 | 310 | 35000           | ✓          | 30,47 € |
| PR125-30-125                   | 123 | M30    | 125 | 58 | 26  | 37 | 183 | 186 | 35000           | ✓          | 23,86 € |
| PR125-30-200                   | 123 | M30    | 200 | 58 | 26  | 37 | 258 | 261 | 35000           | ✓          | 28,53 € |
| PR125-30-250                   | 123 | M30    | 250 | 58 | 26  | 37 | 308 | 311 | 35000           | -          | 31,75 € |
| <b>Stainless steel spindle</b> |     |        |     |    |     |    |     |     |                 |            |         |
| PR125-16-75/SS                 | 123 | M16    | 75  | 57 | 20  | 37 | 132 | 135 | 35000           | -          | 38,49 € |
| PR125-16-150/SS                | 123 | M16    | 150 | 57 | 20  | 37 | 207 | 210 | 35000           | ✓          | 49,45 € |
| PR125-16-225/SS                | 123 | M16    | 225 | 57 | 20  | 37 | 282 | 285 | 35000           | -          | 62,44 € |
| PR125-20-125/SS                | 123 | M20    | 125 | 57 | 20  | 37 | 182 | 185 | 35000           | ✓          | 45,81 € |
| PR125-20-200/SS                | 123 | M20    | 200 | 57 | 20  | 37 | 257 | 260 | 35000           | -          | 58,54 € |
| PR125-20-250/SS                | 123 | M20    | 250 | 57 | 20  | 37 | 307 | 310 | 35000           | -          | 67,30 € |
| PR125-24-125/SS                | 123 | M24    | 125 | 57 | 20  | 37 | 182 | 185 | 35000           | -          | 45,81 € |
| PR125-24-200/SS                | 123 | M24    | 200 | 57 | 20  | 37 | 257 | 260 | 35000           | -          | 52,21 € |
| PR125-24-250/SS                | 123 | M24    | 250 | 57 | 20  | 37 | 307 | 310 | 35000           | -          | 67,30 € |
| PR125-30-125/SS                | 123 | M30    | 125 | 58 | 26  | 37 | 183 | 186 | 35000           | -          | 51,98 € |
| PR125-30-200/SS                | 123 | M30    | 200 | 58 | 26  | 37 | 258 | 261 | 35000           | -          | 66,37 € |
| PR125-30-250/SS                | 123 | M30    | 250 | 58 | 26  | 37 | 308 | 311 | 35000           | -          | 75,63 € |

\*Depending on availability - Dimensions in mm

# Extension for articulated foot Ø123

For articulated foot PR125

PR125

## Extension with mounting holes for articulated feet PR125


- Material  
Polyamide
- Delivered without anti-slip rubber pad
- Suitable for any type of floor

### Advantages


- Easily compensates for large differences in floor level



**Assembly example**  
(screws not included)

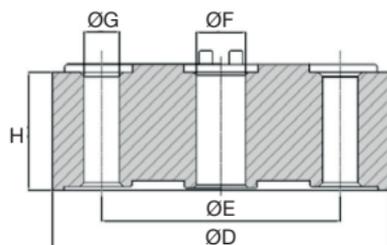

### Application example

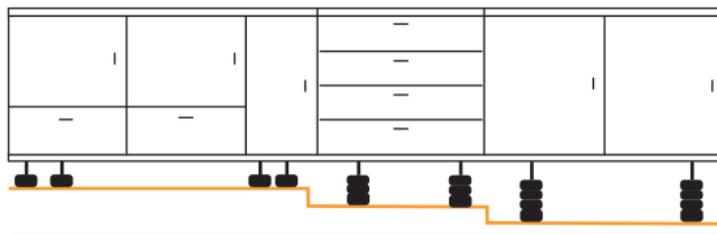

### DISCOUNTS

|       |      |      |            |
|-------|------|------|------------|
| Qty   | 1+   | 20+  | 50+        |
| Disc. | List | -10% | On request |

| Part number | ØD  | ØE | H  | ØG | ØF | Static load (N) | Price each 1 to 19 |
|-------------|-----|----|----|----|----|-----------------|--------------------|
| PR125-ENT   | 123 | 87 | 43 | 13 | 18 | 35000           | 13,71 €            |

Dimensions in mm