

# Fastener for aluminium profile

Stock


## PRF **MiniTec**

### Standard fastener

#### FIXSTD

#### Profile assembly

- Suitable for loads up to 18000N
- Can be used to securely join all profile types
- Forms very efficient anti-twist joint
- Materials:
  - M8x50mm CHC screw: electroplated steel
  - Locking plate: electroplated steel


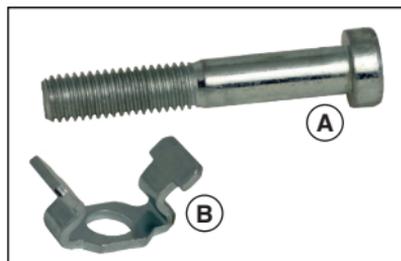


#### Applications

- For heavy or vibrating loads

#### Assembly

- Drill a stepped hole ( $\varnothing 9$ ,  $\varnothing 15$ ) at the required position ①
- Slide the screw locking plate in the slot
- Pass the end of the screw through the first profile ①, the locking plate and then into the central hole of the second profile ② which was previously tapped (M8 x 25mm) and tighten.

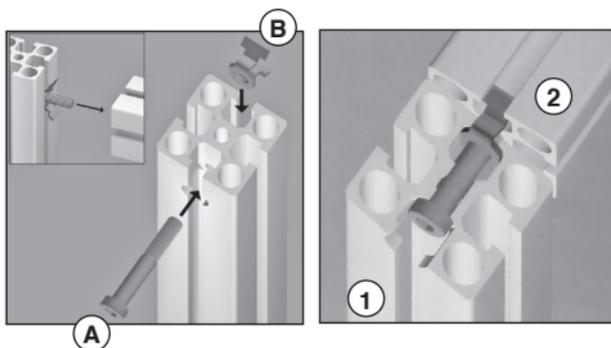

#### DISCOUNTS

Qty	1+	50+	100+
Disc.	List	-5%	On request

Part number	Load (N)	For profile	Tightening torque (Nm)	Weight (kg)	Stock*	Price each 1 to 49
PRF-FIX-STD	18000	All types of PRF profile	20	0,03	✓	2,94 €

\*Depending on availability - Dimensions in mm