

Stainless steel articulated foot Ø50 Sta Stock

PRS50

Maximum load 15.000N


- Solid levelling support
- With non-slip base
- Materials:
 - Base: stainless steel AISI 304
 - Threaded rod: stainless steel AISI 304 (nut not supplied)
 - Sole: NBR rubber (Shore hardness 70)

stainless steel



Advantages

- Articulated rod allows auto-alignment with the ground
- Sole material ensures flexibility and grip

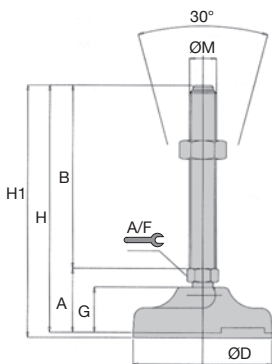

DISCOUNTS

Qty	1+	6+	10+	15+
Disc.	List	-5%	-10%	On request

Part number	ØM	A	B	ØD	A/F	G	H	H1	Max. load (N)	Stock*	Price each 1 to 5
PRS50-10-50	M10	28	50	50	14	16	78	81	15000	✓	37,51 €
PRS50-10-75	M10	28	75	50	14	16	103	106	15000	✓	39,98 €
PRS50-10-100	M10	28	100	50	14	16	128	131	15000	✓	42,31 €
PRS50-10-125	M10	28	125	50	14	16	153	156	15000	✓	44,61 €
PRS50-12-50	M12	28	50	50	14	16	78	81	15000	✓	37,51 €
PRS50-12-75	M12	28	75	50	14	16	103	106	15000	✓	39,98 €
PRS50-12-100	M12	28	100	50	14	16	128	131	15000	✓	42,31 €
PRS50-12-125	M12	28	125	50	14	16	153	156	15000	✓	44,61 €
PRS50-14-50	M14	28	50	50	14	16	78	81	15000	✓	37,51 €
PRS50-14-75	M14	28	75	50	14	16	103	106	15000	✓	39,98 €
PRS50-14-100	M14	28	100	50	14	16	128	131	15000	✓	42,31 €
PRS50-14-125	M14	28	125	50	14	16	153	156	15000	✓	44,61 €

*Depending on availability - Dimensions in mm

Our other products



HRV

V- rail guidance
Simple Select®
system, Rail with
carriage



TPEpbd

Castor for aluminium
profile, Swivel with
brake



SVG

Adjustable latch
clamp with strike
plate, Stroke from
118mm to 130,5mm



HTD8M_50

HTD Heavy duty
timing pulley, HTD8
Cast



BPM

Slotted spring plunger
with ball tip, Steel



F7-SN

Multifunction display,
Articulated support



M1

Worm and wheel set,
Bronze



DH

Dowel pin, Solid DIN
6325




PDD

Spring plunger, With
sensor adaptor



PR40

Articulated foot Ø50,
Ø 50



UCF_PBT

Stainless
steel/Polymer flanged



EMS

Stainless steel knurled
thumb nut, Knurled

Complementary products



PRS30

Stainless steel
articulated foot Ø30,
Ø 30