

Stainless steel articulated foot Ø50 Sta Stock

PRS50

Maximum load 15.000N


- Solid levelling support
- With non-slip base
- Materials:
 - Base: stainless steel AISI 304
 - Threaded rod: stainless steel AISI 304 (nut not supplied)
 - Sole: NBR rubber (Shore hardness 70)

stainless steel



Advantages

- Articulated rod allows auto-alignment with the ground
- Sole material ensures flexibility and grip

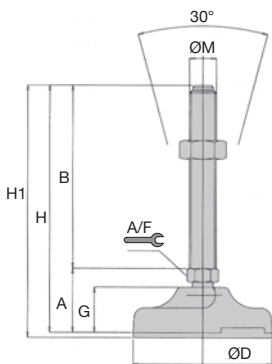

DISCOUNTS

| Qty | 1+ | 6+ | 10+ | 15+ |
|-------|------|-----|------|------------|
| Disc. | List | -5% | -10% | On request |

| Part number | ØM | A | B | ØD | A/F | G | H | H1 | Max. load (N) | Stock* | Price each 1 to 5 |
|--------------|-----|----|-----|----|-----|----|-----|-----|---------------|--------|-------------------|
| PRS50-10-50 | M10 | 28 | 50 | 50 | 14 | 16 | 78 | 81 | 15000 | ✓ | 37,51 € |
| PRS50-10-75 | M10 | 28 | 75 | 50 | 14 | 16 | 103 | 106 | 15000 | ✓ | 39,98 € |
| PRS50-10-100 | M10 | 28 | 100 | 50 | 14 | 16 | 128 | 131 | 15000 | ✓ | 42,31 € |
| PRS50-10-125 | M10 | 28 | 125 | 50 | 14 | 16 | 153 | 156 | 15000 | ✓ | 44,61 € |
| PRS50-12-50 | M12 | 28 | 50 | 50 | 14 | 16 | 78 | 81 | 15000 | ✓ | 37,51 € |
| PRS50-12-75 | M12 | 28 | 75 | 50 | 14 | 16 | 103 | 106 | 15000 | ✓ | 39,98 € |
| PRS50-12-100 | M12 | 28 | 100 | 50 | 14 | 16 | 128 | 131 | 15000 | ✓ | 42,31 € |
| PRS50-12-125 | M12 | 28 | 125 | 50 | 14 | 16 | 153 | 156 | 15000 | ✓ | 44,61 € |
| PRS50-14-50 | M14 | 28 | 50 | 50 | 14 | 16 | 78 | 81 | 15000 | ✓ | 37,51 € |
| PRS50-14-75 | M14 | 28 | 75 | 50 | 14 | 16 | 103 | 106 | 15000 | ✓ | 39,98 € |
| PRS50-14-100 | M14 | 28 | 100 | 50 | 14 | 16 | 128 | 131 | 15000 | ✓ | 42,31 € |
| PRS50-14-125 | M14 | 28 | 125 | 50 | 14 | 16 | 153 | 156 | 15000 | ✓ | 44,61 € |

*Depending on availability - Dimensions in mm

Our other products



PTRSS
Idler chain sprocket,
For hostile
environments



HLUss
Spoked handwheel,
Stainless steel 316



OP3_14_06
Reducing sleeve for
OP indicators,
Reduction socket



VQT
Quarter-turn clamp
lock, Plastic or
stainless steel button



SSDB
Stainless steel bevel
gear, 2:1



CHB
Worm and wheel gear
reducer, up to 73 Nm




BLHM20
Right angled gearbox,
double output shafts,
up to 1.77 Nm



ZHGS
Plastic spur gear,
Machined plastic
(delrin)



PF45
Worm and wheel gear
reducer, up to 40 Nm



KS
Keysteel, Steel -
Keystock



DILC
Indexing plunger with
cam, with cam



GE_ES_2RS
Spherical bushing,
Steel / steel with seals

Complementary products



PRS30
Stainless steel
articulated foot Ø30,
Ø 30



PRS80
Stainless steel
articulated foot Ø80,
Ø 80



PRS100
Stainless steel
articulated foot Ø100,
Ø 100