

# Stainless steel articulated foot Ø50 Sta Stock

## PRS50

## Maximum load 15.000N


- Solid levelling support
- With non-slip base
- Materials:
  - Base: stainless steel AISI 304
  - Threaded rod: stainless steel AISI 304 (nut not supplied)
  - Sole: NBR rubber (Shore hardness 70)

stainless steel



### Advantages

- Articulated rod allows auto-alignment with the ground
- Sole material ensures flexibility and grip

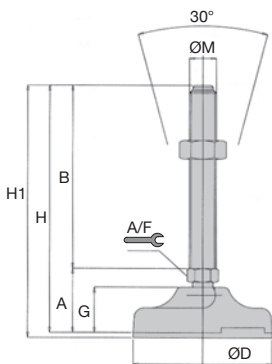

### DISCOUNTS

Qty	1+	6+	10+	15+
Disc.	List	-5%	-10%	On request

Part number	ØM	A	B	ØD	A/F	G	H	H1	Max. load (N)	Stock*	Price each 1 to 5
PRS50-10-50	M10	28	50	50	14	16	78	81	15000	✓	37,51 €
PRS50-10-75	M10	28	75	50	14	16	103	106	15000	✓	39,98 €
PRS50-10-100	M10	28	100	50	14	16	128	131	15000	✓	42,31 €
PRS50-10-125	M10	28	125	50	14	16	153	156	15000	✓	44,61 €
PRS50-12-50	M12	28	50	50	14	16	78	81	15000	✓	37,51 €
PRS50-12-75	M12	28	75	50	14	16	103	106	15000	✓	39,98 €
PRS50-12-100	M12	28	100	50	14	16	128	131	15000	✓	42,31 €
PRS50-12-125	M12	28	125	50	14	16	153	156	15000	✓	44,61 €
PRS50-14-50	M14	28	50	50	14	16	78	81	15000	✓	37,51 €
PRS50-14-75	M14	28	75	50	14	16	103	106	15000	✓	39,98 €
PRS50-14-100	M14	28	100	50	14	16	128	131	15000	✓	42,31 €
PRS50-14-125	M14	28	125	50	14	16	153	156	15000	✓	44,61 €

\*Depending on availability - Dimensions in mm

## Our other products



SSB

Stainless steel bevel gear, 1:1



BABam

Self-locking ball pin lifting ring for threaded hole, Self-locking



ZDB

Machined plastic bevel gear , 2:1



GCB880

Curved track for slat top chain, Ranges 880 and 881



WW16

Drylin® W slide, slide assembly



CHB

Feet, For CHB gearbox



HTD8M\_50

HTD Heavy duty timing pulley, HTD8 Steel



CHAR16046

Spring hinge, screwed



PRF\_PL\_9090

Joining plate for aluminium profile, joint plate - 90x90 mm



CHM40-MOT

Asynchronous AC motorgearboxes 0.18 to 0.55kW, 0.18 to 0.55kW



CLG1

Moulded plastic spur gear, Moulded plastic (nylon)



PTKFss

Fixable foot for the food industry, Stainless steel - 3-A standard

## Complementary products



PRS30

Stainless steel articulated foot Ø30, Ø 30