

Floway2® roller track and basic support

RAG- FLOW2

Principal of operation




- The Floway-2® roller track allows storage systems to be created for plastic boxes or cardboard cartons

Support



- For easy installation of roller tracks
- Suitable for use in gravity feed conveyors
- Material:
Electro-galvanised steel

Assembly

- Slide the roller track into the end support
- Position the complete assembly on the supporting structure
- Track can be locked in place using a screw (tapped hole to be drilled on site)



Basic support

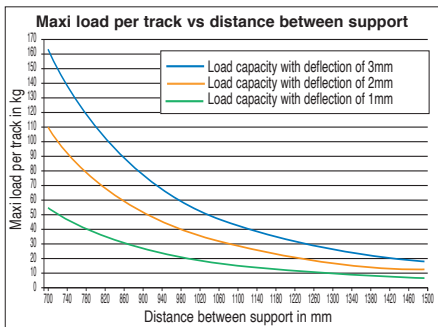

Support with stop



Floway2[®] roller track and basic support

For transporting and storage

RAG-FLOW2


- High density polyethylene roller
- Chromed steel guide (no deformation under load)
- Rollers rotate on steel axles
- Colour: Black

Special Features


- The possibility of being able to stagger the position of the rails increases the performance of the system



Roller track

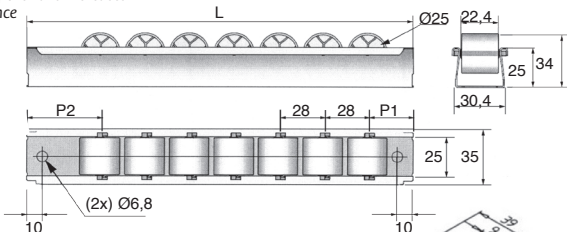


Basic support



RAG-FLOW2-A

Support with stop



RAG-FLOW2-B

DISCOUNTS Roller track DISCOUNTS Basic support

Qté	1+	5+	10+	Qté	1+	50+	100+
Disc. Prix	-5%	On request	On request	Disc. Prix	-5%	On request	On request

Roller track

Part number	P1	P2	Length L	N° of roller rollers	Max load per roller (kg)	Stock*	Price each
							1 à 4
RAG-FLOW2-1000	35	41	1000 ±1	980	34	10	✓ 24,51 €
RAG-FLOW2-2000	35	33	2046 ±1	2016	70	10	✓ 40,33 €

Basic support

Part number	Description	Thickness	Weight (g)	Stock*	Price each
					1 à 49
RAG-FLOW2-A	Basic support	2	124	✓	8,16 €
RAG-FLOW2-B	Support with stop	2	141	-	8,16 €

*Subject to available stocks - Dimensions in mm

Our other products




DOMI50
Connecting kits, XZ
linking kit




RTN
BoWex® curved tooth
gear coupling, Nylon



KSM
Cylindrical steel nut,
Steel - 1 thread



TBV
Manual lifting tables,
3kg



PM2
Wormwheel ,
Machined plastic
(delrin)



AT10courroie
AT type timing belt,
AT10 Steel cored
polyurethane



CHML63
Worm and wheel gear
reducer, up to 138
Nm - Integrated
torque limiter



EHD16
Internal epicyclic
servo reducers, from
210 to 380 Nm



PSG15S
Spur gear - precision
range, Stainless steel
316



AT5P_AT10P
Connecting plate for
AT type timing belts,
AT5



PRF-SMA
Closing system for
aluminium profile,
Easily adjustable lock



VB
Small 6 lobe threaded
handle - female,
Duroplast - Brass

Complementary products



RAGFLOW
Floway2® roller track,
Roller track



RAGb
Cylindrical brush
track, For gentle
conveying and
handling