

# Floway2® roller track and basic support

## RAG- FLOW2

### Principal of operation




- The Floway2® roller track allows storage systems to be created for plastic boxes or cardboard cartons

### Support



- For easy installation of roller tracks
- Suitable for use in gravity feed conveyors
- Material:
  - Electro-galvanised steel

### Assembly

- Slide the roller track into the end support
- Position the complete assembly on the supporting structure
- Track can be locked in place using a screw (tapped hole to be drilled on site)



Basic support

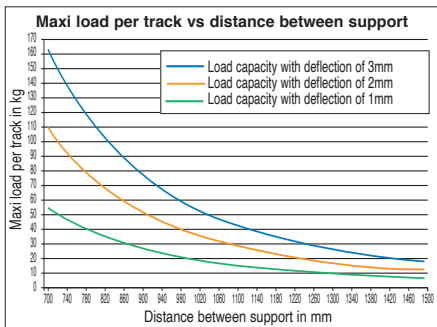

Support with stop



# Floway2® roller track and basic support

For transporting and storage

## RAG-FLOW2

- High density polyethylene roller
- Chromed steel guide (no deformation under load)
- Rollers rotate on steel axes
- Colour: Black

### Special Features


- The possibility of being able to stagger the position of the rails increases the performance of the system

Basic support


Roller track



Roller track

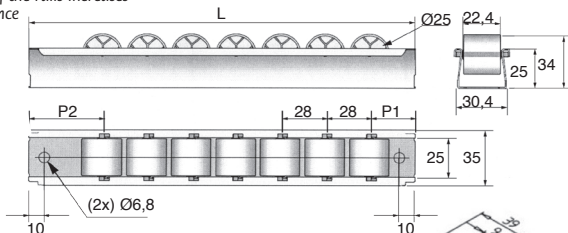


Basic support



RAG-FLOW2-A

Support with stop



RAG-FLOW2-B

### DISCOUNTS Roller track DISCOUNTS Basic support

#### Roller track

Qté	1+	5+	10+	Qté	1+	50+	100+
Disc.	Prix	-5%	On request	Disc.	Prix	-5%	On request

Part number	P1	P2	Length L	N° of rollers	Max load per roller (kg)	Stock*	Price each 1 à 4
RAG-FLOW2-1000	35	41	1000 ±1	980	34	10	✓ 24,51 €
RAG-FLOW2-2000	35	33	2046 ±1	2016	70	10	✓ 40,33 €

#### Basic support

Part number	Description	Thickness	Weight (g)	Stock*	Price each 1 à 49
RAG-FLOW2-A	Basic support	2	124	✓	8,16 €
RAG-FLOW2-B	Support with stop	2	141	-	8,16 €

\*Subject to available stocks - Dimensions in mm

## Our other products



Spur gear - precision range, Stainless steel 316



Deep groove ball bearing, Stainless steel




Hi-Klik TM indent hinge, Hi-Klik™ - Detent hinge



Motor-gearbox 12V and 24V DC, from 1.5 to 6 Nm



Stainless steel pillow block bearing, Stainless steel



Retaining cable for ball pin, Retaining cable



U-shaped cable clamp, Steel



Vari-Tork® slip friction clutch, 0.53 to 1.32 Nm



Sleeve for splined ball shaft, Chariot - from 514 N to 15386 N



High Temperature Castor, up to 200kg



Stainless steel bevel gear, 2:1



Horizontal stirrup toggle clamp, Horizontal stirrup clamp - steel

## Complementary products



Floway2® roller track, Roller track



Cylindrical brush track, For gentle conveying and handling