

# Floway2® roller track and basic support

## RAG- FLOW2

### Principal of operation




- The Floway-2® roller track allows storage systems to be created for plastic boxes or cardboard cartons

### Support



- For easy installation of roller tracks
- Suitable for use in gravity feed conveyors
- Material:  
Electro-galvanised steel

### Assembly

- Slide the roller track into the end support
- Position the complete assembly on the supporting structure
- Track can be locked in place using a screw (tapped hole to be drilled on site)



Basic support

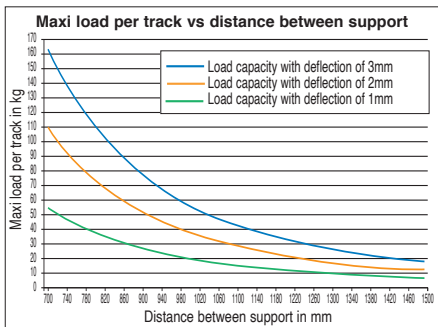

Support with stop



# Floway2® roller track and basic support

## For transporting and storage

# RAG-FLOW2


- High density polyethylene roller
- Chromed steel guide (no deformation under load)
- Rollers rotate on steel axles
- Colour: Black

### Special Features


- The possibility of being able to stagger the position of the rails increases the performance of the system



Roller track

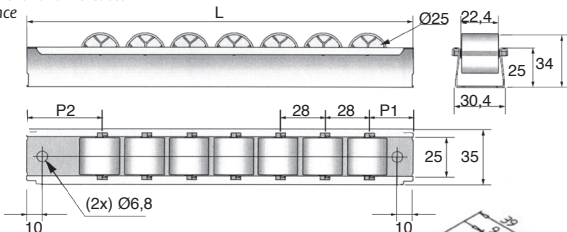


Basic support



RAG-FLOW2-A

Support with stop



RAG-FLOW2-B

### DISCOUNTS Roller track DISCOUNTS Basic support

Qté	1+	5+	10+	Qté	1+	50+	100+
Disc. Prix	-5%	On request	On request	Disc. Prix	-5%	On request	On request

#### Roller track

Part number	P1	P2	Length L	N° of roller rollers	Max load per roller (kg)	Stock*	Price each
							1 à 4
RAG-FLOW2-1000	35	41	1000 ±1	980	34	10	✓ 24,51 €
RAG-FLOW2-2000	35	33	2046 ±1	2016	70	10	✓ 40,33 €

#### Basic support

Part number	Description	Thickness	Weight (g)	Stock*	Price each
					1 à 49
RAG-FLOW2-A	Basic support	2	124	✓	8,16 €
RAG-FLOW2-B	Support with stop	2	141	-	8,16 €

\*Subject to available stocks - Dimensions in mm

## Our other products



RBGpl

Swivel castor with plate, Steel - grey rubber



MRA\_SS

Stainless steel Quick link, Stainless steel



DILC

Indexing plunger with cam, with cam



UGPC

Actuator guide kit, Short bearing



SSG1\_304L

Stainless steel spur gear, Stainless steel 304L



OP3

Mechanical digital position indicator, 4 numbers



H1

Crossed helical gear crossed axis at 90°, Steel 20NCD2




M

Bellows cover, Accessory:



G4-ECO

Eco range Spur gear, Steel C45



PRF4545r90

Standard aluminium profile, 45 x 45 mm - R90°



RTK

BoWex® curved tooth gear coupling, Nylon and steel



RPP

Connecting plate for RPP type timing belts, RPP14

## Complementary products



RAGFLOW

Floway2® roller track, Roller track