


- **Plastic construction**
- Light weight
- Low cost version
- Corrosion resistant
- Available in 2 sizes
- Supplied without handle

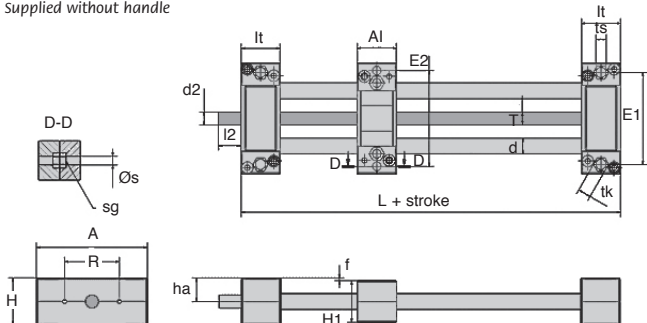


Part number	Max stroke [mm]	Aluminium profile		Notes
		Weight [kg]	Add weight (/0.1m stroke)	
SHTP-01-06	300	0,11	0,06	Square carriage with 4 symmetrical mounting holes
SHTP-01-12	750	0,35	0,11	Smooth guides and nuts in iglidur®J
SHTP-02-12	750	0,35	0,11	-

Part number	A	Al	H	E1	E2	L	R	f	lt	tk	ts
SHTP-01-06	45	45	19	38	36,5	67	25	1	11	8	4,2
SHTP-01-12	85	30	36	70	73,0	90	42	2	30	10	6,6
SHTP-02-12	85	30	36	70	73,0	90	42	2	30	10	6,6

Part number	s	sg	d	T	l2	d2* standard	ha	H1
SHTP-01-06	5,0	-	6	M8	15	M8	9	18
SHTP-01-12	6,3	M6	12	TR10x2	17	TR10x2	16	32
SHTP-02-12	6,3	M6	12	TR10x2	17	TR10x2	16	32

Dimensions in mm

Economical

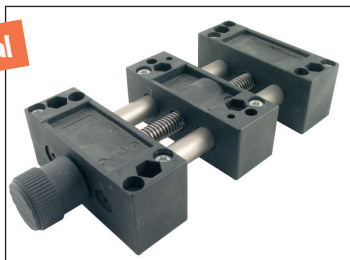

DISCOUNTS

Qty	1+	2+	3+
Disc.	List	-10%	On request

Part number	Stroke (mm)	Stock*	Price each
SHTP-01-06-100	100	✓	105,45 €
SHTP-01-06-250	250	✓	132,76 €
SHTP-01-12-100	100	✓	146,51 €
SHTP-01-12-250	250	✓	183,14 €
SHTP-01-12-500	500	-	219,30 €
SHTP-02-12-100	100	✓	111,31 €
SHTP-02-12-250	250	✓	138,62 €
SHTP-02-12-500	500	-	184,11 €

Dimensions in mm

Our other products



UGAC_UGET

Actuator guide kit,
Coupling for threaded
cylinder end



PPS

Lifting ring, Universal
threaded




CHA60

Rectangular hinge,
drilled or countersunk,
Rectangular, drilled or
C...



M2

Worm and wheel set,
Bronze



TBV

Manual lifting tables,
20kg



FF20

Offset spur gear
reducer, from 5.80 to
23 Nm



DB_ECO

Eco. range steel bevel
gear, 2:1



PW_PWG2

Worm - precision
range, Stainless steel




ACA

Steel splined shaft,
Steel



DEP

Tools Hygienic Usit®
and Hygienic
Design®, Socket for



PO

Pull handle - Multi-
sector, Tapped
recessed insert



CLSCLP

Clevis components,
short version, Steel -
Short range

Complementary products



SHTC

Drylin® Linear table,
Maintenance free