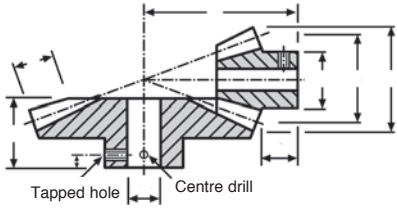
## Stainless steel 304L

**Ratio**
**2:1**
**3:1**
**4:1**

- ***Module* 0.8 to 2.5**
- *Teeth Gleason*
- *Material:*
  *stainless steel 304L*
- *Pressure angle 20°*







| TORQUE AND POWER INDICATION | For 20 teeth at 1000 rpm | | | | | |
|---|---|---|---|---|---|---|
| | 2.5 MOD | 2.0 MOD | 1.5 MOD | 1.25 MOD | 1.0 MOD | 0.8 MOD |
| Torque (Nm) | 4.30 | 2.20 | 0.94 | 0.71 | 0.57 | 0.14 |
| Power (kW) | 0.455 | 0.231 | 0.097 | 0.08 | 0.03 | 0.015 |

**DISCOUNTS**

| Qty | 1+ | 6+ | 20+ |
|---|---|---|---|
| Disc. | List | -12% | On request |

| Part number | Teeth Z | Module | ØP | E | ØD | ØA | ØM | F | G | H | Screw R | T | Price each 1 to 5 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SSDB0.8-15 | 15 | 0,8 | 12,00 | 20,00 | 13,93 | 6 | 10 | 11,90 | 7,50 | 4,02 | M3 | 3,50 | 46,73 € |
| SSDB0.8-30 | 30 | | 24,00 | 14,00 | 24,64 | 8 | 20 | 10,08 | 5,50 | 4,02 | M3 | 3,50 | 55,09 € |
| SSDB1-15 | 15 | 1 | 15,00 | 24,00 | 17,42 | 8 | 14 | 13,87 | 8,76 | 5,03 | M4 | 4,00 | 52,99 € |
| SSDB1-30 **2:1** | 30 | | 30,00 | 18,00 | 30,58 | 10 | 25 | 13,11 | 7,00 | 5,03 | M4 | 4,00 | 65,15 € |
| SSDB1.5-15 | 15 | 1,5 | 22,50 | 35,00 | 26,12 | 10 | 21 | 19,84 | 12,13 | 7,55 | M4 | 5,00 | 57,68 € |
| SSDB1.5-30 | 30 | | 45,00 | 27,00 | 45,87 | 10 | 30 | 19,66 | 11,00 | 7,55 | M4 | 5,00 | 74,05 € |
| SSDB2-15 | 15 | 2 | 30,00 | 45,00 | 34,83 | 12 | 28 | 24,76 | 14,86 | 10,06 | M5 | 7,50 | 63,95 € |
| SSDB2-30 | 30 | | 60,00 | 35,00 | 61,16 | 12 | 40 | 25,21 | 14,00 | 10,06 | M5 | 8,00 | 88,65 € |
| SSDB2.5-15 | 15 | 2,5 | 37,50 | 54,00 | 43,54 | 15 | 32 | 29,51 | 16,51 | 13,53 | M5 | 8,00 | 87,37 € |
| SSDB2.5-30 | 30 | | 75,00 | 41,50 | 76,45 | 15 | 30 | 29,31 | 13,31 | 13,53 | M5 | 7,00 | 121,37 € |
| SSTB0,8-15 | 15 | 0,8 | 12,00 | 28,00 | 14,14 | 6 | 10 | 15,63 | 9,67 | 5,69 | M3 | 5,00 | On request |
| SSTB0.8-45 | 45 | | 36,00 | 20,00 | 36,30 | 8 | 28 | 16,07 | 8,00 | 5,69 | M3 | 4,00 | |
| SSTB1-15 | 15 | 1 | 15,00 | 32,00 | 17,67 | 8 | 13 | 16,54 | 9,18 | 7,12 | M4 | 4,50 | |
| SSTB1-45 **3:1** | 45 | | 45,00 | 24,00 | 45,37 | 10 | 40 | 19,09 | 10,00 | 7,12 | M4 | 5,00 | |
| SSTB1.5-15 | 15 | 1,5 | 22,50 | 45,00 | 26,51 | 10 | 18 | 21,80 | 10,51 | 10,67 | M4 | 5,00 | |
| SSTB1.5-45 | 45 | | 67,50 | 32,00 | 68,06 | 15 | 50 | 24,63 | 12,00 | 10,67 | M4 | 6,00 | |
| SSFB0.8-15 | 15 | 0,8 | 12,00 | 35,00 | 14,23 | 6 | 10 | 18,07 | 10,58 | 7,10 | M3 | 5,00 | |
| SSFB0.8-60 | 60 | | 48,00 | 20,00 | 48,22 | 8 | 30 | 15,98 | 8,00 | 7,10 | M3 | 4,00 | |
| SSFB1-15 | 15 | 1 | 15,00 | 45,00 | 17,79 | 8 | 13 | 24,22 | 14,73 | 9,28 | M4 | 7,00 | |
| SSFB1-60 **4:1** | 60 | | 60,00 | 30,00 | 60,27 | 10 | 40 | 25,08 | 12,00 | 9,28 | M4 | 6,00 | |
| SSFB1,5-15 | 15 | 1,5 | 22,50 | 60,00 | 26,69 | 10 | 18 | 28,82 | 12,08 | 13,91 | M4 | 6,00 | |
| SSFB1,5-60 | 60 | | 60,00 | 35,00 | 90,41 | 15 | 50 | 27,61 | 12,00 | 13,91 | M4 | 6,00 | |

*Dimensions in mm*

# Our other products




Conical elasto buffer, Steel




RPP heavy duty timing belt, RPP5




Cam follower without axial guide, With interior ring




Tool for thread repair inserts, Assembly tool




Adjustement bushing for half-rail guide, Adjustment bushing




Chain sprocket - steel, 12.7mm (DIN08B-1)




Dual purpose strip and cover for aluminium profile, Inserts into slot




Elastic ringed latch, Hooks into a slot





Miniature friction hinge, Friction




Worm, Non hardened steel




Lock for aluminium profile, Quick fitting,




Worm and wheel gear reducer, up to 18 Nm

## Complementary products




Steel bevel gear, 2:1




Machined plastic bevel gear , 2:1