


Stainless steel 304L

Ratio
2:1
3:1
4:1

- Module 0.8 to 2.5
- Teeth Gleason
- Material:
stainless steel 304L
- Pressure angle 20°

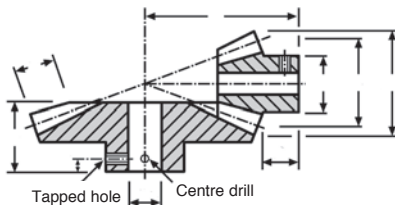

stainless steel

TORQUE AND POWER INDICATION	For 20 teeth at 1000 rpm					
	2.5 MOD	2.0 MOD	1.5 MOD	1.25 MOD	1.0 MOD	0.8 MOD
Torque (Nm)	4.30	2.20	0.94	0.71	0.57	0.14
Power (kW)	0.455	0.231	0.097	0.08	0.03	0.015

DISCOUNTS


Qty	1+	6+	20+
Disc.	List	-12%	On request

Part number	Teeth		Z	Module	ØP	E	ØD	ØA	ØM	F	G	H	Screw		Price each 1 to 5
	Z	Module											R	T	
SSDB0.8-15	15	0,8	12,00	20,00	13,93	6	10	11,90	7,50	4,02	M3	3,50	46,73	€	
SSDB0.8-30	30		24,00	14,00	24,64	8	20	10,08	5,50	4,02	M3	3,50	55,09	€	
SSDB1-15	15	2:1	15,00	24,00	17,42	8	14	13,87	8,76	5,03	M4	4,00	52,99	€	
SSDB1-30	30	1	30,00	18,00	30,58	10	25	13,11	7,00	5,03	M4	4,00	65,15	€	
SSDB1.5-15	15	1,5	22,50	35,00	26,12	10	21	19,84	12,13	7,55	M4	5,00	57,68	€	
SSDB1.5-30	30		45,00	27,00	45,87	10	30	19,66	11,00	7,55	M4	5,00	74,05	€	
SSDB2-15	15	2	30,00	45,00	34,83	12	28	24,76	14,86	10,06	M5	7,50	63,95	€	
SSDB2-30	30		60,00	35,00	61,16	12	40	25,21	14,00	10,06	M5	8,00	88,65	€	
SSDB2.5-15	15	2,5	37,50	54,00	43,54	15	32	29,51	16,51	13,53	M5	8,00	87,37	€	
SSDB2.5-30	30		75,00	41,50	76,45	15	30	29,31	13,31	13,53	M5	7,00	121,37	€	
SSTB0.8-15	15	0,8	12,00	28,00	14,14	6	10	15,63	9,67	5,69	M3	5,00			
SSTB0.8-45	45		36,00	20,00	36,30	8	28	16,07	8,00	5,69	M3	4,00			
SSTB1-15	15	3:1	15,00	32,00	17,67	8	13	16,54	9,18	7,12	M4	4,50			
SSTB1-45	45	1	45,00	24,00	45,37	10	40	19,09	10,00	7,12	M4	5,00			
SSTB1.5-15	15	1,5	22,50	45,00	26,51	10	18	21,80	10,51	10,67	M4	5,00			
SSTB1.5-45	45		67,50	32,00	68,06	15	50	24,63	12,00	10,67	M4	6,00			
SSFB0.8-15	15	0,8	12,00	35,00	14,23	6	10	18,07	10,58	7,10	M3	5,00			
SSFB0.8-60	60		48,00	20,00	48,22	8	30	15,98	8,00	7,10	M3	4,00			
SSFB1-15	15	4:1	15,00	45,00	17,79	8	13	24,22	14,73	9,28	M4	7,00			
SSFB1-60	60	1	60,00	30,00	60,27	10	40	25,08	12,00	9,28	M4	6,00			
SSFB1.5-15	15	1,5	22,50	60,00	26,69	10	18	28,82	12,08	13,91	M4	6,00			
SSFB1.5-60	60		60,00	35,00	90,41	15	50	27,61	12,00	13,91	M4	6,00			

Dimensions in mm

On request


Our other products



TBV
Manual lifting tables,
7kg



PSG35
Spur gear - precision
range, Stainless steel
316



RPP5
RPP heavy duty
timing belt, RPP5



PM2
Worm and wheel set,
Hardened steel



IBJ
180° ball and socket
joints, Steel



PLA
Flat magnet, Flat
magnet with threaded
hole



PRF_PL_4590
Joining plate for
aluminium profile,
Joint plate - 45x90
mm



CAP821
Slat top chain acetal,
Large range 821



WS20
Drylin® W rail, Rail



BLHB60
Right angled gearbox,
bored shafts, up to 70



MSP38
Masterplate®
glueable insert Ø38,



LRR
Spring loaded latch,
Spring loaded latch

Complementary products



DB
Steel bevel gear, 2:1



ZDB
Machined plastic
bevel gear , 2:1