


## Stainless steel 304L

Ratio  
**2:1**  
**3:1**  
**4:1**

- Module 0.8 to 2.5
- Teeth Gleason
- Material:  
stainless steel 304L
- Pressure angle 20°

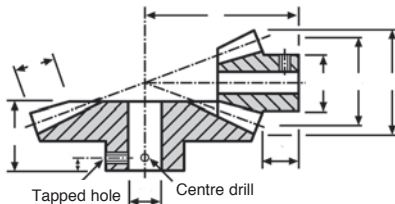

stainless steel

TORQUE AND POWER INDICATION	For 20 teeth at 1000 rpm					
	2.5 MOD	2.0 MOD	1.5 MOD	1.25 MOD	1.0 MOD	0.8 MOD
Torque (Nm)	4.30	2.20	0.94	0.71	0.57	0.14
Power (kW)	0.455	0.231	0.097	0.08	0.03	0.015

### DISCOUNTS

Qty	1+	6+	20+
Disc.	List	-12%	On request

Part number	Teeth		Z	Module	ØP	E	ØD	ØA	ØM	F	G	H	Screw		Price each 1 to 5
	Z	Module											R	T	
SSDB0.8-15	15	0,8	12,00	20,00	13,93	6	10	11,90	7,50	4,02	M3	3,50	46,73	€	
SSDB0.8-30	30		24,00	14,00	24,64	8	20	10,08	5,50	4,02	M3	3,50	55,09	€	
SSDB1-15	15	2:1	15,00	24,00	17,42	8	14	13,87	8,76	5,03	M4	4,00	52,99	€	
SSDB1-30	30	1	30,00	18,00	30,58	10	25	13,11	7,00	5,03	M4	4,00	65,15	€	
SSDB1.5-15	15	1,5	22,50	35,00	26,12	10	21	19,84	12,13	7,55	M4	5,00	57,68	€	
SSDB1.5-30	30		45,00	27,00	45,87	10	30	19,66	11,00	7,55	M4	5,00	74,05	€	
SSDB2-15	15	2	30,00	45,00	34,83	12	28	24,76	14,86	10,06	M5	7,50	63,95	€	
SSDB2-30	30		60,00	35,00	61,16	12	40	25,21	14,00	10,06	M5	8,00	88,65	€	
SSDB2.5-15	15	2,5	37,50	54,00	43,54	15	32	29,51	16,51	13,53	M5	8,00	87,37	€	
SSDB2.5-30	30		75,00	41,50	76,45	15	30	29,31	13,31	13,53	M5	7,00	121,37	€	
SSTB0.8-15	15	0,8	12,00	28,00	14,14	6	10	15,63	9,67	5,69	M3	5,00			
SSTB0.8-45	45		36,00	20,00	36,30	8	28	16,07	8,00	5,69	M3	4,00			
SSTB1-15	15	3:1	15,00	32,00	17,67	8	13	16,54	9,18	7,12	M4	4,50			
SSTB1-45	45	1	45,00	24,00	45,37	10	40	19,09	10,00	7,12	M4	5,00			
SSTB1.5-15	15	1,5	22,50	45,00	26,51	10	18	21,80	10,51	10,67	M4	5,00			
SSTB1.5-45	45		67,50	32,00	68,06	15	50	24,63	12,00	10,67	M4	6,00			
SSFB0.8-15	15	0,8	12,00	35,00	14,23	6	10	18,07	10,58	7,10	M3	5,00			
SSFB0.8-60	60		48,00	20,00	48,22	8	30	15,98	8,00	7,10	M3	4,00			
SSFB1-15	15	4:1	15,00	45,00	17,79	8	13	24,22	14,73	9,28	M4	7,00			
SSFB1-60	60	1	60,00	30,00	60,27	10	40	25,08	12,00	9,28	M4	6,00			
SSFB1.5-15	15	1,5	22,50	60,00	26,69	10	18	28,82	12,08	13,91	M4	6,00			
SSFB1.5-60	60		60,00	35,00	90,41	15	50	27,61	12,00	13,91	M4	6,00			

Dimensions in mm

On request

## Our other products




PRF\_GAL

Roller for aluminium profile, Fixing kit for roller eccentric



CLSCLP

Clevis components, short version, Steel - short range



IN1

Internal gear, Machined plastic (delrin)



E30

Right angle helical reducers, from 1.50 to 9 Nm



WW10

Drylin® W slide, slide assembly



BAGtr

Lead screw clamping collar, Aluminium



RPP

Connecting plate for RPP type timing belts, RPP14



BH02

Single housed bearing assembly, Bearing secured with circlips



VTAP

Magnetic head screw, With rubber coating



AZY

Cylindrical elasto mount, Steel



AT5M\_AT10M

AT type timing belt per metre, AT5 Steel



FRss

Stainless steel thread inserts, Stainless steel

## Complementary products



DB

Steel bevel gear, 2:1



MDB\_MTB

Moulded plastic bevel gear (nylon), 2:1