


- **Module 1.5 to 5**
- Teeth conform to DIN 3967 except for Module 1 models which are Gleason
- Pressure angle: 20°
- Material: steel C43
- A pair requires 2 gears

### Info.

- **\*\*Pilot bore dimensions given as a guide only and are subject to change.**

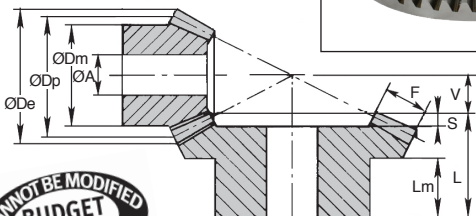

### DISCOUNTS

Qty	1+	4+	10+
Disc.	List	-5%	On request

Part number	Teeth		OD <sub>p</sub>	OD <sub>e</sub>	F	L	OD <sub>m</sub>	Pilot bore not guaranteed				Stock*	Price each 1 to 3
	Z	mod						OA**	V	S	Lm		
TB1-15/ECO	15	1	15	17,7	7,1	16,6	13,3	4	15,4	-	9,2	-	-
TB1-45/ECO	45	1	45	45,3	7,1	17,1	25,3	8	4,9	1,9	10	-	-
TB1-5-16/ECO	16	1,5	24	26,82	12	24,0	20	10	24,42	1,0	11,7	✓	20,70 €
TB1-5-48/ECO	48	1,5	72	72,95	12	20,0	50	12	7,27	3,0	10,0	✓	63,85 €
TB2-16/ECO	16	2	32	35,80	15	28,5	26	12	33,26	1,5	12,4	✓	24,54 €
TB2-48/ECO	48	2	96	97,26	15	23,0	60	15	9,90	4,0	10,0	✓	80,10 €
TB2-5-16/ECO	16	2,5	40	44,74	18	32,0	32	12	42,41	1,5	13,0	-	36,98 €
TB2-5-48/ECO	48	2,5	120	121,58	18	26,0	70	20	12,60	5,0	10,0	-	93,43 €
TB3-16/ECO	16	3	48	53,69	18	32,0	40	15	54,25	2,0	12,1	✓	41,62 €
TB3-48/ECO	48	3	144	145,90	18	29,0	80	20	16,20	6,0	10,0	✓	112,87 €
TB3-5-16/ECO	16	3,5	56	62,64	22	38,0	48	15	62,29	2,5	15,0	-	52,92 €
TB3-5-48/ECO	48	3,5	168	170,21	22	31,0	90	20	18,48	7,0	10,0	-	149,45 €
TB4-16/ECO	16	4	64	71,59	25	41,5	55	20	71,23	3,0	15,2	✓	59,60 €
TB4-48/ECO	48	4	192	194,53	25	33,0	100	20	21,20	8,0	10,0	-	249,12 €
TB4-5-16/ECO	16	4,5	72	80,53	28	53,0	60	20	80,27	3,0	23,4	-	68,32 €
TB4-5-48/ECO	48	4,5	216	218,84	28	49,0	100	20	23,93	9,0	18,0	-	451,59 €
TB5-16/ECO	16	5	80	89,48	35	60,0	60	20	85,61	3,0	22,5	-	74,83 €
TB5-48/ECO	48	5	240	243,16	35	50,0	150	20	25,45	10,0	20,0	-	537,22 €

\*Depending on availability - Dimensions in mm

## Our other products



Brush strip per meter  
PP fibres Ø0.2, Black  
striated polypropylene  
...



Square tube  
connector, Fixed  
angle



HTD Heavy duty  
timing pulley, HTD14  
Steel



Miniature motorised  
actuator 2A, 2 ampers




Dowel pin, Solid ISO  
2338



Stainless steel flexible  
bellows coupling,  
Stainless steel - with  
se...



Connecting kits, XZ  
linking kit



Worm and wheel set,  
Machined plastic  
(delrin)



Indexing plunger,  
steel class 5.8



Joining plate for  
aluminium profile,



Crossed helical gear  
crossed axis at 90°,



Catch-plate for latch,  
Catch-plate

Complementary products