


- **Module 1.5 to 5**
- Teeth conform to DIN 3967 except for Module 1 models which are Gleason
- Pressure angle: 20°
- Material: steel C43
- A pair requires 2 gears

### Info.

- **\*\*Pilot bore dimensions given as a guide only and are subject to change.**

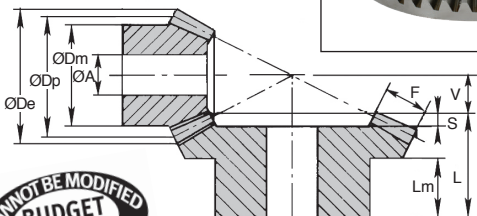

### DISCOUNTS

Qty	1+	4+	10+
Disc.	List	-5%	On request

Part number	Teeth		OD <sub>p</sub>	OD <sub>e</sub>	F	L	OD <sub>m</sub>	Pilot bore not guaranteed				Stock*	Price each 1 to 3
	Z	mod						OA**	V	S	Lm		
TB1-15/ECO	15	1	15	17,7	7,1	16,6	13,3	4	15,4	-	9,2	-	-
TB1-45/ECO	45	1	45	45,3	7,1	17,1	25,3	8	4,9	1,9	10	-	-
TB1-5-16/ECO	16	1,5	24	26,82	12	24,0	20	10	24,42	1,0	11,7	✓	20,70 €
TB1-5-48/ECO	48		72	72,95	12	20,0	50	12	7,27	3,0	10,0	✓	63,85 €
TB2-16/ECO	16	2	32	35,80	15	28,5	26	12	33,26	1,5	12,4	✓	24,54 €
TB2-48/ECO	48		96	97,26	15	23,0	60	15	9,90	4,0	10,0	✓	80,10 €
TB2-5-16/ECO	16	2,5	40	44,74	18	32,0	32	12	42,41	1,5	13,0	-	36,98 €
TB2-5-48/ECO	48		120	121,58	18	26,0	70	20	12,60	5,0	10,0	-	93,43 €
TB3-16/ECO	16	3	48	53,69	18	32,0	40	15	54,25	2,0	12,1	✓	41,62 €
TB3-48/ECO	48		144	145,90	18	29,0	80	20	16,20	6,0	10,0	✓	112,87 €
TB3-5-16/ECO	16	3,5	56	62,64	22	38,0	48	15	62,29	2,5	15,0	-	52,92 €
TB3-5-48/ECO	48		168	170,21	22	31,0	90	20	18,48	7,0	10,0	-	149,45 €
TB4-16/ECO	16	4	64	71,59	25	41,5	55	20	71,23	3,0	15,2	✓	59,60 €
TB4-48/ECO	48		192	194,53	25	33,0	100	20	21,20	8,0	10,0	-	249,12 €
TB4-5-16/ECO	16	4,5	72	80,53	28	53,0	60	20	80,27	3,0	23,4	-	68,32 €
TB4-5-48/ECO	48		216	218,84	28	49,0	100	20	23,93	9,0	18,0	-	451,59 €
TB5-16/ECO	16	5	80	89,48	35	60,0	60	20	85,61	3,0	22,5	-	74,83 €
TB5-48/ECO	48		240	243,16	35	50,0	150	20	25,45	10,0	20,0	-	537,22 €

\*Depending on availability - Dimensions in mm

## Our other products



MSP3815  
Masterplate®  
glueable insert  
rectangular,  
rectangular with



PV1R  
Adjustable suction-  
cup support, Standard  
grip



UCFL\_SS  
Stainless steel flanged  
bearing, Stainless  
steel




SVG  
Adjustable latch  
clamp with strike  
plate, Stroke from  
118mm to 130,5mm



BPLF  
Ball transfer unit light  
duty, Light



SLB  
Indexing plunger,  
steel class 5.8



LRH  
Bi-directional  
leadscrew, Bi-  
directional - 1 thread



DOMI80  
Connecting kits, XY  
linking kit



CHAuss  
Screwed hinge, 270°



SHSS  
Shoulder screw  
stainless steel 416,



TBbutee  
Axial thrust bearing,  
Steel balls



BAC110  
Swivel storage bin,  
Adjustable support

Complementary products