

# Rigging screw with 2 hooks

Stock Ste

TCC


Turnbuckle

- Stamped Rigging screw with two hooks
- Fitting component
- Material: zinc plated steel Fe430B



## Info.

- SWL: safe working load.  
The Safe Working Load is calculated by dividing the breaking load by a factor of safety of 3
- \*\* Not sold individually, please contact us for details

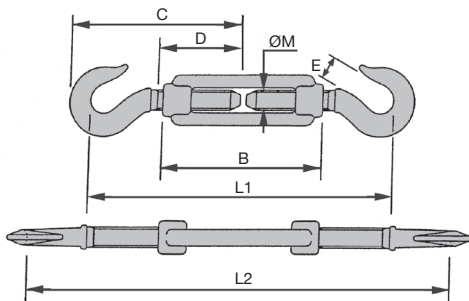

## DISCOUNTS

Qty	1+	5+	10+	20+	30+	50+
Disc.	List	-5%	-10%	-15%	-20%	On request

Part number	ØM	B	C	D	E	L1	L2	SWL (kg)	Weight (kg)	Stock*	Price each 1 to 4
TCC1-05	M5	80	62	40	6	116	178	50	0,052	✓	2,80 €
TCC1-06	M6	80	76	50	8	143	205	75	0,065	✓	3,11 €
TCC1-08	M8	105	88	52	10	165	245	165	0,136	✓	4,24 €
TCC1-10	M10	125	111	60	12	213	307	235	0,220	✓	6,03 €
TCC1-12	M12	140	130	66	15	252	350	320	0,420	-	8,48 €
TCC1-14	M14	170	147	86	15	277	407	420	0,640	-	12,90 €
TCC1-16	M16	190	172	105	20	298	463	530	0,880	✓	17,14 €

\*Depending on availability - Dimensions in mm

HPC

WEB  
04/2020

www.hpceurope.com

Tél: 0 825 88 5000 Service 0,15 €/min + prix appel

## Our other products



SCR

Suction cup threaded insert, Adaptor for insert



PRF4545\_P

Stripp Aluminium profile with extendable slot, 45 x 45 mm



PRF\_CLIP\_22

Cable clip for aluminium profile, For electric and pneumatic cables



PCS50K

Chain sprocket with hardened teeth, 12.7mm (DIN08B-1)



FBL4004\_K32

Brush strip per metre, Black striated polypropylene (PP)



CHAB

Hinge with stop, Hinge



T39\_T49

Extension spring in metre length stainless steel, by the metre



SLH-M

Nut for toggle clamp, Round ended nut for SLH/SLV clamp



SLVHlok

Vertical toggle clamp, Vertical toggle clamp /



RFK38C

Hypoid gearbox - Stainless steel, up to



GMK17\_BR

Clamp for guiding profile, Rounded only



PM2

Worm and wheel set, Non hardened steel

## Complementary products



TCC\_SS

Stainless steel rigging screw (hook/hook), Stainless steel



TAC

Rigging screw (hook/eye), Steel



MDR

Dee shackle with eye bolt, Steel



MLY

Bow shackle with eye bolt, Steel