

Rigging screw with 2 hooks

Stock Ste

TCC


Turnbuckle

- Stamped Rigging screw with two hooks
- Fitting component
- Material: zinc plated steel Fe430B



Info.

- SWL: safe working load.
The Safe Working Load is calculated by dividing the breaking load by a factor of safety of 3
- ** Not sold individually, please contact us for details

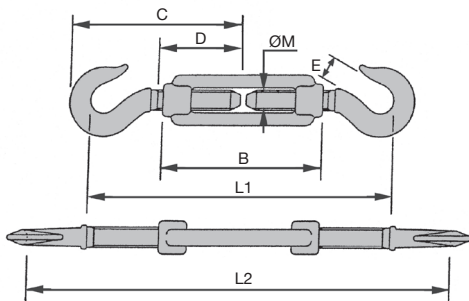

DISCOUNTS

Qty	1+	5+	10+	20+	30+	50+
Disc.	List	-5%	-10%	-15%	-20%	On request

Part number	ØM	B	C	D	E	L1	L2	SWL (kg)	Weight (kg)	Stock*	Price each 1 to 4
TCC1-05	M5	80	62	40	6	116	178	50	0,052	✓	2,80 €
TCC1-06	M6	80	76	50	8	143	205	75	0,065	✓	3,11 €
TCC1-08	M8	105	88	52	10	165	245	165	0,136	✓	4,24 €
TCC1-10	M10	125	111	60	12	213	307	235	0,220	✓	6,03 €
TCC1-12	M12	140	130	66	15	252	350	320	0,420	-	8,48 €
TCC1-14	M14	170	147	86	15	277	407	420	0,640	-	12,90 €
TCC1-16	M16	190	172	105	20	298	463	530	0,880	✓	17,14 €

*Depending on availability - Dimensions in mm

Our other products



PTA80

Articulated levelling foot, pressed base Ø80, Ø 80



YG1

HEAVY DUTY spur gear, Steel 35NCD6



EKGS

Backlash free coupling Gerwah®, from 0.5 to 35Nm



CHTRB

Single and dual output gearboxes, Up to 16,5 Nm



PDD

Actuating plunger, Non-rotating detector shaft



PR820

Idler sprocket for slat top chain, Rangs 820 and 815



COA-COG

Surface mounting plate, Surface mounting plate for ball joint



PRES

Manual workbench press accessory for PRES-3HR end PRES-4HR, Micromet...



NKX

Combined bearing without inner ring,



PAP

Handle for aluminium profile, Ergonomic



SA_SAKH

Housing for linear bearing, Closed - light



HG6

Steel spur gear, Steel 20NCD2

Complementary products



TCC_SS

Stainless steel rigging screw (hook/hook), Stainless steel



TAC

Rigging screw (hook/eye), Steel



MDR

Dee shackle with eye bolt, Steel



MLY

Bow shackle with eye bolt, Steel