

Rigging screw with 2 hooks

Stock Ste

TCC


Turnbuckle

- Stamped Rigging screw with two hooks
- Fitting component
- Material: zinc plated steel Fe430B



Info.

- SWL: safe working load.
The Safe Working Load is calculated by dividing the breaking load by a factor of safety of 3
- ** Not sold individually, please contact us for details

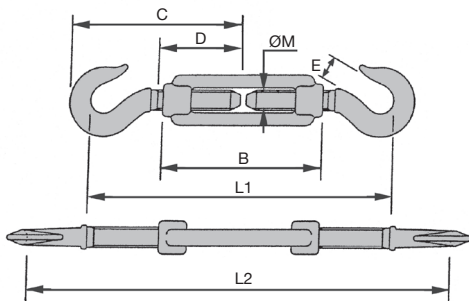

DISCOUNTS

Qty	1+	5+	10+	20+	30+	50+
Disc.	List	-5%	-10%	-15%	-20%	On request

Part number	ØM	B	C	D	E	L1	L2	SWL (kg)	Weight (kg)	Stock*	Price each 1 to 4
TCC1-05	M5	80	62	40	6	116	178	50	0,052	✓	2,80 €
TCC1-06	M6	80	76	50	8	143	205	75	0,065	✓	3,11 €
TCC1-08	M8	105	88	52	10	165	245	165	0,136	✓	4,24 €
TCC1-10	M10	125	111	60	12	213	307	235	0,220	✓	6,03 €
TCC1-12	M12	140	130	66	15	252	350	320	0,420	-	8,48 €
TCC1-14	M14	170	147	86	15	277	407	420	0,640	-	12,90 €
TCC1-16	M16	190	172	105	20	298	463	530	0,880	✓	17,14 €

*Depending on availability - Dimensions in mm

HPC

WEB
04/2020

www.hpceurope.com

Tél: 0 825 88 5000 Service 0,15 €/min + prix appel

Our other products



SVT15
Screwjack with travelling screw, with translating screw



BABam
Self-locking ball pin lifting ring for threaded hole, Self-locking



WTM
Tightening washer - DIN6340, Steel



NKXR
Combined bearing without inner ring, Needle and cylindrical rollers



PTA100ssEB
Articulated foot with sheet metal base Ø100, Articulated foot



VTLF
3 lobed handle, Polyamide - Brass



GMK17_BR
Clamp for guiding profile, Rounded only - double



LRR22
Small dimension latch with locking system, Aluminium



RJA00_02
Sealing strip, Clipping



GCT
Pipe lynch pin, Tube lynch pin



F7-SF-SM
Multifunction display, Mounting bracket for



MFB_MHB
Moulded plastic bevel gear (nylon), 4:1

Complementary products



TCC_SS
Stainless steel rigging screw (hook/hook), Stainless steel



TAC
Rigging screw (hook/eye), Steel



MDR
Dee shackle with eye bolt, Steel



MLY
Bow shackle with eye bolt, Steel