

Automatic chain tensioner

With sprocket

TCRX

- **Tensioner for single chain**

- **Materials:**

Housing and column: polyamide reinforced with 30% glass fibre


Screws and springs: stainless steel 304L

Steel version: bracket and sprocket steel

Stainless steel version: bracket, axle and nut

stainless steel 304L, stainless steel sprocket, sprocket bearing lubricated for life (FM 222 grease suitable for food industry acc USA standards).

steel or stainless steel

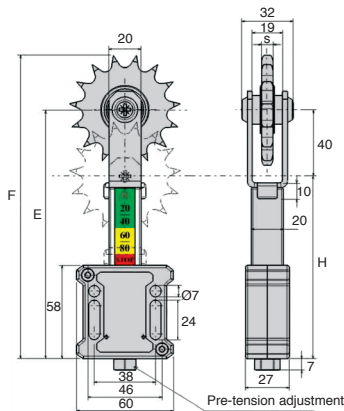

DISCOUNTS

Qty	1+	4+	10+
Disc.	List	-10%	On request

Part number	Chain Pitch	N° of teeth	S	Øext	ØPCD	F	E	H	Stroke	Tension (N)	Price each	
											1 to 3	
Steel sprocket												
TCRX-06B1	06B1	9,525	15	5,3	49,3	45,81	160	135,0	95,0	40	100 to 240	67,46 €
TCRX-08B1	08B1	12,700	15	7,2	65,5	61,09	186	153,5	113,5	40	100 to 240	66,79 €
TCRX-10B1	10B1	15,875	15	9,1	83,0	76,36	196	153,5	113,5	40	100 to 240	71,33 €
Stainless steel sprocket												
TCRX-06B1/SS	06B1	9,525	15	5,3	49,3	45,81	160	135,0	95,0	40	100 to 240	83,28 €
TCRX-08B1/SS	08B1	12,700	15	7,2	65,5	61,09	186	153,5	113,5	40	100 to 240	88,58 €
TCRX-10B1/SS	10B1	15,875	15	9,1	83,0	76,36	196	153,5	113,5	40	100 to 240	113,16 €

Dimensions in mm

Our other products




BOX-TOR-TOOL

Box set of tool for
Nitrile O-rings,
Extraction tools



M1

Worm and wheel set,
Hardened steel



CFC

Spring loaded position
switch, Electric
contact




HG8-ECO

Eco range Spur gear,
Steel C45



T10-BAR

T type tooth bar
stock, T10



GMC

Flat profile - Round
guide, Flat profile -
round guide



SUPCC

Self-centering
clamping hub steel,
With lock nut



SRG

Adjustable latch
clamp with strike
plate, Stroke from
77,3mm to 83mm



RJA00_28

Sealing strip, Clipping



T5M_T10M

T type timing belt per
metre, T5 Steel cored
polyurethane



GG1


Ground spur gear,
Heat treated steel



PLM-C


Cylindrical holding
magnets, Cylindrical
holding magnet

Complementary products



SBS_M

Single chain supplied
by the metre,
Stainless steel



RLR

Roll-Ring® chain
tensioner, Roll-Ring®
Self-adjusting



PCS375S

Chain sprocket -
Stainless steel, 9.525
(DIN 06B-1)