

Suction cup threaded insert

TM
CTM
CTF


Snap-on

- Threaded insert for suction cup
- Material: nickel brass


Female




Male



Assembly diagram




female



male



Assembly example

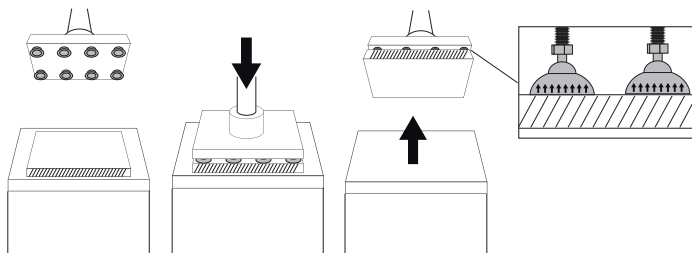

DISCOUNTS

Qty	1+	50+	100+	150+	200+
Disc.	List	-5%	-10%	-15%	On request

Part number	ØM	H	A/F	type	For suction cup	Stock*	Price each 1 to 49
TM5M5	M5	12,0	8	mâle	DFG05A, DFG06A, DFG08A, DFG10A, DCA05	✓	1,71 €
CTM10M5	M5	13,5	13	mâle	DCA11, DCA14, DCA16, DCA22, DCA25,	✓	1,71 €
CTM10G18 1/8»	19,5	13	mâle	DCG05C, DCG07C, DCG10, DCG12, DCG15,	✓	2,39 €	
CTF10G18 1/8»	18,5	13	femelle	DCG18, DCG20, DCG25	✓	2,21 €	

*Depending on availability - Dimensions in mm

Our other products



PSG055
Spur gear - precision range, Stainless steel 316



ZA
Shaft for linear guides, Hardened ground steel



CHTRP
Single and dual output gearboxes, Up to 34,5 Nm



RPCplss
Fixed castor with plate, Stainless steel - Polyamide




GGB
Female wing knob, With blind thread




YG1
HEAVY DUTY spur gear, Steel 35NCD6



PRF_PF
Anchoring bracket for aluminium profile, Anchor



CFC
Spring loaded position switch, Electric contact



M1
Worm and wheel set, Machined plastic (delrin)



PDM_PDV
Detectable plastic palm grip, by metal detectors



UCFL
Cast iron flanged bearing, Cast iron



SCH
Horizontal hook toggle clamp, Horizontal Hook clamp - steel

Complementary products



DCA
Suction cup, 1.5 bellows, nitrile



DCG
Suction cup, 2.5 bellows, natural rubber