

Suction cup threaded insert

TM
CTM
CTF


Snap-on

- Threaded insert for suction cup
- Material: nickel brass


Female




Male



Assembly diagram




female



male



Assembly example

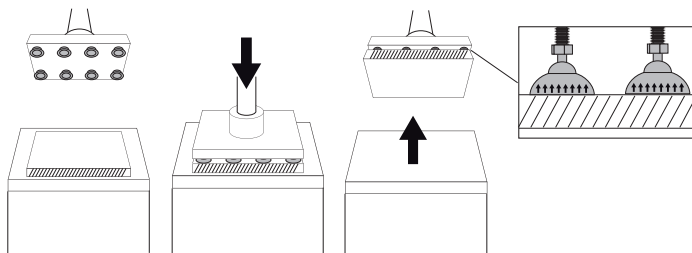

DISCOUNTS

Qty	1+	50+	100+	150+	200+
Disc.	List	-5%	-10%	-15%	On request

Part number	ØM	H	A/F	type	For suction cup	Stock*	Price each 1 to 49
TM5M5	M5	12,0	8	mâle	DFG05A, DFG06A, DFG08A, DFG10A, DCA05	✓	1,71 €
CTM10M5	M5	13,5	13	mâle	DCA11, DCA14, DCA16, DCA22, DCA25,	✓	1,71 €
CTM10G18	1/8»	19,5	13	mâle	DCG05C, DCG07C, DCG10, DCG12, DCG15,	✓	2,39 €
CTF10G18	1/8»	18,5	13	femelle	DCG18, DCG20, DCG25	✓	2,21 €

*Depending on availability - Dimensions in mm

Our other products



ZG1
Plastic spur gear,
Machined plastic
(delrin)



CMass
Eye bolt stainless
steel, Stainless steel



LWH
High rigidity linear
slide, Rail - from 9320
N to 71300 N



DOMI30
Accessories, Plate



LINK64
Synchronous AC
Motor and-gearbox ,
from 1.3 to 6Nm



CHM50
Worm and wheel gear
reducer, up to 107
Nm



TOC
Short swivel head,
Short



J66
Spur gear coaxial
gearbox, from 0.90 to
2.80 Nm - Inline



TBD
Manual leadscrew
table with opposing



UTKpwr
Utilitak® V rail, V rail



H4
Crossed helical gear
crossed axis at 90°,



PDD
Spring plunger, With
sensor adaptor

Complementary products



DCA
Suction cup, 1.5
bellows, nitrile



DCG
Suction cup, 2.5
bellows, natural
rubber