

Principle


This coupling eliminates misalignment with the simplicity and safety of a rubber tyre

Advantages

- Maintenance-free: no routine maintenance or lubrication required
- Designed for quick and easy installation and replacement of components without moving the hubs or realigning the driver or driven equipment, reducing downtime.
- High misalignment capabilities: compensates for extremely large angular, axial and radial misalignments
- Vibration dampening and shock absorption: due to its quick smoothing qualities, provides damping properties to the torsional vibration induced in the system by cyclic variation of the twisting moment and shocks induced by the fast load variation, protecting the entire system

Application

- For difficult alignments characteristics
- Ideal for applications with vibration and thermal expansion
- With high response to torque peaks and great shocks

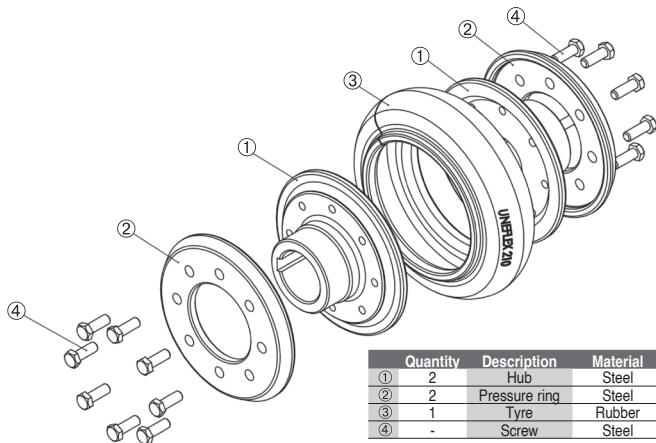

	Quantity	Description	Material
①	2	Hub	Steel
②	2	Pressure ring	Steel
③	1	Tyre	Rubber
④	-	Screw	Steel

- Rubber tyre coupling

- Eliminates misalignment with the simplicity and safety of a rubber tyre

Material

Hubs: steel

Tread: fabric-reinforced natural rubber


- Operating temperature: -20°C to +80°C

Info.

- Sold pre-bored, to be bored by yourself



NEW!

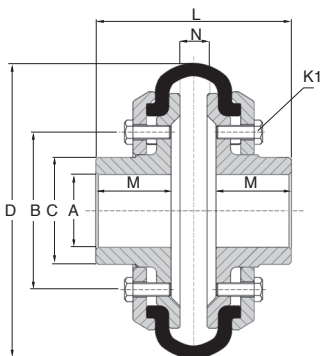

DISCOUNTS

Qty	1+	2+	4+
Disc.	List	-5%	On request

Part numbers	Misalignment							Relative damping	Moment of inertia (kg.m²)	Tightening torque screw K1 (Nm)
	Nominal torque (Nm)	Max torque (Nm)	Max speed (RPM)	Axial max (mm)	Radial max (mm)	Angular max (°)				
UFX2-203R	50	150	5000	1,00	0,75	2	1,2	0,0019	4	
UFX6-206R	100	300	5000	1,50	1,00	2	1,2	0,0043	6	
UFX16-210R	200	600	4000	2,00	1,30	2	1,2	0,124	15	
UFX40-214R	400	1200	4000	2,50	1,60	2	1,2	0,0347	20	
UFX63-218R	800	2400	3000	3,00	2,00	2	1,2	0,118	25	

Part numbers full coupling	ØD	ØB	ØC	ØA pilot bore	ØA max	L	M	N	K1	Mass (kg)	Price each
UFX2-203R	104	54	40	10	28	70	30	8	6xM6	1,15	249,80 €
UFX6-206R	136	68	55	10	38	110	45	8	8xM6	2,50	264,92 €
UFX16-210R	178	88	70	15	48	130	50	19	8xM8	5,40	354,72 €
UFX40-214R	210	116	92	15	65	160	65	20	12xM8	9,50	460,14 €
UFX63-218R	263	140	107	25	75	190	75	24	8xM12	17,50	805,56 €

Dimensions in mm

- **Tyre for UNEFLEX coupling**
- Replacement of the tyre without moving the machines
- Material
Fabric-reinforced natural rubber (R arrangement)

Assembly

To assemble the Uneflex coupling, mount the hubs ① together with the pressure rings ② on the shaft ends and align the system parts.

The distance between the hubs "N" must be the one indicated on the data sheet.





The tyre ③ is mounted on the coupling hubs, fitted to provide the smallest possible gap between its faces. For large couplings, before tightening the pressure rings, it is recommended to use clamping bands to fit the tyre.

The tyre is secured with the prescribed wrench torque by means of the pressure ring and the screws ④

The fixation must be always carried out tightening two diametrally opposite screws in cyclic order, retightening the bolts after the first tightening as the rubber settles.

For replacing the tyre, only loosen the screws, until the tyre can be withdrawn.

NEW !



DISCOUNTS

Qty	1+	2+	4+
Disc.	List	-5%	On request

Part numbers tyre only	For coupling UFX	Price each
TYRE-203R	UFX2-203R	53,63 €
TYRE-206R	UFX6-206R	62,49 €
TYRE-210R	UFX16-210R	70,01 €
TYRE-214R	UFX40-214R	87,68 €
TYRE-218R	UFX63-218R	115,28 €

Dimensions in mm

Selection procedure

In order to design a coupling for a system, the following equation is used to determine the rated torque T_N of the application:

$$T_N [\text{Nm}] = \frac{P_{\text{motor}} [\text{kW}]}{n [\text{rpm}]} \cdot 9549 \cdot S$$

T_N = Application rated torque [Nm]

n = Rated speed of engine [tr/min]

T_{MAX} = Application peak torque [Nm]

S = Service factor

P = Rated power of drive [kW]

The permissible rated torque T_{KN} of the coupling has to correspond at least to the rated torque T_N of the application.

The permissible maximum torque $T_{K\text{MAX}}$ of the coupling has to correspond at least to the peak torque T_{MAX} of the application.

Check that the coupling can accommodate required bores and rated speed.

Service factor

The service factor S is obtained according to the following table, from the driver type of motor and the driven machine group in which the coupling will be installed

Driver motor type	Driven machine group No.				
	I	II	III	IV	V
Electric motor	1,0	1,5	2,0	2,5	3,0
Steam turbine					
Gas machine	1,5	2,0	2,5	3,0	3,2
Hydraulic turbine					
Diesel 4-6 cylinders					
Diesel 2-3 cylinders	2,2	2,5	2,8	3,2	3,5
4 Stroke motor					
Diesel 1-2 cylinders	2,6	2,8	3,0	3,5	4,0

Group I: Continual load machines: such as generators, small fans

Group II: Variable load machines: such as small elevators, generators, winches

Group III: Normal size to heavy machinery: such as mechanical mixers, cutters, brick presses

Group IV: Heavy machinery: such as dredge control mechanism, sand and paper grinders, compound mills

Group V: Heavy machinery of variable power consumption such as large drilling installations, roller tables for mills

Torque and misalignment



Axial



Angular



Radial



Damping

Storage and maintenance

In order to ensure a long-life cycle of the rubber element, it is fundamental to store the tyre protecting it against ozone, light (specially ultra violet rays), heat and oxygen, in a room with a relative humidity of less than 65% with a storage temperature range between +10°C and +25°C and without storing in the same room disinfectants, acids, chemicals and other similar substances that may cause a depreciation of the tyres.

Further details of the guideline for rubber product storage can be found in the standard ISO 2230. The coupling design allows a perfect inspection of the transmission tyre without dismantling the coupling, so a periodical visual inspection is recommended.

Our other products



B3PAN
Panamech, Multi-
Beam stainless steel,
Stainless steel - with
clampin...



BEAS
Star shaped anti-
static handle, Star,
anti-static



PRF_PA
Angle plate for
aluminium profile,
Adjustable plate



LVT
Miniature motorised
actuator 4A, 4 ampers



SSB
Stainless steel bevel
gear, 1:1



PRF_BV
Screw block, Panel
addition and fastening



AFA
Locking pin, with ring



PLM-20SC
Threaded cylindrical
magnet, With
threaded hole




BDP2R
Adjustable support
arm, Increased grip



RVM14
Manual worm and
wheel gearbox,



GLT3-76
Telescopic drawer,



G1
Steel spur gear, Steel
20NCD2

Complementary products



UFX
Uneflex® elastic
coupling, range