


For  $\text{Ø}32$  actuators  
ISO 15552 (VDMA 24562)

## UGH50


- Guide system for standard pneumatic actuators
- Fitted with 4 smooth bronze bearings
- Slides protected by wiper joints
- Actuator coupling supplied
- Fixing holes conform to CNOMO standards
- Supplied with 4 fixing screws for actuator
- Maintenance free
- Working temperature: +5°C to +80°C
- Maximum speed: 1 m/s
- Maximum loads : See end of section

Accurate even for long strokes

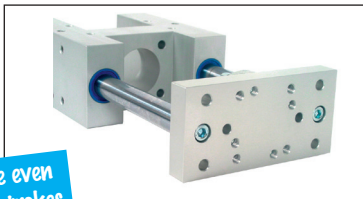

### Material

- Body + face plate: anodised aluminium
- Couplings + screws: Zinc plated steel
- Guide shafts: Chromed steel

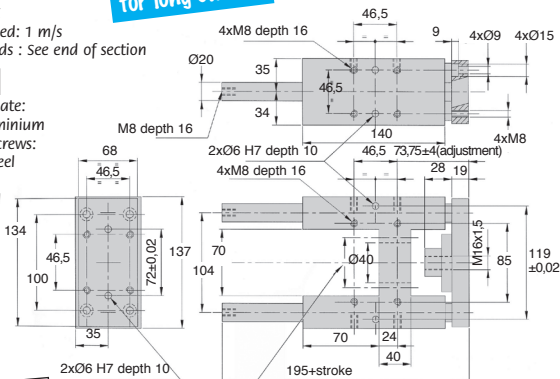

**QUICK DELIVERY**

Attach cylinder using 4 off M6 screws on  $\text{Ø}46.5$

### DISCOUNTS

Qty	1+	2+
Disc.	List	On request

Part number	Stroke (mm)	Actuator $\text{Ø}$ (mm)	Guide rod $\text{Ø}$ (mm)	Weight (kg)	Price each
UGH50-25	25	50	20	3,82	317,99 €
UGH50-50	50	50	20	3,94	320,23 €
UGH50-100	100	50	20	4,18	324,74 €
UGH50-160	160	50	20	4,47	330,17 €
UGH50-200	200	50	20	4,66	333,76 €
UGH50-250	250	50	20	4,90	338,28 €
UGH50-320	320	50	20	5,24	344,58 €
UGH50-400	400	50	20	5,62	351,78 €
UGH50-500	500	50	20	6,10	360,83 €
UGH50-600	600	50	20	6,58	369,81 €

Dimensions in mm

## Our other products



NCT

Square tube connector, Fixed angle



GLT3E-58

Telescopic drawer,



MBEX

Hexagonal ended handle, Hexagonal ended handle



BCFH

Mushroom headed button Hygienic Usit®, With male thread and high head



PRF\_PL\_4590

Joining plate for aluminium profile, joint plate - 45x90 mm



TBbutee

Axial thrust bearing, Steel balls



PSG3

Spur gear - precision range, Pre-hardened Steel 35NCD6



KB\_WW

Closed linear precision bearing, Economy range



PRF\_BASE

Base plate for aluminium profile, Base plate



CHARcav

Spring hinge, to install



PV2R

Adjustable suction-cup support, Increased grip



UTKswcr

Utilitrak® 3 wheels carriage, Steel roller carriage

Complementary products