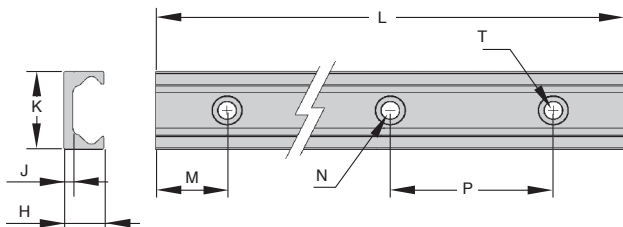


- Used with UTK-PW Series V wheel carriage assemblies
- U shaped aluminium alloy (6063-T6) channel
- Lightweight
- Tolerance on length +/-2mm

**Option**

- Increased length, max 3600mm


**DISCOUNTS**

Qty	1+	2+	4+
Disc.	List	-10%	On request

Part number	H	J	K	L	M	N Ø x depth (counterbore)	T (Ø hole)	P	Rail weight (kg/m)	Carriage weight (g)	Stock*	Price each
											✓	€
UTK0-PWR	11,0	4,0	20	1000	20	8,3 x 3	4,8	80	0,30	46	-	100,47 €
UTK1-PWR	15,0	4,0	26	1000	20	9,8 x 2,8	5,8	80	0,50	92	✓	109,53 €
UTK2-PWR	19,7	4,5	40	1000	20	14,3 x 3	8,8	80	0,93	243	✓	159,98 €

\*Depending of availability - Dimensions in mm

## Our other products



Slat top chain acetal,  
Large range 821



Hypoid gearbox -  
Stainless steel, up to  
130 Nm



Worm and wheel set,  
Non hardened steel



Flat magnet, Flat  
magnet with thread



Chain sprocket with  
hardened teeth,  
19.05mm (DIN12B-1)



Base plate for  
economic mini-table,  
Allows X-Y cross  
tables



Curved track for slat  
top chain, Ranges 880  
and 881



Stainless steel  
cylindrical elasto  
mount, Stainless steel



Pull handle - Multi-  
sector, Tapped  
recessed insert



Extension springs  
DIN2097, DIN 2097



Anti-vibration  
machine mount, Oval  
base plate



Flexible Bellows  
coupling, Aluminium  
and Bronze - with  
clamping jaw

## Complementary products



Utilitrak® 3 wheels  
carriage, Polymer  
series V wheels



V shaped channel  
UtiliTrak®, V rail



Utilitrak® 3 wheels  
carriage, Polymer  
series V wheels