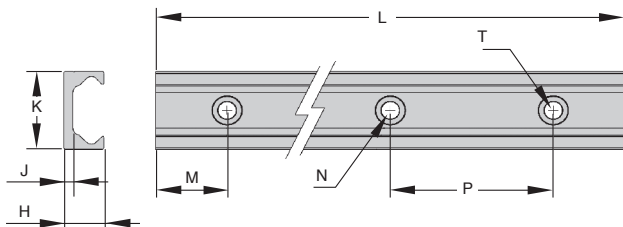


- Used with UTK-PW Series V wheel carriage assemblies
- U shaped aluminium alloy (6063-T6) channel
- Lightweight
- Tolerance on length +/-2mm

Option

- Increased length, max 3600mm


DISCOUNTS

Qty	1+	2+	4+
Disc.	List	-10%	On request

Part number	H	J	K	L	M	N Ø x depth (counterbore)	T (Ø hole)	P	Rail weight (kg/m)	Carriage weight (g)	Stock*	Price each
											✓	€
UTK0-PWR	11,0	4,0	20	1000	20	8,3 x 3	4,8	80	0,30	46	-	100,47 €
UTK1-PWR	15,0	4,0	26	1000	20	9,8 x 2,8	5,8	80	0,50	92	✓	109,53 €
UTK2-PWR	19,7	4,5	40	1000	20	14,3 x 3	8,8	80	0,93	243	✓	159,98 €

*Depending of availability - Dimensions in mm

Our other products



BOX-TOR-D

Box set of Nitrile O-rings in nitrile, 18.00 x 2.00mm to 50.00 x 5.00



NT62

Spur gear coaxial gearbox, from 6 to 18 Nm - Inline



CHCSS

Socket headed screw, Stainless steel - A2



PRF_CHA

Hinge for aluminium profile, Surface mounting hinge



SH0

Parallel axis helical gear, Steel 20NCD2



RLR

Roll-Ring® chain tensioner, Roll-Ring® Self-adjusting



CFF_SS

Female rod ends DIN ISO12240-4, Stainless steel / bronze - Economy r...



RIMtce

Locking castor, with central hole



PW_PWG05

Worm - precision range, Steel



CNA-CNG

Right angled mounting plate, Right



NPR

Reflector support,



PLM-C

Flat gripping magnet, Flat holding magnet

Complementary products



UTKpwc

Utilitrak® 3 wheels carriage, Polymer series V wheels



UTKpwrr

V shaped channel UtiliTrak®, V rail



UTKpwc

Utilitrak® 3 wheels carriage, Polymer series V wheels