





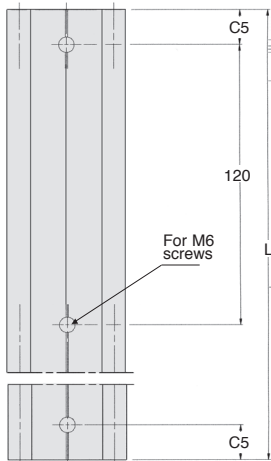


- Material: hard anodised aluminium
- Standard length: 1000mm
- Option:** Other lengths available (up to 4000mm)
- For **WJUM10** and **WJRM10** bearing blocks

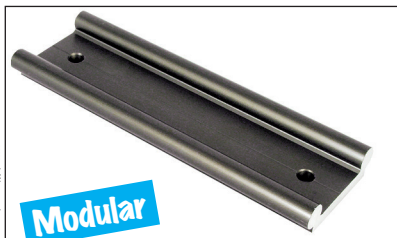

WS10



WS10-40

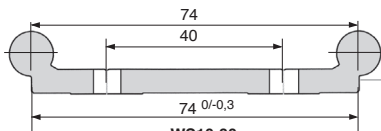

WS10-80

DISCOUNTS

Qty	1+	5+	10+	15+	20+
Disc.	List	-10%	-15%	-20%	On request

Part number	Length L (mm)	Max. length L (mm)	C5 mini	C5 maxi	Iy (mm ⁴)	Iz (mm ⁴)	Wby (mm ³)	Wbz (mm ³)	Weight (kg/m)	Stock ¹	Price each 1 to 4
WS10	1000	4000	20	79,5	19000	2850	1000	310	0,62	✓	70,03 €
WS10-40	1000	4000	20	79,5	91000	5100	3600	590	1,00	✓	102,89 €
WS10-80	1000	4000	20	79,5	388000	6100	9200	650	1,50	✓	171,38 €

¹Depending on availability - Dimensions in mm

Our other products



CHMR75
Worm and wheel gear reducer, up to 298 Nm



DFG
Flat suction cup, nitrile



PRF_CHA_D
Hinge and joint, Lift-off hinge



BABTV
Ball lock pins lockable, Stainless steel



RT25
Self-centering flanged locking assembly, Medium/high torque



PLA
Flat magnet, Flat magnet



HW_HT
Half-rail guide, Wheel




JCDss
Double universal joint - Stainless steel, Low duty



RPCplss
Swivel castor with double brake,



BLHB30
Right angled gearbox, bored shafts, up to



LAT4
4A motorised linear actuator, 4 amperes



GE
Toggle latches, Miniature

Complementary products



WJUM10
Drylin® W bearing block, Slide



WW10
Drylin® W slide, slide assembly



WJRM
Drylin® W hybrid bearing block, Hybrid bearings