
Machined plastic bevel gear

Delrin

Ratio

2:1
3:1
4:1

- ***Module 0.8 to 2.5***
- *Machined parts*
- *Pressure angle 20°*
- *Teeth Gleason*
- *Material:*
  Delrin plastic
- *Working temp. -50° to +80°C*

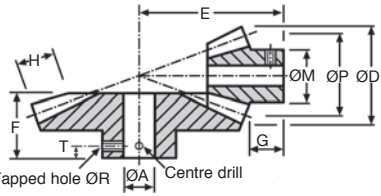



TORQUE AND POWER INDICATION	For 20 teeth at 1000 rpm					
	2.5 MOD	2.0 MOD	1.5 MOD	1.25 MOD	1.0 MOD	0.8 MOD
Torque (Nm)	0.91	0.46	0.20	0.15	0.12	0.03
Power (kW)	0.09	0.05	0.02	0.016	0.013	0.003

DISCOUNTS

Qty	1+	6+	30+
Disc.	List	-22%	On request

Part number	Teeth Z	Module	ØP	E	ØD	ØA	ØM	F	G	H	ØR	T	Price each 1 to 5
ZDB0.8-15	15	0,8	12,00	20,00	13,93	6	10	11,90	7,50	4,02	M3	3,50	16,99 €
ZDB0.8-30	30		24,00	14,00	24,64	8	20	10,08	5,50	4,02	M3	3,50	20,09 €
ZDB1-15	15	1	15,00	24,00	17,42	8	14	13,87	8,76	5,03	M4	4,00	19,28 €
ZDB1-30	30		30,00	18,00	30,58	10	25	13,11	7,00	5,03	M4	4,00	23,70 €
ZDB1.5-15 **2:1**	15	1,5	22,50	35,00	26,12	10	21	19,84	12,13	7,55	M4	5,00	26,74 €
ZDB1.5-30 **2:1**	30		45,00	27,00	45,87	10	30	19,66	11,00	7,55	M4	5,00	26,90 €
ZDB2-15	15	2	30,00	45,00	34,83	12	28	24,76	14,86	10,06	M5	7,50	23,24 €
ZDB2-30	30		60,00	35,00	61,16	12	40	25,21	14,00	10,06	M5	8,00	32,33 €
ZDB2.5-15	15	2,5	37,50	54,00	43,54	15	32	29,51	16,51	13,53	M5	8,00	31,81 €
ZDB2.5-30	30		75,00	41,50	76,45	15	50	29,31	13,31	13,53	M5	7,00	40,22 €
ZTB0.8-15	15	0,8	12,00	28,00	14,14	6	10	15,63	9,67	5,69	M3	5,00	On request
ZTB0.8-45	45		36,00	20,00	36,30	8	28	16,07	8,00	5,69	M3	4,00	
ZTB1-15 **3:1**	15	1	15,00	32,00	17,67	8	13	16,54	9,18	7,12	M4	4,50	
ZTB1-45 **3:1**	45		45,00	24,00	45,37	10	40	19,09	10,00	7,12	M4	5,00	
ZTB1.5-15	15	1,5	22,50	45,00	26,51	10	18	21,80	10,51	10,67	M4	5,00	
ZTB1.5-45	45		67,50	32,00	68,06	15	50	24,63	12,00	10,67	M4	6,00	
ZFB0.8-15	15	0,8	12,00	35,00	14,23	6	10	18,07	10,58	7,10	M3	5,00	
ZFB0.8-60	60		48,00	20,00	48,22	8	30	15,98	8,00	7,10	M3	4,00	
ZFB1-15 **4:1**	15	1	15,00	45,00	17,79	8	13	24,22	14,73	9,28	M4	7,00	
ZFB1-60 **4:1**	60		60,00	30,00	60,27	10	40	25,08	12,00	9,28	M4	6,00	
ZFB1.5-15	15	1,5	22,50	60,00	26,69	10	18	28,82	12,08	13,91	M4	6,00	
ZFB1.5-60	60		60,00	35,00	90,41	15	50	27,61	12,00	13,91	M4	6,00	

Dimensions in mm

Our other products


PML

Solid foot mount for heavy loads, Ø 100, 120 or 150


CABPVC

PVC covered galvanised steel cable, Galvanised steel with


PSG05HC

Skive hobbed spur gears - precision range, Case hardened steel 20NCD2


CHAPAMss

Weld-on hinge with flat end, Stainless steel or Aluminium


CSS

Spherical bushing, Steel / self lubricating steel


HD

Double needle roller universal joint, Heavy duty


SVT30

Screwjack with travelling screw, with translating screw


CHMX_CHMDX

Shaft for worm and wheel reducer CHMR and CHM, CHMR and CHM gearboxe...


PRF_ROUL_

Castor for aluminium profile, No brake


SHW

Plain washer, A2 Stainless steel


NSA

Adjustable clamp, Articulated


DEP

Tools Hygienic Usit® and Hygienic Design®, Protective insert for s...

Complementary products


MDB_MTB

Moulded plastic bevel gear (nylon), 2:1


SSDB

Stainless steel bevel gear, 2:1