


Delrin

Ratio
2:1
3:1
4:1

- Module 0.8 to 2.5
- Machined parts
- Pressure angle 20°
- Teeth Gleason
- Material:
Delrin plastic
- Working temp. -50° Tapped hole ØR to +80°C

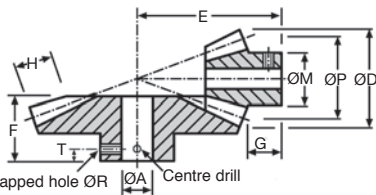

TORQUE AND POWER INDICATION	For 20 teeth at 1000 rpm					
	2.5 MOD	2.0 MOD	1.5 MOD	1.25 MOD	1.0 MOD	0.8 MOD
Torque (Nm)	0.91	0.46	0.20	0.15	0.12	0.03
Power (kW)	0.09	0.05	0.02	0.016	0.013	0.003

DISCOUNTS

Qty	1+	6+	30+
Disc.	List	-22%	On request

Part number	Teeth											Price each	
	Z	Module	ØP	E	ØD	ØA	ØM	F	G	H	ØR	T	1 to 5
ZDB0.8-15	15	0,8	12,00	20,00	13,93	6	10	11,90	7,50	4,02	M3	3,50	16,99 €
ZDB0.8-30	30		24,00	14,00	24,64	8	20	10,08	5,50	4,02	M3	3,50	20,09 €
ZDB1-15	15	1	15,00	24,00	17,42	8	14	13,87	8,76	5,03	M4	4,00	19,28 €
ZDB1-30	30		30,00	18,00	30,58	10	25	13,11	7,00	5,03	M4	4,00	23,70 €
ZDB1.5-15	15	1,5	22,50	35,00	26,12	10	21	19,84	12,13	7,55	M4	5,00	26,74 €
ZDB1.5-30	30		45,00	27,00	45,87	10	30	19,66	11,00	7,55	M4	5,00	26,90 €
ZDB2-15	15	2	30,00	45,00	34,83	12	28	24,76	14,86	10,06	M5	7,50	23,24 €
ZDB2-30	30		60,00	35,00	61,16	12	40	25,21	14,00	10,06	M5	8,00	32,33 €
ZDB2.5-15	15	2,5	37,50	54,00	43,54	15	32	29,51	16,51	13,53	M5	8,00	31,81 €
ZDB2.5-30	30		75,00	41,50	76,45	15	50	29,31	13,31	13,53	M5	7,00	40,22 €
ZTB0.8-15	15	0,8	12,00	28,00	14,14	6	10	15,63	9,67	5,69	M3	5,00	On request
ZTB0.8-45	45		36,00	20,00	36,30	8	28	16,07	8,00	5,69	M3	4,00	
ZTB1-15	15	1	15,00	32,00	17,67	8	13	16,54	9,18	7,12	M4	4,50	
ZTB1-45	45		45,00	24,00	45,37	10	40	19,09	10,00	7,12	M4	5,00	
ZTB1.5-15	15	1,5	22,50	45,00	26,51	10	18	21,80	10,51	10,67	M4	5,00	
ZTB1.5-45	45		67,50	32,00	68,06	15	50	24,63	12,00	10,67	M4	6,00	
ZFB0.8-15	15	0,8	12,00	35,00	14,23	6	10	18,07	10,58	7,10	M3	5,00	
ZFB0.8-60	60		48,00	20,00	48,22	8	30	15,98	8,00	7,10	M3	4,00	
ZFB1-15	15	1	15,00	45,00	17,79	8	13	24,22	14,73	9,28	M4	7,00	
ZFB1-60	60		60,00	30,00	60,27	10	40	25,08	12,00	9,28	M4	6,00	
ZFB1.5-15	15	1,5	22,50	60,00	26,69	10	18	28,82	12,08	13,91	M4	6,00	
ZFB1.5-60	60		60,00	35,00	90,41	15	50	27,61	12,00	13,91	M4	6,00	

Dimensions in mm

Our other products



M1

Worm and wheel set,
Hardened steel



AT5M AT10M

AT type timing belt
per metre, AT10 Steel
cored polyurethane



RPCtcss

Swivel castor with
central hole, Stainless
steel - Polyamide -
with ...



CDR

Retaining cable for
ball pin, Retaining
cable




PSG1

Spur gear - precision
range, Case hardened
steel 20NCD2



SLVlok

Vertical toggle clamp,
Vertical toggle clamp /
vertical foot



RPPM

RPP type belt per
metre, RPP8 Steel
cored polyurethane



VQTplqn

Quarter-turn clamp
lock - Clamping plate,
Flush mounting



PMC48_M8

Anti-vibration
machine mount, Oval



DOMI50

Connecting kits, XZ
linking kit



GLB

Small 6 lobe threaded
handle - female,



CDGamme

Compression spring
DIN2095, DIN 2095

Complementary products



SSDB

Stainless steel bevel
gear, 2:1



DB

Steel bevel gear, 2:1