


Delrin

Ratio  
2:1  
3:1  
4:1

- Module 0.8 to 2.5
- Machined parts
- Pressure angle 20°
- Teeth Gleason
- Material:  
Delrin plastic
- Working temp. -50° Tapped hole ØR to +80°C

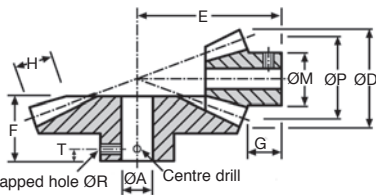

TORQUE AND POWER INDICATION	For 20 teeth at 1000 rpm					
	2.5 MOD	2.0 MOD	1.5 MOD	1.25 MOD	1.0 MOD	0.8 MOD
Torque (Nm)	0.91	0.46	0.20	0.15	0.12	0.03
Power (kW)	0.09	0.05	0.02	0.016	0.013	0.003

## DISCOUNTS

Qty	1+	6+	30+
Disc.	List	-22%	On request

Part number	Teeth											Price each	
	Z	Module	ØP	E	ØD	ØA	ØM	F	G	H	ØR	T	1 to 5
ZDB0.8-15	15	0,8	12,00	20,00	13,93	6	10	11,90	7,50	4,02	M3	3,50	16,99 €
ZDB0.8-30	30		24,00	14,00	24,64	8	20	10,08	5,50	4,02	M3	3,50	20,09 €
ZDB1-15	15	1	15,00	24,00	17,42	8	14	13,87	8,76	5,03	M4	4,00	19,28 €
ZDB1-30	30		30,00	18,00	30,58	10	25	13,11	7,00	5,03	M4	4,00	23,70 €
ZDB1.5-15	15	1,5	22,50	35,00	26,12	10	21	19,84	12,13	7,55	M4	5,00	26,74 €
ZDB1.5-30	30		45,00	27,00	45,87	10	30	19,66	11,00	7,55	M4	5,00	26,90 €
ZDB2-15	15	2	30,00	45,00	34,83	12	28	24,76	14,86	10,06	M5	7,50	23,24 €
ZDB2-30	30		60,00	35,00	61,16	12	40	25,21	14,00	10,06	M5	8,00	32,33 €
ZDB2.5-15	15	2,5	37,50	54,00	43,54	15	32	29,51	16,51	13,53	M5	8,00	31,81 €
ZDB2.5-30	30		75,00	41,50	76,45	15	50	29,31	13,31	13,53	M5	7,00	40,22 €
ZTB0.8-15	15	0,8	12,00	28,00	14,14	6	10	15,63	9,67	5,69	M3	5,00	On request
ZTB0.8-45	45		36,00	20,00	36,30	8	28	16,07	8,00	5,69	M3	4,00	
ZTB1-15	15	1	15,00	32,00	17,67	8	13	16,54	9,18	7,12	M4	4,50	
ZTB1-45	45		45,00	24,00	45,37	10	40	19,09	10,00	7,12	M4	5,00	
ZTB1.5-15	15	1,5	22,50	45,00	26,51	10	18	21,80	10,51	10,67	M4	5,00	
ZTB1.5-45	45		67,50	32,00	68,06	15	50	24,63	12,00	10,67	M4	6,00	
ZFB0.8-15	15	0,8	12,00	35,00	14,23	6	10	18,07	10,58	7,10	M3	5,00	
ZFB0.8-60	60		48,00	20,00	48,22	8	30	15,98	8,00	7,10	M3	4,00	
ZFB1-15	15	1	15,00	45,00	17,79	8	13	24,22	14,73	9,28	M4	7,00	
ZFB1-60	60		60,00	30,00	60,27	10	40	25,08	12,00	9,28	M4	6,00	
ZFB1.5-15	15	1,5	22,50	60,00	26,69	10	18	28,82	12,08	13,91	M4	6,00	
ZFB1.5-60	60		60,00	35,00	90,41	15	50	27,61	12,00	13,91	M4	6,00	

Dimensions in mm

## Our other products



TFR  
Rigid manual  
tensioner, Fixed



GCL  
Linear ball slide Eco  
Range, economy  
range




CTss  
Universal joint,  
telescopic, Inox, Light  
duty



PTRSS  
Idler chain sprocket,  
For hostile  
environments



WTM  
Tightening washer -  
DIN6340, Steel



GPLny  
Brush, nylon



M0  
Worm and wheel set,  
Hardened steel




BPFR  
Ball transfer unit push  
fit, Heavy



EMS  
Stainless steel knurled  
thumb nut, Knurled



UGH50  
H Type Guide units,  
For Ø50 actuators



IN1  
Internal gear,  
Machined plastic



BPTR  
End cap for round  
tube, Standard

## Complementary products



SSDB  
Stainless steel bevel  
gear, 2:1



DB  
Steel bevel gear, 2:1