





- Suitable for most applications due to the use of self lubricating bronze bearings in the end connectors
- Allows the driving and driven elements to be mounted apart
- Obstacles can be avoided, multiple bends possible
- Position of the driven element is no longer determined by the position of the driving equipment
- Output efficiency >95%
- Dampens vibration
- Woven wire flexible shaft
- Materials:
 - Wires: blackened XC25 steel
 - Sheath: PVC

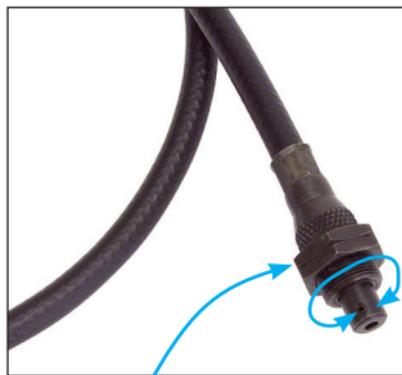

standard end
(with 2 locknuts)

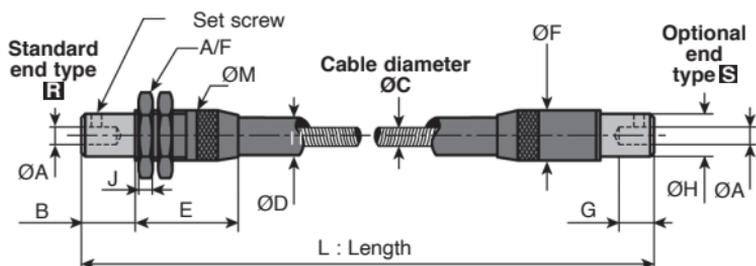

Dark grey areas are fixed parts.
Light grey areas are revolving parts.

Part number	ØC core	ØM	ØA	B	ØD	E	A/F	ØF	G	ØH	J	Screw
FDSQ4-L	3,80	M15x1,0	4	10	10,5	43	22	15,0	8	12,5	4	M3
FDSQ5-L	4,75	M18x1,0	5	16	14,0	50	24	18,0	12	15,5	4	M3
FDSQ6-L	6,35	M21x1,0	6	17	17,0	59	27	21,0	14	18,5	4	M4
FDSQ8-L	8,00	M22x1,5	8	23	17,5	63	30	22,0	17	18,5	4	M4
FDSQ9-L	9,52	M26,5x1,5	10	25	22,5	69	35	26,5	20	23,0	4	M5
FDSQ13-L	12,70	M29,5x1,5	15	31	25,0	84	36	29,5	24	26,0	4	M6


Dimensions in mm

Info.



- Replace the "L" in the part number by the length required and add the desired end (R: standard; S: optional)
E.g. **FDSQ4A-500RR**
- Steel core lubricated with oil
- For continuous use, the shaft should be lubricated every 3 months
- Flexible shaft can be removed by unscrewing the knurled part. Check the sealing before re-use
- Delivered pre-bored
- The one-direction versions are no longer available

NOTE: For assembly, the end must be drilled and pinned to the connected shaft. The set screw is only there for positioning. It does not allow torque to be transmitted.

BEND RADIUS
Radius = $\frac{a^2 + b^2}{4b}$ (mm)

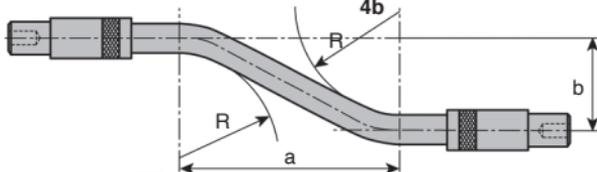

Depending on the sense of shaft rotation, the braiding may be different.

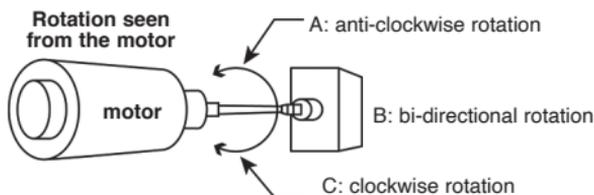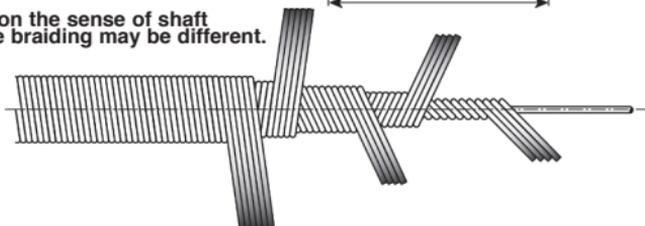


"L" in part number refers to length, see info.

Part number	Price for 500 mm	Price for 1000 mm	Price for 1500 mm	Price for 2000 mm	Price for 2500 mm	Price for 3000 mm
FDSQ4B-L	On request	On request	On request	On request	On request	On request
FDSQ5B-L						
FDSQ6B-L						
FDSQ8B-L						
FDSQ9B-L						
FDSQ13B-L						


Dimensions in mm



- Ball bearings in the end connectors allow for a higher speed of rotation and more intensive use.
- Allows the driving and driven elements to be mounted apart
- Obstacles can be avoided, multiple bends possible
- Position of the driven element is no longer determined by the position of the driving equipment
- Output efficiency >95%
- Dampens vibration
- Woven wire flexible shaft
- Materials:
 - Wires: blackened XC25 steel
 - Sheath: PVC

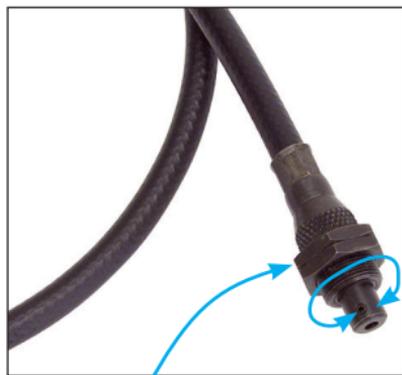

standard end
(with 2 locknuts)

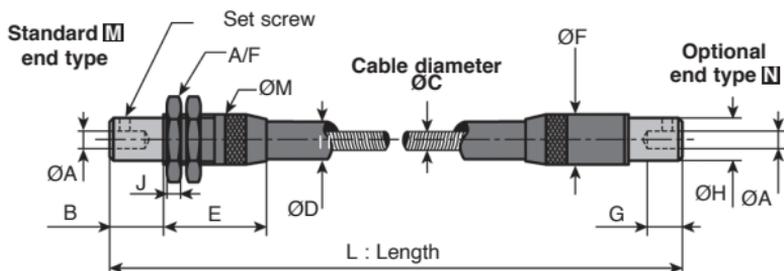

Dark grey areas are fixed parts.
Light grey areas are revolving parts.


Part number	ØC		ØA	B	ØD	E	A/F	ØF	G	ØH	J	Screw
	core	ØM										
FDS4-L	3,80	M18 x 1,0	4	11,0	10,5	48,0	24	18	8	10,75	4	M3
FDS5-L	4,75	M21 x 1,0	5	14,5	14,0	59,0	27	21	12	14,00	4	M3
FDS6-L	6,35	M27 x 1,0	6	19,5	17,0	66,5	35	27	14	18,00	4	M4
FDS8-L	8,00	M30 x 1,5	8	24,0	17,5	68,5	36	30	17	20,50	4	M4
FDS9-L	9,52	M34 x 1,5	10	25,0	22,5	78,5	41	34	20	24,50	4	M5
FDS13-L	12,70	M38 x 1,5	15	26,5	25,0	85,5	46	38	24	28,00	4	M6
FDS16-L	16,00	M44 x 1,5	16	30,0	32,0	108,5	55	44	25	31,00	4	M6
FDS19-L	19,05	M50 x 1,5	16	31,0	31,0	114,0	60	50	25	36,50	4	M6

Dimensions in mm

Info.

- Replace the "L" in the part number by the length required and add the desired end (M: standard; N: optional)
E.g. **FDS4-500MM**
- Steel core lubricated with oil
- For continuous use, the shaft should be lubricated every 3 months
- Flexible shaft can be removed by unscrewing the knurled part. Check the sealing before re-use
- Delivered pre-bored
- The one-direction versions are no longer available

NOTE: For assembly, the end must be drilled and pinned to the connected shaft. The set screw is only there for positioning. It does not allow torque to be transmitted.

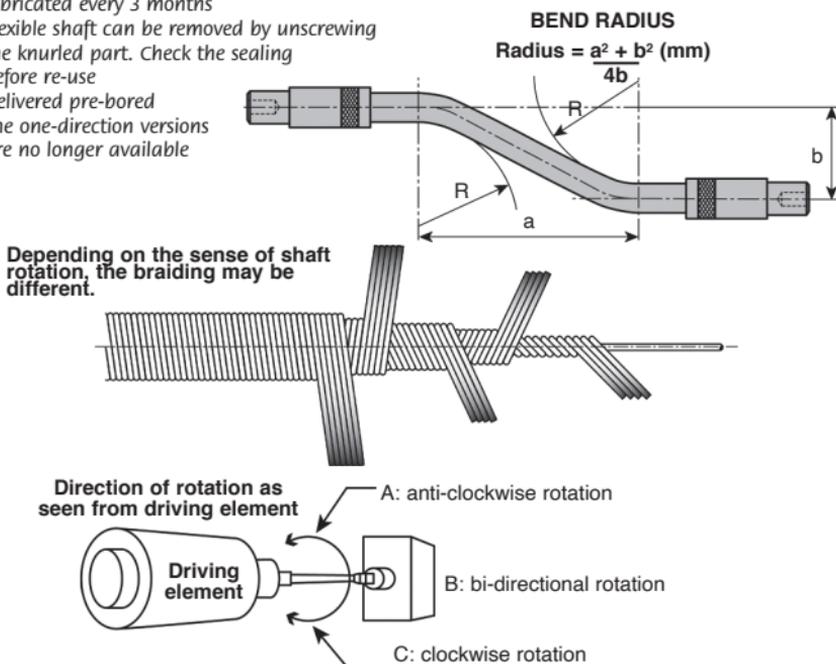

"L" in part number refers to length, see **info**.

Part number	Price for 500 mm	Price for 1000 mm	Price for 1500 mm	Price for 2000 mm	Price for 2500 mm	Price for 3000 mm
FDS4B-L	On request	On request	On request	On request	On request	On request
FDS5B-L						
FDS6B-L						
FDS8B-L						
FDS9B-L						
FDS13B-L						
FDS16B-L						
FDS19B-L						

Dimensions in mm