

Flush fitting ball transfer unit

For light loads

BPLE

- **Pressed steel ball transfer unit**
- Push fit for rapid installation & replacement where only single-sided access to the mounting surface is available
- For light loads
- Housing made from pressed steel
- With drainage hole and felt seal
- Orientation: horizontal with ball upwards
- Max. speed: 1m/s
- Working temperature range: -20 to +70°C
- Materials:


BPL : galvanised steel body and steel balls

BPL/SS : stainless steel body and stainless steel 420 balls



Advantages

- Optional clips compensate for irregularities in seat bore diameter

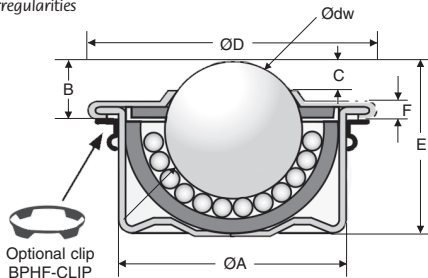

DISCOUNTS

Qty	1+	6+	20+	40+	60+
Disc.	Net	-10%	-15%	-20%	On request

Part N°	Ødw ball	ØA	B	C	ØD	E	F	Carrying capacity (kg)	Weight (g)	Stock*	Price each
											1 to 5
Steel body, steel balls											
BPLE15-24	15	24	9,5	4,6	31	21,0	2,8	60	0,041	✓	3,63 €
BPLE22-36	22	36	9,8	3,9	45	29,5	2,9	160	0,128	✓	6,67 €
BPLE30-45	30	45	13,8	6,8	55	37,0	3,6	280	0,253	✓	10,08 €
BPLE45-62	45	62	19,0	9,0	75	53,5	4,0	600	0,720	-	48,86 €
Stainless steel body, stainless steel balls											
BPLE15-24/SS	15	24	9,5	4,6	31	21,0	2,8	40	0,039	✓	11,23 €
BPLE22-36/SS	22	36	9,8	3,9	45	29,5	2,9	90	0,125	✓	14,35 €
BPLE30-45/SS	30	45	13,8	6,8	55	37,0	3,6	200	0,271	✓	24,41 €
BPLE45-62/SS	45	62	19,0	9,0	75	53,5	4,0	260	0,710	-	117,92 €

*Depending on availability - Dimensions in mm

Our other products



RTE

Rotex®, jaw coupling,
Aluminium




CHA135

Screwed hinge, 135
degrees



BPPL

Assembly tool for
carrier ball, Mounting
tool



MBronnelle

Stop washer, Stop
washer MB



DOMI80

Connecting kits, XZ
linking kit



PSEC

Security pull handle,
Thermoplastic



DER71

Stainless steel AC
asynchronous motor
0.25 à 0.37kW, 0.25
to 0.37kW



WING

Manually tightened
wing nut, Steel (ANSI
B18-17)




PGNT

Thermoplastic T
handle, With threaded
spindle



STRIP1000

Sealing brush strip,
1m length



CHN_CHNSS

Straight long link
stainless steel chain,
Stainless steel



AT5M AT10M

AT type timing belt
per metre, AT10 Steel
cored polyurethane

Complementary products



BPL

Ball transfer unit light
duty, Light



BPLE

Ball transfer unit push
fit, Light



BPLF

Ball transfer unit light
duty, Light



BPHF

Ball transfer unit push
fit, Heavy