


With Nylon lock washer

EAR


- Self locking nut
- Lock nut with an internal Nylon ring that when in contact with the internal thread produces a restraining force
- Metric thread
- Materials:
 - Steel
 - Nylon internal ring

Advantages

- Economical
- Vibration resistant
- Can be re-used



NEW!
With a
Nylon ring

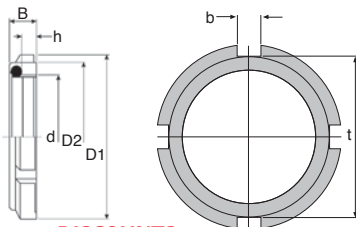

DISCOUNTS

Qty	1+	6+	20+	40+	60+
Disc.	List	-10%	-15%	-20%	On request

Part number	Thread	Ød	B	h	ØD1	ØD2	b	t	Price each 1 to 5
EAR10-075	M10x0.75		7,6	4,4	18	14	3	14	2,13 €
EAR12-100	M12x1		7,6	4,4	21	18	3	18	2,31 €
EAR15-100	M15x1		8,6	5,2	24	21	4	21	2,66 €
EAR17-100	M17x1		8,6	5,2	28	24	4	24	3,12 €
EAR20-100	M20x1		9,6	6,0	32	27	4	27	3,58 €
EAR25-150	M25x1,5		10,5	6,0	38	33	5	33	4,85 €
EAR30-150	M30x1,5		10,7	6,6	44	38	5	38	6,41 €
EAR35-150	M35x1,5		11,3	6,6	50	44	5	44	7,87 €
EAR40-150	M40x1,5		12,3	7,5	56	50	6	50	10,29 €
EAR45-150	M45x1,5		12,3	7,5	62	55	6	55	13,89 €
EAR50-150	M50x1,5		12,9	7,6	68	61	6	61	14,92 €
EAR55-200	M55x2		13,4	7,6	75	68	7	68	21,80 €
EAR60-200	M60x2		13,4	7,6	80	73	7	73	23,77 €
EAR65-200	M65x2		14,5	8,7	85	78	7	78	31,12 €
EAR70-200	M70x2		14,5	8,7	92	84	8	84	33,43 €
EAR75-200	M75x2		15,5	9,7	98	90	8	90	38,99 €
EAR80-200	M80x2		16,5	10,7	105	97	8	97	42,28 €
EAR85-200	M85x2		17,5	11,7	110	102	8	102	49,18 €
EAR90-200	M90x2		17,7	11,9	120	110	10	110	54,38 €
EAR95-200	M95x2		18,7	12,9	125	116	10	116	59,12 €
EAR100-200	M100x2		19,7	13,9	130	120	10	120	64,16 €

Dimensions in mm


Our other products



DIL
Lever operated locking bolt, lever clamp



PML
Solid foot mount for heavy loads, \varnothing 100, 120 or 150



RPPM
RPP type belt per metre, RPP Steel cored polyurethane




CHA135
Screwed hinge, 135 degrees



Q6
Deep groove ball bearing, Steel



AT5M AT10M
AT type timing belt per metre, AT10 Steel cored polyurethane



BETASS
Hitch pin, Hitch



BAG-MI
Split shaft collar with clamp lever, Steel



ZBconique
Machined plastic bevel gear, 1:1



ACLCHAR
Hinge for aluminium profile, With



DZYSS
Stainless steel cylindrical stop,



DKONSL
Silicone conical elasto buffer, Male mounting

Complementary products



FUSS
Bearing locknut, Self locking locknut - stainless steel lock washer



LR
Precision locknut, Precision locknut



S_2R5
Deep groove ball bearing, Stainless steel



Q6
Deep groove ball bearing, Steel