


## Stainless steel 304L

Ratio  
**2:1**  
**3:1**  
**4:1**

- Module 0.8 to 2.5
- Teeth Gleason
- Material:  
stainless steel 304L
- Pressure angle 20°

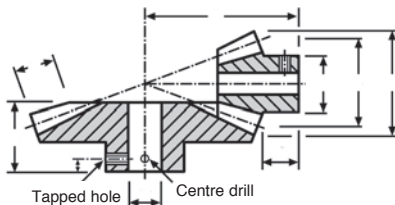

stainless steel

| TORQUE AND POWER INDICATION | For 20 teeth at 1000 rpm |         |         |          |         |         |
|-----------------------------|--------------------------|---------|---------|----------|---------|---------|
|                             | 2.5 MOD                  | 2.0 MOD | 1.5 MOD | 1.25 MOD | 1.0 MOD | 0.8 MOD |
| Torque (Nm)                 | 4.30                     | 2.20    | 0.94    | 0.71     | 0.57    | 0.14    |
| Power (kW)                  | 0.455                    | 0.231   | 0.097   | 0.08     | 0.03    | 0.015   |

### DISCOUNTS

| Qty   | 1+   | 6+   | 20+        |
|-------|------|------|------------|
| Disc. | List | -12% | On request |

| Part number | Teeth |        | Z     | Module | ØP    | E  | ØD | ØA    | ØM    | F     | G  | H    | Screw  |   | Price each<br>1 to 5 |
|-------------|-------|--------|-------|--------|-------|----|----|-------|-------|-------|----|------|--------|---|----------------------|
|             | Z     | Module |       |        |       |    |    |       |       |       |    |      | R      | T |                      |
| SSDB0.8-15  | 15    | 0,8    | 12,00 | 20,00  | 13,93 | 6  | 10 | 11,90 | 7,50  | 4,02  | M3 | 3,50 | 46,73  | € |                      |
| SSDB0.8-30  | 30    |        | 24,00 | 14,00  | 24,64 | 8  | 20 | 10,08 | 5,50  | 4,02  | M3 | 3,50 | 55,09  | € |                      |
| SSDB1-15    | 15    | 2:1    | 15,00 | 24,00  | 17,42 | 8  | 14 | 13,87 | 8,76  | 5,03  | M4 | 4,00 | 52,99  | € |                      |
| SSDB1-30    | 30    | 1      | 30,00 | 18,00  | 30,58 | 10 | 25 | 13,11 | 7,00  | 5,03  | M4 | 4,00 | 65,15  | € |                      |
| SSDB1.5-15  | 15    | 1,5    | 22,50 | 35,00  | 26,12 | 10 | 21 | 19,84 | 12,13 | 7,55  | M4 | 5,00 | 57,68  | € |                      |
| SSDB1.5-30  | 30    |        | 45,00 | 27,00  | 45,87 | 10 | 30 | 19,66 | 11,00 | 7,55  | M4 | 5,00 | 74,05  | € |                      |
| SSDB2-15    | 15    | 2      | 30,00 | 45,00  | 34,83 | 12 | 28 | 24,76 | 14,86 | 10,06 | M5 | 7,50 | 63,95  | € |                      |
| SSDB2-30    | 30    |        | 60,00 | 35,00  | 61,16 | 12 | 40 | 25,21 | 14,00 | 10,06 | M5 | 8,00 | 88,65  | € |                      |
| SSDB2.5-15  | 15    | 2,5    | 37,50 | 54,00  | 43,54 | 15 | 32 | 29,51 | 16,51 | 13,53 | M5 | 8,00 | 87,37  | € |                      |
| SSDB2.5-30  | 30    |        | 75,00 | 41,50  | 76,45 | 15 | 30 | 29,31 | 13,31 | 13,53 | M5 | 7,00 | 121,37 | € |                      |
| SSTB0.8-15  | 15    | 0,8    | 12,00 | 28,00  | 14,14 | 6  | 10 | 15,63 | 9,67  | 5,69  | M3 | 5,00 |        |   |                      |
| SSTB0.8-45  | 45    |        | 36,00 | 20,00  | 36,30 | 8  | 28 | 16,07 | 8,00  | 5,69  | M3 | 4,00 |        |   |                      |
| SSTB1-15    | 15    | 3:1    | 15,00 | 32,00  | 17,67 | 8  | 13 | 16,54 | 9,18  | 7,12  | M4 | 4,50 |        |   |                      |
| SSTB1-45    | 45    | 1      | 45,00 | 24,00  | 45,37 | 10 | 40 | 19,09 | 10,00 | 7,12  | M4 | 5,00 |        |   |                      |
| SSTB1.5-15  | 15    | 1,5    | 22,50 | 45,00  | 26,51 | 10 | 18 | 21,80 | 10,51 | 10,67 | M4 | 5,00 |        |   |                      |
| SSTB1.5-45  | 45    |        | 67,50 | 32,00  | 68,06 | 15 | 50 | 24,63 | 12,00 | 10,67 | M4 | 6,00 |        |   |                      |
| SSFB0.8-15  | 15    | 0,8    | 12,00 | 35,00  | 14,23 | 6  | 10 | 18,07 | 10,58 | 7,10  | M3 | 5,00 |        |   |                      |
| SSFB0.8-60  | 60    |        | 48,00 | 20,00  | 48,22 | 8  | 30 | 15,98 | 8,00  | 7,10  | M3 | 4,00 |        |   |                      |
| SSFB1-15    | 15    | 4:1    | 15,00 | 45,00  | 17,79 | 8  | 13 | 24,22 | 14,73 | 9,28  | M4 | 7,00 |        |   |                      |
| SSFB1-60    | 60    | 1      | 60,00 | 30,00  | 60,27 | 10 | 40 | 25,08 | 12,00 | 9,28  | M4 | 6,00 |        |   |                      |
| SSFB1.5-15  | 15    | 1,5    | 22,50 | 60,00  | 26,69 | 10 | 18 | 28,82 | 12,08 | 13,91 | M4 | 6,00 |        |   |                      |
| SSFB1.5-60  | 60    |        | 60,00 | 35,00  | 90,41 | 15 | 50 | 27,61 | 12,00 | 13,91 | M4 | 6,00 |        |   |                      |

Dimensions in mm

On request

## Our other products




Retaining cable for ball pin, Retaining cable



Bellows coupling Gerwah®, from 0.5 to 12Nm



Swivel castor with double brake, Steel - grey rubber



Mini leadscrew table with metric thread, 1kg



Cylindrical polymer bush, Universal polymer



Potentiometer,




Square hinge with riveted pin, not drilled, Square with riveted pin,...



Moulded plastic bevel gear (nylon), 1:1




Double row radial contact ball bearing, Radial contact - Steel



T type timing belt, T2.5 Steel cored polyurethane



Indexing plunger with flange, with drilled flange



RPP type belt per metre, RPP14 Steel cored polyurethane

## Complementary products



Steel bevel gear, 2:1



Machined plastic bevel gear, 2:1